



## INVITATION FOR BID (IFB)

SECTIONS B1 THROUGH B33 EXPLAIN IN DETAIL THE BID REQUIREMENTS  
August 17, 2016

**Solicitation Number  
B16-112 IP**

City of Colorado Springs Construction Project

**2D TRAIL IMPROVEMENTS: ROCK ISLAND  
TRAIL**

FOR  
CITY OF COLORADO SPRINGS  
PARKS & RECREATION DIVISION

**PRE-BID CONFERENCE**

A Pre-bid conference is not scheduled for this solicitation.

**BIDS DUE:**

**2:00 P.M., TUESDAY, SEPTEMBER 13, 2016**

Contact  
Izabela Podlecki  
Phone (719) 385-5287  
E-mail: [ipodlecki@springsgov.com](mailto:ipodlecki@springsgov.com)

**CITY OF COLORADO SPRINGS**

**SCHEDULE A**

**BID FORM**

The undersigned declares that it has carefully examined the bid information and the complete Solicitation, (The term solicitation means the complete invitation for bid) in submitting a bid for **“2D TRAIL IMPROVEMENTS: ROCK ISLAND TRAIL”** The Offeror’s signature will be considered the Offeror’s acknowledgment of understanding and ability to comply with all items in this solicitation.

If an Offeror makes any changes or corrections to the bid documents (such as white out, or writing over a figure, etc.) such changes or corrections must be initialed and dated by the person signing the offer prior to its submittal.

**TOTAL BID** will be evaluated and awarded as follows: The City of Colorado Springs intends to award a contract to the lowest responsible and responsive bidder as specified in B. 15. Each bidder will provide pricing for each area listed in the following documentation.

**OFFER**

<b>Item No.</b>	<b>Description</b>	<b>EST Quantity</b>	<b>Units</b>	<b>Unit Cost</b>	<b>Total Cost</b>
1	Clearing and Grubbing	1	LUMP SUM		
2	Grading (to include BMPs)	1	LUMP SUM		
3	Removal of existing asphalt along trail corridor	5741	LF		
4	12’ wide 5” thick Concrete Trail with fibermesh (saw cut joints)	27,471	CY		
5	4’ Red Breeze Gravel Shoulders	7,337	CY		
6	5’ wide 4” thick Concrete Trail with fibermesh (saw cut joints)	308	CY		
7	New 12’ wide ADA ramp	4	EA		
8	New 5’ wide ADA ramp	2	EA		
9	Top Soil Import	5940	CY		
10	Erosion Control Matting	9,900	SF		
11	3’ Concrete Wall (with weep holes)	400	LF		
12	18” Concrete curb	285	LF		
13	Rip Rap: 12”-48” Siloam Boulders	1790	SQ FT		
14	2 Rail: Peel Post and Rail Fence	1304	LF		
15	Foothills Seed Mix (at the Circle underpass, at trail relocations, and other disturbed areas.)	1	LUMP SUM		
16	Trail Detour Signage	1	LUMP SUM		
	<b>TOTAL BASE BID</b>				\$ _____

**Total Base Bid: \$** \_\_\_\_\_

**Construction Manager’s Supplemental Bid Notes: (if applicable)**

- 1) The owner shall select a testing agency and pay for soil proctors, compaction testing, and concrete testing. It will be the owner’s determination the amount and frequency of testing to be performed. The contractor shall be responsible to call owner’s representative a minimum of 24

## CITY OF COLORADO SPRINGS

hours in advance to schedule testing for work to be performed. Additional testing required for compliance due to non-compliance with specifications shall be paid by the contractor until compliance has been met.

- 2) The contractor shall coordinate inspections for the following: rough grading, fine grading, compaction, forming & reinforcement, concrete placement, vegetation of site, and final inspection. A minimum of 24 hours of notice to the owner's representative, agencies with jurisdiction, and designated parties is required prior to commencement of work.
- 3) The contractor shall submit a project schedule to the owner's representative prior to the pre-construction meeting. The contractor shall submit weekly updated schedules during the project until completion. The contractor shall submit a schedule of values to the owner's representative prior to the pre-construction meeting.
- 4) The contractor shall be responsible for cost and management of obtaining proper traffic control during the duration of the project. Supply, erect, and maintain construction safety fencing and proper BMPs as indicated on plans. Contractor shall remove fence from site upon project completion.
- 5) The contractor shall be responsible for cost and management of trail detour signage during the duration of the project. Supply, erect, and maintain detour signage. See Exhibit 8 for Parks, Recreation and Cultural Services Trail Detour Standards.
- 6) All survey and layout needed to perform the scope of work shall be considered incidental to the project and at the contractor's expense.
- 7) Remove and legally dispose of debris to an offsite location as needed to complete the project. Earthwork required to complete all contract work items including, but not limited to the following: export excess materials off-site, backfill, compaction, rough grading and final grading, and existing peel post and rail fence. These are an incidental costs to be paid by the contractor.
- 8) Acquire and manage all permits necessary to perform project. The contractor shall also call for utility locates and supply the owner's representative a copy of the locate sheets 72 hours prior to any earthwork activity.
- 9) The contractor shall clear and grub vegetation as necessary to conduct work and dispose of the debris legally offsite. To include pruning trees for a 12' tall corridor above the trail tread.
- 10) New 4000psi concrete: Curb and gutter per City of Colorado Springs Engineering Standards. New concrete for trail shall be 5" thick with fibermesh.
- 11) The contractor shall repair or replace any damaged areas during construction, including but not limited to concrete, asphalt, revegetation, trees, or trails. Any disturbed areas outside the scope of work shall be reclaimed with native seeding.
- 12) If the lowest responsible and responsive bid exceeds the City's budget, the City reserves the right to reduce estimated quantities to get within the available budget and award a contract that is within budget. This will only apply to the lowest responsible and responsive bidder at time of bid opening.

**PROVISIONS AND SPECIFICATIONS**

**INCLUSIONS:**

City of Colorado Springs – City Engineering Division Standard Specifications

City Of Colorado Springs - Parks, Recreation, and Cultural Services Standard Specifications

- 2230 SITE CLEARING (REVISED 2013)
- 2231 TREE PROTECTION AND PRUNING(REVISED 2013)
- 2300 EARTHWORK (REVISED 2013)
- 2751 CEMENT CONCRETE PAVEMENT (REVISED 2013)
- 2920 SEEDING AND SODDING (REVISED 2013)

CITY OF COLORADO SPRINGS

**BID FORM  
SIGNATURE PAGE**

By signing in this space, the contractor hereby certifies that this company is not presently debarred, suspended, proposed for debarment, declared ineligible or voluntarily excluded from bidding/proposing on any federal, state, county or municipal Invitations for Bids or Requests for Proposals.

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

\_\_\_\_\_  
Title

THE CONTRACTOR hereby Certifies that at the time of this certification, the Contractor does not knowingly employ or contract with an illegal alien and that the contractor has participated or attempted to participate in the basic pilot program in order to verify that the Contractor does not employ any illegal aliens. "Basic pilot program" means the basic pilot employment verification program created in Public Law 208, 104th Congress, as amended, and expanded in Public Law 156, 108th Congress, as amended, that is administered by the United States department of homeland security.

If awarded the contract, the undersigned hereby agrees to sign said Contract, and furnish the necessary bonds within ten (10) days of receipt of the "Notice of Award", of said contract, and to begin work within ten (10) days from the date of receipt of the "Notice to Proceed" and to complete the work within one hundred twenty (120) calendar days.

The undersigned acknowledges and understands the terms, conditions, Specifications and all Requirements contained and/or referenced and are legally authorized by the bidder to make the above bid statements or representations.

\_\_\_\_\_  
(Name of Company)

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Date)

\_\_\_\_\_  
(Address)

\_\_\_\_\_  
(City, State and Zip)

\_\_\_\_\_  
(Telephone Number)

\_\_\_\_\_  
(Name typed/Printed)

\_\_\_\_\_  
(Title)

\_\_\_\_\_  
(Facsimile Number)

**FEDERAL TAX ID #** \_\_\_\_\_

**This Company Is:** Corporation\_\_\_ Individual\_\_\_ Partnership\_\_\_ LLC\_\_\_

**Offeror hereby acknowledges receipt of the following amendments, if applicable** (Offeror agrees that it is bound by all Amendments identified herein)

AMENDMENT #1 \_\_\_\_\_ DATED: \_\_\_\_\_

AMENDMENT #2 \_\_\_\_\_ DATED: \_\_\_\_\_

AMENDMENT #3 \_\_\_\_\_ DATED: \_\_\_\_\_

**SCHEDULE B**

**INSTRUCTIONS TO BIDDERS**

**GENERAL INFORMATION**

City Contracting no longer maintains a bidders' list. All projects subject to formal competition are posted on Rocky Mountain E Purchasing ([www.rockymountainbidsystem.com](http://www.rockymountainbidsystem.com)) or in the lobby of our office at 30 S. Nevada Ave., Ste 201, Colorado Springs, CO 80903.

Rocky Mountain E-Purchasing system will provide you with convenient access to all bid information for the City of Colorado Springs as well as other local agencies throughout Colorado. To receive email alerts of open bids in your field please register with Rocky Mountain E Purchasing System and complete your online registration. All vendors are encouraged to register in order to access RFP's, IFB's, addenda, and awards.

If there are accompanying plans with this project, the fee (if any) will also be listed. Local vendors need to come in to our office to pick up the plans. Other interested parties can order the plans online and arrange payment and/or shipping of the project documents via check, Visa/MasterCard and your Fed-Ex number.

**B.1 BID ISSUE DATE**

Invitation for Bid (IFB) Number B16-112 IP 2D TRAIL IMPROVEMENTS: ROCK ISLAND TRAIL is being issued on August 17, 2016. Plans and Specifications will be incorporated into the bid solicitation.

**B.2 SUBMISSION OF BIDS**

B.2.1 Bids are to be submitted in a sealed envelope to City Contracting Office, 30 S. Nevada Ave., Suite 201, Colorado Springs CO. 80903. Photo ID is required to access the building.

B.2.2 Date/Time: Bids shall be received on or before: 2:00 P.M., Tuesday September 13, 2016.

B.2.3 Non-refundable Fee for Bidding Documents: \$N/A. Documents can be downloaded from web-site [www.rockymountainbidsystem.com](http://www.rockymountainbidsystem.com) at no charge.

B.2.4 Bid Bond is required if total bid exceeds \$100,000.00. (Also see B.12 and B.22)

\*\*\*\*\***LATE BIDS WILL NOT BE ACCEPTED**\*\*\*\*\*

**B.3 PRE-BID CONFERENCE**

B.3.1 The pre-bid conference is not scheduled for this solicitation.

**B.4 LATE BIDS/LATE MODIFICATIONS OF BIDS**

B.4.1 Bids received in the office designated in B.2 above, after the exact time set for opening are considered "late bids", and will not be accepted by the Bid Opening Official. Bidders are solely responsible for insuring their bids arrive on time and to the place of bids specified in the Invitation for Bid.

B.4.2 The City of Colorado Springs will not consider a late bid or late modification of bid unless:  
(1) There is conclusive evidence that the bid was submitted to the office designated in B.2 above, on time and was mishandled by the City of Colorado Springs ( i.e. lost or misplaced) City Contracting personnel responsible for handling/receiving bids. Mishandling by other units or offices of the City of Colorado Springs does not constitute City Contracting personnel.  
(2) Or – it was the only bid received.

**B.5 MISTAKES IN BIDS - CONFIRMATION OF BID**

When it appears from a review of the bid that a mistake has been made, the bidder may be requested to confirm their bid. Situations in which the confirmation may be requested include obvious, apparent errors on the face of the bid or a bid unreasonably lower than the other bids submitted. All mistakes in bids will be handled in accordance with the City of Colorado Springs Procurement Rules and Regulations.

**B.6 PROCUREMENT RULES AND REGULATIONS**

All formal Invitation for Bids (IFB) advertised by the City of Colorado Springs is solicited in accordance with the City's Procurement Rules and Regulations. The City's Procurement Rules and Regulations can be reviewed and/or downloaded from the City Contracting web-site [www.coloradosprings.gov/contracting](http://www.coloradosprings.gov/contracting). Any discrepancies or conflicting statements, decisions regarding bidding irregularities, clauses or specifications will be rectified utilizing the City's Procurement Rules and Regulations. It is the bidder's responsibility to advise the Contracting Specialist listed in these bidding documents of any potential discrepancies, conflicting statements, clauses or specifications prior to the bid opening date and time.

**B.7 MINOR INFORMALITIES/IRREGULARITIES IN BIDS**

B.7.1 A minor informality or irregularity is one that is merely a matter of form and not of substance. It also pertains to some immaterial defect in a bid or variation of a bid from the exact requirements of the invitation that can be corrected or waived without being prejudicial to other bidders. The defect or variation is considered immaterial when the effect on price, quantity, quality, or delivery is negligible when contrasted with the total cost or scope of the services being acquired.

B.7.2 If the City Procurement Services determines that the bid submitted contains a minor informality or irregularity, then the Manager shall give the bidder an opportunity to cure any deficiency resulting from a minor informality or irregularity in a bid, or waive the deficiency, whichever is to the advantage of the City. In no event will the bidder be allowed to change the bid amount. Examples of minor informalities or irregularities include but are not limited to the following;

B.7.2.1 Bidder fails to sign the Bid, but only if the unsigned bid is accompanied by other material evidence, which indicates the bidder's intention to be bound by the unsigned bid. (such as Bid bond, or signed cover letter which references the bid # and amount of bid).

B.7.2.2 Bidder fails to acknowledge an Amendment - this may be considered a minor informality only if the Amendment, which was not acknowledged, involves only a matter of form or has either no effect or merely a negligible effect on price, quantity, quality, or delivery of the item or services bid upon.

**B.8 REJECTION OF BIDS**

Any bid that fails to conform to the essential requirements of the invitation for bids will be rejected.

B.8.1 Any bid that does not conform to the applicable specifications shall be rejected unless the invitation authorizes the submission of alternate bids and the items or services offered as alternates meet the requirements specified in the invitation for bids.

B.8.2 A bid shall be rejected when the bidder imposes conditions that would modify requirements of the invitation or limit the bidder's liability to the City, since to allow the bidder to impose such conditions would be prejudicial to other bidders. For example, bids shall be rejected in which the bidder:

B.8.2.1 Protects against future changes in conditions, such as increased costs, if total possible costs to the City cannot be determined.

B.8.2.2 Fails to state a price and indicates that price shall be "price in effect at time delivery".

B.8.2.3 States a price but qualifies it as being subject to "price in effect at time of delivery".

CITY OF COLORADO SPRINGS

- B.8.2.4 Takes exceptions to the invitation for bids terms and conditions.
- B.8.2.5 Inserts the bidder's terms and conditions.
- B.8.2.6 Limits the rights of the City under any contract/invitation for bid clause.

**B.9 ESTIMATED QUANTITIES**

If the Bid schedule herein contains estimated quantities this provision is applicable. The quantities listed for each of the items in the bid schedule are only estimated quantities. Contractors are required to bid a firm Unit cost for each item specified. The actual quantities ordered may fluctuate up or down. The unit prices proposed by each bidder will remain firm and will not be re-negotiated if the estimated quantities are not met or are exceeded. This clause will take precedence over any/all other estimated quantity clauses that conflict with this clause.

For bidding purposes, if there is a conflict between the extended total of an item and the Unit Price, the Unit price shall prevail and be considered as the amount of the bid. All Unit prices shall include all necessary overhead and profit. Items not listed in the bid schedule such as overhead, profit, mobilization, de-mobilization, bonding, etc shall be distributed throughout the bidder's Unit Prices for the items listed in the bid schedule.

**B.10 NUMBER OF COPIES**

Bidder shall submit one (1) copy of its bid, signed in ink, and, if applicable, one (1) original copy of the Bid Bond as defined in B.12 and B.22.

**B.11 IDENTIFICATION OF BID**

Bids must be returned in a sealed envelope; solicitation number and date for submission of offers must be clearly marked on the outside in the lower left hand corner:

**Bid No.** **B16-112 IP 2D TRAIL IMPROVEMENTS: ROCK ISLAND TRAIL**

**Due Date & Time:** **September 13, 2016 - 2:00 P.M.**

**Company:** \_\_\_\_\_

Any offer that is submitted without being properly marked may be opened for identification prior to the deadline for receipt of offers and then resealed.

**B.12 BID BOND REQUIREMENTS**

A bid bond in the amount of five (5) percent of the bid amount is required to be submitted with your bid when (1) the total amount of your accumulative bid is more than \$100,000 or (2) is required elsewhere in this solicitation. This Bond must meet the conditions specified under Bond Requirements B.22 and shall be submitted using the form in Schedule F of this solicitation, or by submitting a cashier's check or certified check.

**B.13 SALES TAX**

The successful Offeror, if awarded a contract, shall apply to the Colorado Department of Revenue for a tax-exempt certificate for this project. The certificate does not apply to City of Colorado Springs Sales and Use Tax which shall be applicable and should be included in all proposals. The tax exempt project number and the exemption certificate only apply to County, PPRTA (Pikes Peak Rural Transportation Authority), and State taxes when purchasing construction and building materials **to be incorporated into this project.**

Furthermore, the exemption does not include or apply to the purchase or rental of equipment, supplies or materials that **do not become a part of the completed project or structure.** In these instances, the purchase or rental is subject to full taxation at the current taxation rate.

The Offeror and all subcontractors shall include in their Offer City of Colorado Springs Sales and Use Tax on the work covered by the offer, and all other applicable taxes.

Forms and instructions can be downloaded at <https://coloradosprings.gov/cat/government/tax-information/sales-tax>. Questions can be directed to the City Sales Tax Division at (719) 385-5903.

## CITY OF COLORADO SPRINGS

Our Registration Numbers are as follows:

City of Colorado Springs

Federal I.D.: 84-6000573

Federal Excise: A-138557

State Sales Tax: 98-03479

### **B.14 PREPARATION OF BID OFFER**

- B.14.1 Bidders are expected to examine the drawings, specifications, bid documents, proposed contract forms, terms and conditions, and all other instructions and solicitation documents. Bidders are expected to visit the job-site to determine all requirements and conditions that will affect the work. Failure to do so will not relieve a bidder from their responsibility to know what is contained in this invitation for bid, or site conditions affecting the work. In addition,
- B.14.2 The bidder certifies that it has checked all of its figures, and understands that the Owner will not be responsible for any errors or omissions on the part of the bidders in preparing its bid.
- B.14.3 All items, (unless the invitation specifically states otherwise) including any additive or deductive alternates on the bid schedule, **must** be completely filled out or the bid will be determined non-responsive and ineligible for consideration for award.
- B.14.4 The bidder declares that the person or persons signing this bid is/are authorized to sign on behalf of the firm listed and to fully bind the bidder to all the requirements of the solicitation.
- B.14.5 The bidder certifies that no person or firm other than the bidder or as otherwise indicated as any interest whatsoever in this bid/offer or the Contract that may be entered into as a result of this bid/offer and that in all respects the offer is legal and firm, submitted in good faith without collusion or fraud.
- B.14.6 By submitting a bid the bidder certifies that it has complied and will comply with all requirements of local, state, and federal laws, and that no legal requirements have been or will be violated in making or accepting this bid. Bidders are expected to review the City's Procurement Rules and Regulations (See B.6) which will be used when determining a bidder responsive and responsible and awarding contracts in the best interest of the City.
- B.14.7 If there is a discrepancy between the unit price and the total price, the unit price shall be used to determine the applicable total price. Bidders are responsible for including profit and overhead associated with the project when determining their unit prices.

### **B.15 BASIS OF AWARD**

The City of Colorado Springs intends to award a fixed unit price contract resulting from this solicitation to the lowest, responsive, responsible bidder, whose offer conforming to the solicitation, will be most advantageous to and in the best interest of the City of Colorado Springs, cost or price and other factors considered.

- B.15.1 In addition to other factors, bid/offers will be evaluated on the basis of advantages and disadvantages to the City that might result from offers received.
- B.15.2 The City reserves the right to reject any or all proposals and to waive informalities and/or irregularities in the bid offer.
- B.15.3 Total bid will be evaluated and awarded as follows: It is the City's intent to award this bid based on the **TOTAL BASE BID.**

### **B.16 PERIOD OF ACCEPTANCE**

The bidder agrees that its bid offer shall remain open for acceptance by the City for a period of forty five (45) calendar days from the date specified in the solicitation for receipt of bids.

### **B.17 CONTRACT AWARD**

The signature of the bidder indicates that within ten (10) calendar days from acceptance of its bid offer it will execute a contract with the City of Colorado Springs and if indicated in this solicitation,

furnish a project specific Certificate of Insurance naming the City of Colorado Springs as Additional Insured, furnish Performance, Labor and Materials, Payment and Maintenance Bonds and any other documents required by the Specifications or Contract Documents.

**B.18 NOTICE TO PROCEED**

Work may not start under any awarded contract until a written notice to proceed is issued by the City of Colorado Springs. The City of Colorado Springs may issue the Notice to Proceed any time after the contract is signed and, if required, insurance and bonds have been provided in accordance with B.22 below.

**B.19 AMENDMENTS TO THE SOLICITATION**

Amendments are also referred to as addendum or addenda; and these terms shall be considered synonymous. It is the bidder's responsibility to contact the Contracting Specialist listed in B.21 below to confirm the number of Amendments which have been issued.

B.19.1 If this solicitation is amended, then all specifications, terms and conditions, which are not amended, remain unchanged.

B.19.2 Bidders shall acknowledge receipt of any amendment to this solicitation (1) by signing and returning the amendment, (2) by identifying the amendment number and date in the space provided for this purpose on the form for submitting a bid offers, or (3) by letter or email.

B.19.3 Acknowledged amendments must be received prior to bid opening. Bidders are encouraged to include signed addenda or initialed acknowledgment with returned bids.

**B.20 EXPLANATIONS TO PROSPECTIVE OFFERORS**

Any prospective bidder desiring an explanation or interpretation of the solicitation documents, drawings, specifications, etc., must request it in writing soon enough to allow a reply to reach all prospective Offerors before the time for submission of offers. Oral explanations or instructions given before the opening of bids will not be binding. Any information provided to a prospective bidder during the bid preparation stage will be promptly furnished to all other prospective bidders as an amendment to the solicitation if that information is necessary in submitting bid offers or if the lack of it would be prejudicial to other prospective bidders. Also see the City's Procurement Rules and Regulations (See B.6).

**B.21 QUESTIONS AND OTHER REQUESTS FOR INFORMATION**

All questions shall be submitted in writing to the following specified individual. The preferred method of submitting written questions is via e-mail. All questions must be received prior to the cutoff date for questions which will be established at the pre-bid conference. Questions are due no later than **2:00 PM August 29, 2016.**

<b>All questions shall be directed to:</b>	<b><a href="mailto:izabela.Podlecki@springsgov.com">izabela Podlecki</a></b>	<b><a href="mailto:ipodlecki@springsgov.com">ipodlecki@springsgov.com</a></b>
--	--	---

**B.22 BOND REQUIREMENTS**

B.22.1 Bid (offer) Bond

- a) The Bidder is required to furnish with their bid a bid bond in the form of a certified check, cashier's check or surety bid bond acceptable to the Contracting Specialist in the sum equal to at least 5% of the total amount of the bid payable without condition to the City of Colorado Springs if; (1) the total amount of your accumulative bid is more than \$100,000 or (2) is required elsewhere in this solicitation.
- b) The Bid Bond shall guarantee that the bid will not be withdrawn or modified for a period of sixty calendar days after the time set for the receipt of bid offers, and if accepted within those sixty calendar days, that the person, firm or corporation submitting same shall within ten (10) calendar days after being notified of the acceptance of its bid offer, enter into a Contract and furnish the required bonds and all insurance certificates called for under this invitation for bid.
- c) The Bid Bonds of unsuccessful bidders will not be returned to the respective bidders

## CITY OF COLORADO SPRINGS

unless a self addressed stamped envelope is provided along with a written request for bid bond return. However, if a certified check or a cashier's check is submitted in lieu of the Bid Bond, it will be returned as soon as possible after the lowest responsive and responsible bidder is determined and a contract is executed.

- d) In the event the bidder whose bid offer is accepted fails to enter into the contract and/or furnish the proper bonds, its certified check, cashier's check or surety bid bond will be forfeited in full to the City.

### B.22.2 Performance, Labor and Materials Payment, and Maintenance Bonds

The Contractor shall furnish to the City of Colorado Springs one copy of each; Performance Bond, Labor and Materials Payment Bond, and a Maintenance Bond in the amount of 100% of the total contract within ten (10) calendar days after notification of award of a contract. The cost of all bonds shall be included in Contractor's bid offer.

#### B.22.2.1 Bonds shall:

- a) Be for the full amount of the contract price.
- b) Guarantee the Contractor's faithful performance of the work under this contract, and the prompt and full payment for all labor and materials involved therein.
- c) Guarantee protection to the City of Colorado Springs against liens of any kind.
- d) Be, when a surety bond is furnished, from a surety company operating lawfully in the state of Colorado and shall be accompanied with an acceptable "Power-of-Attorney" form attached to each bond copy.
- e) Be issued from a surety company that is acceptable to the City of Colorado Springs.
- f) Be submitted using the forms in the Exhibit section of this solicitation.

## B.23 SPECIFICATIONS AND DRAWINGS

B.23.1 No Fee solicitations: All interested bidders may obtain one copy of the Project Specifications and a set of the project drawings for use in preparing your bids. If the bidder requires additional sets, it is their responsibility to duplicate at their own expense additional copies.

B.23.2 Fee solicitations: All interested bidders may purchase up to three copies of the Project Specifications and project drawings for use in preparing your bids. If the bidder requires additional sets, it is their responsibility to duplicate at their own expense.

B.23.3 Upon award of the contract, the City will be responsible for furnishing the selected contractor a minimum of three (3) sets of both the specifications and drawings. The City will also provide any returned sets that may be available. However, in no event shall the City be required to pay for the reproduction of more than 3 sets of each.

B.23.4 Specifications are included in this solicitation.

## B.24 TYPE OF CONTRACT

It is the intent of this Invitation for Bids (IFB) to award a firm fixed unit price Contract based on the prices offered by the lowest responsive and responsible bidder. Contract prices shall remain firm and fixed throughout the contract performance period.

## B.25 F.O.B. DESTINATION

Unless otherwise specified in the invitation for bid, all goods, materials, supplies, equipment or services covered by this solicitation shall be delivered F.O.B. destination, all freight charges prepaid and allowed, within the city limits of the City of Colorado Springs, Colorado, at the location indicated in the awarded contract or purchase order.

## B.26 BID RESULTS

The City of Colorado Springs does not mail bid results or tabulations. However, bid tabulations are posted and can be downloaded from Rocky Mountain E Purchasing System ([www.rockymountainbidsystem.com](http://www.rockymountainbidsystem.com)).

Bid tabulations will also be email upon request. To request bid tabulation, please contact Contracting Specialist in B.5.

**B.27 TERMS, CONDITIONS AND SPECIAL PROVISIONS**

Bidders are advised to pay special attention to Schedule D, General Construction Terms and Conditions and Schedule E Technical Specifications. These schedules may contain requirements that will have an impact on all potential bidders, such as Liquidated Damages, Indemnification, DBE participation, type of contract, and delivery schedule.

**B.28 APPROPRIATION OF FUNDS**

B.28.1 In the event funds are not appropriated in whole or in part sufficient for performance of the City's obligations under this solicitation or appropriated funds may not be expended due the City Charter spending limitations, then the City may terminate this solicitation or award of this solicitation without compensation to bidders.

B.28.2 In accordance with the City Charter, performance of the City's obligations under any resultant Agreement or Contract is expressly subject to appropriations of funds by the City Council or receipt of Federal Grant Funds, and the City may terminate that Agreement or Contract without compensation to the Contractor.

**B.29 EQUAL EMPLOYMENT OPPORTUNITY**

B.29.1 In connection with this procurement, the contractor shall not discriminate against any employee or applicant for employment because of race, color, religion, sex, national origin, age, marital status or disability. The contractor will take affirmative action to ensure that all applicants are employed and that employees are treated during employment without regard to their race, color, religion, sex, national origin, age, marital status or disability. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship.

- a) The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor; state that all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, age, or national origin.
- b) The Contractor will comply with all equal employment opportunity provisions, rules, regulations and executive orders issued by the City of Colorado Springs, State of Colorado and the Secretary of Labor.
- c) The Contractor will furnish all information and reports required by any equal employment opportunity provisions, rules, regulations and executive orders and will permit access to its books, records, and accounts for purposes of investigation to ascertain compliance with such Rules, Regulations, and Orders.
- d) In the event of the Contractor's noncompliance with the nondiscrimination clauses of this contract or with any of such Rules, Regulations, or Orders, this contract may be canceled, terminated or suspended in whole or in part and the Contractor may be declared ineligible for further City contracts.

**B.30 PERIOD OF PERFORMANCE**

The contractor shall complete all work within **90 Calendar Days** after the Notice-to-Proceed as per the Specifications and Drawings. The contractor will start work promptly after receipt of the Notice-to-Proceed and continue to work diligently until all work is completed and accepted by the City.

**B.31 ILLEGAL ALIENS - PUBLIC CONTRACTS FOR SERVICES**

Illegal Aliens - Public Contracts for Services - Compliance with Title 8, Article 17.5, Colorado Revised Statutes:

The Contractor acknowledges, understands, agrees, and certifies that: In the performance of any work or the provision of any services by the Contractor under this Contract, the Contractor shall not knowingly employ or contract with an illegal alien to perform work under this contract; or Enter into a contract with any subcontractor that fails to certify to the contractor that the subcontractor

shall not knowingly employ or contract with an illegal alien to perform work under this Contract or under the subcontract to this contract. In The Contractor certifies in accord with Section 8-17.5-102(1) C.R.S. that, on the date the Contractor signs this contract, the Contractor does not knowingly employ or contract with an illegal alien who will perform work under this contract and that the Contractor shall participate in the e-verify program or Colorado Department of Labor and Employment program in order to confirm the employment eligibility of all employees who are newly hired for employment or to perform work under this contract. The contractor is expressly prohibited from using basic pilot program procedures to undertake pre-employment screening of job applicants while this Contract and any services under this Contract is being performed. If the contractor obtains actual knowledge that a subcontractor performing work under the public contract for services knowingly employs or contracts with an illegal alien, the Contractor shall notify the subcontractor and the City within three days that the contractor has actual knowledge that the subcontractor is employing or contracting with an illegal alien, and terminate the subcontract with the subcontractor if within three days of receiving the notice the subcontractor does not stop employing or contracting with the illegal alien; except that the contractor shall not terminate the contract with the subcontractor if during the three days the subcontractor provides information to establish that the subcontractor has not knowingly employed or contracted with an illegal alien. The Contractor shall comply with any request by the City, federal government, or the Colorado Department of Labor and Employment made in the course of an investigation that the department, pursuant to the authority established in Section 8-17.5-102 C.R.S., or a City or federal investigation. If the contractor violates or fails to comply with any provision of C.R.S. 8-17-101 et seq, the City may terminate this Contract for breach of contract. If this contract is so terminated, the Contractor shall be liable for any actual and consequential damages to the City.

### **B.32 FORCE MAJEURE**

In the event of either party being rendered unable wholly, or in part, by force majeure to carry out its obligations under this Agreement, then on such party's giving notice and full particulars of such force majeure in writing to the other party as soon as possible after the occurrence of the cause relied on, the obligation of the party giving such notice, so far as it is affected by force majeure, shall be suspended during the continuance of any inability so caused, but for no longer period, and such cause shall, as far as possible, be remedied with all reasonable dispatch. The term "force majeure" as employed herein shall mean acts of the public enemies, wars, blockages, insurrections, landslides, earthquakes, fires, and floods

### **B.33 BID DOCUMENTS**

B.34.1 The following listed documents must be included with your bid in order for your bid submittal to be considered responsive. Use this list as a checklist to make sure all required documents are submitted.

1. Schedule A, Bid Form
2. Bid Bond if applicable (see B.22), Exhibit 1
3. Representations and Certifications, Exhibit 5
4. Minimum Insurance Requirements, Exhibit 7
5. Addendums if issued

**SCHEDULE C**  
**GENERAL CONSTRUCTION TERMS AND CONDITIONS**

**SECTION 100 DEFINITIONS AND TERMS**

Titles used in these specifications having a masculine gender, such as “workmen” and the pronouns “he” or “his”, are for the sake of brevity and are intended to refer to persons of any gender.

The titles or headings of the sections and subsections herein are intended for convenience of reference and shall not have any bearing on their interpretation.

When the Contract indicates that something “shall” be done, the action is required and is not discretionary.

Calendar Day Each and every day shown on the calendar, beginning and ending at midnight.

Change Order A written order issued to the Contractor by the City covering contingencies, extra work, increases or decreases in Contract quantities, and additions or alterations to the plans or specifications, within the scope of the Contract, and establishing the basis of payment and time adjustments for the work affected by the changes. The Change Order is the only method authorized for changing the Contract.

City The City of Colorado Springs, Colorado.

Contract Documents Contract Documents include the Request for Proposal, Instructions to Offerors, Proposal, Amendments, the signed Contract, surety bonds, insurance documents, all terms, conditions, and provisions, and the Specifications, including all modifications thereof incorporated in any of the documents before execution of the agreement.

Contract The executed written agreement between the City and the Contractor setting forth the obligations of the parties for the performance of the work and the basis of payment. The Contract includes the Contract Documents, Notice to Proceed, and executed Change Orders, all of which constitute one instrument.

Contractor The person, persons, firm, or corporation to whom a Contract is awarded by the City and who is subject to the terms of said Contract. Contractor shall include the agents, employees, workmen, subcontractors and any assignees of said Contract.

Engineer An engineer of the City of Colorado Springs.

Notice Any written notice served pursuant to the terms of the Contract. Notice shall be deemed to have been duly served if delivered in person or by registered mail to:

**CITY OF COLORADO SPRINGS**

The Project Manager assigned to the Contract, City of Colorado Springs, City Engineering, 30 South Nevada Ave., Room 403, Colorado Springs, CO 80903.

Notice to the Contractor will be to the Authorized Representative of the Contractor at the site of the Project in person; or by registered mail to the Contractor's principal place of business as indicated in the Contractor's proposal certifications; or as to the Surety on the performance bond by registered mail to the Surety at the home office of such surety.

Plans	The drawings, or reproductions, provided by the City that show the location, character, dimensions, and details of the work to be done.
Project Manager	An individual representing the City responsible for managing and oversight of the Contract.
Project	The entire improvement outlined in the Scope of Services which is to be constructed in whole or in part pursuant to the Contract.
Subcontractor	A person, firm, or corporation, other than the Contractor, supplying labor or materials, or both, or equipment furnished at the site of the project under an Agreement with the Contractor.
Surety	The person, firm, or corporation that has executed as surety the Contractor's Proposal, Performance, Payment and Maintenance Bonds.
Work	Work performed under the Contract.
Working Days	Days of the week, not including weekends and City holidays, unless otherwise stated.

**SECTION 101 CONTRACT DOCUMENT INTERPRETATION**

**101.00 INTENT OF CONTRACT DOCUMENTS**

The sections of the Contract Documents are complementary, and what is called for by any one shall be as binding as if called for by all. The intent of the Contract Documents is to include the cost of all labor and materials, water, fuel, tools, plants, equipment, light, transportation, and all other expenses as may be necessary for the proper execution of the work. If the Contract Documents should be contradictory in any part, the order of precedence shall be as described in the Contract.

Any work shown on the Plans and not covered in the specifications, or included in the Specifications and not shown on the Plans, shall be executed by the Contractor as though shown both on the Plans and included in the Specifications.

If the Contractor, in the course of the work, finds any discrepancy between the Plans and the physical layout, or any errors or omissions in Plans or layout, he shall immediately so inform the Project Manager and the Project Manager will promptly verify them. Any work done after such discovery without written consent of the Project Manager authorizing the same shall be done at the Contractor's risk and sole expense.

## CITY OF COLORADO SPRINGS

Any incidental and/or appurtenant items not specifically called for in the Plans and Specifications, but which are necessary to complete the work in accordance with the requirements of good practice, as determined by the Project Manager, shall be included as a part of the Contractor's proposal price and furnished at no additional cost to the City.

In interpreting the Contract Documents, words describing materials or work which have a well-known technical or trade meaning, unless otherwise specifically defined in the Contract documents, shall be constructed in accordance with such well known meaning recognized by architects, engineers, and the trade.

### **101.01 SPECIAL PROVISIONS, SPECIAL SPECIFICATIONS**

Special Provisions or Special Specifications may be written to expand upon, modify or cancel these general provisions or the standard specifications.

### **101.02 STANDARD MANUFACTURER**

Wherever the terms "standard", "recognized" or "reputable" manufacturers are used, they shall be construed as meaning manufacturers who have been engaged in the business of fabricating materials, equipment, or supplies of the nature called for by the Specifications for a reasonable period of time prior to the date set for submission of proposals, and who can demonstrate to the satisfaction of the City that said manufacturer has successfully installed equipment, materials, or supplies of the type proposed to be furnished in at least three instances and that the performance of such materials, equipment, or supplies for a period of over twelve months prior to the date fixed for submission of proposals shall, prima facie, be deemed to have been engaged in such business for a reasonable length of time.

### **101.03 "OR EQUAL" CLAUSE**

Whenever in any section of the Contract documents, any article, material, or equipment is defined by describing a proprietary product, or by using the name of manufacturer or vendor, the term "or equal" if not inserted, shall not be construed in such a manner as to exclude manufacturers' products of comparable quality, design, and efficiency, subject to review and approval by the Project Manager. The Project Manager may require that proposed equals be submitted for review and approval.

## **SECTION 102 COMPLIANCE WITH LAWS**

### **102.00 PUBLIC IMPROVEMENT ASSESSMENT**

If the cost of the improvement to be constructed under the Contract is to be assessed upon the owners of land benefited by such improvement, upon complaint of any such landowner that the improvement is not being constructed in accordance with the Contract, the City Council may consider the complaint and make such order in the premises as shall be just to ensure compliance with the Contract.

### **102.01 ALL LEGAL PROVISIONS INCLUDED**

It is the intention and agreement of the parties to this Contract that all legal provisions of law required to be inserted, shall be and are inserted. However, if by mistake or otherwise, some such provision is not inserted, or is not inserted in proper form, then upon application of either party, the Contract shall be amended so as to strictly comply with the law and without prejudice to the rights of either party.

## **102.02 LICENSES AND PERMITS**

It shall be the responsibility of the Contractor to obtain, at its expense, all necessary licenses and permits to do the Project, in accordance with applicable Federal, State and local laws, regulations and ordinances. Typical permits and fees include, but are not limited to, Excavation/Boring Permits, Concrete Construction Permits, Fugitive Dust Permits, Regional Building Permits, Pavement Degradation fees, as well as Traffic Control and Barricade Plans to be approved by the City Traffic Division for all work within public rights-of-way and easements i.e. (curb and gutter, sidewalks, pedestrian ramps and cross pans).

## **SECTION 103 AWARD AND EXECUTION OF CONTRACT**

### **103.00 CONTRACT EXECUTED**

A single original Contract to include the Contractor's Performance, Labor and Material Payment and Maintenance Bonds may be executed and maintained in the official Contract file located in the City Contracts office. The original copy of the Contract maintained in the City Procurement Services file shall take precedence for purposes of interpretation or determining what the Contract says. After all required signatures are obtained; photocopy counterparts (copies) will be made and distributed to the following, as applicable:

- (a) Contractor
- (b) Project Manager
- (c) City Finance Department
- (d) Inspector

Each Bond shall have an original Power of Attorney attached. The Contractor shall provide compensation insurance and public liability and property damage insurance as outlined in the Contract. The costs of executing the bonds, Contract, and insurance, including all notaries' fees and expense, are to be paid by the Contractor to whom the Contract is awarded. Bonds shall be furnished on forms prepared by the City. Copies of the City's Bond Forms are included in the Exhibits Section of the Request for Proposal, if applicable.

### **103.01 VERBAL AGREEMENTS**

No verbal agreements or conversations with any agent or employee of the City either before or after execution of the Contract shall affect or modify any of the terms or obligations contained in any of the documents comprising the Contract.

### **103.02 CONTRACT SECURITY**

The Contractor shall furnish good and sufficient Performance, Labor and Material Payment and Maintenance Bonds on the form attached hereto in an amount not less than the full amount of the Contract price as security for the faithful performance of the Contract, for the payment of all persons performing labor and furnishing material in connection with the work, and for all guarantees of materials and workmanship required in the Contract. If at any time during the continuance of the Contract a surety on the Contractor's bond or bonds becomes irresponsible, as determined in the City's sole and absolute discretion, the City shall have the right to require additional and sufficient sureties which the Contractor shall furnish within ten (10) days after written notice to do so. Any additional surety bonds shall cover the entire original Contract amount and any increases thereto.

### **103.03 INDEPENDENT CONTRACTOR**

In the performance of the Contractor's obligations under this Contract, it is understood, acknowledged and agreed between the parties that the Contractor is at all times acting and performing as an Independent Contractor, and the City shall neither have nor exercise any control or direction over the manner and means by which the Contractor performs the Contractor's obligations under this Contract, except as otherwise stated within the Contract terms. The City shall not provide any direction to the Contractor on the work necessary to complete the Project. Contractor understands that it is an independent contractor responsible for knowing how to perform all work or tasks necessary to complete Project. The Contractor understands and agrees that the Contractor and the Contractor's employees, agents, servants, or other personnel are not City employees. The Contractor shall be solely responsible for payment of salaries, wages, payroll taxes, unemployment benefits or any other form of compensation or benefit to the Contractor or any of the Contractor's employees, agents, servants or other personnel performing services or work under this Contract, whether it be of a direct or indirect nature. Further in that regard, it is expressly understood and agreed that for such purposes neither the Contractor nor the Contractor's employees, agents, servants or other personnel shall be entitled to any City payroll, insurance, unemployment, worker's compensation, retirement or any other benefits whatsoever.

## **SECTION 104 THE CONTRACT: FOLLOWING EXECUTION**

### **104.00 MATERIALS**

Unless otherwise stipulated in the Contract, the Contractor shall provide and pay for all materials, labor, water, tools, equipment, light power, transportation, and other facilities necessary for the execution and completion of the work. The Contractor shall, if required, furnish satisfactory evidence as to the kind and quality of materials.

### **104.01 SCHEDULE**

In the event of contradictions or inconsistencies, this clause shall take precedence over any language relevant to scheduling included anywhere else in this Contract.

The Contractor shall be responsible for planning, scheduling, and reporting the progress of the work to ensure timely completion of the work as called for in the Contract Documents. The Contractor shall prepare a detailed Project schedule ("Project Schedule") that shall be used for coordination, for evaluation of progress, and for the evaluation of changes to the Contract. The Project Schedule shall include all activities, including those of subcontractors, Contractor's engineers and surveyors, and suppliers. Seasonal and weather constraints, utility coordination, railroad restrictions, right of way restrictions, traffic constraints, environmental constraints, other project interfaces, expected job learning curves and other constraints shall be considered when preparing the Project Schedule, including any phasing or sequencing of the work specified in the Contract Documents. Days scheduled as no work days shall be indicated. The Project Schedule shall consist of a Methods Statement as defined in subsection (a) below and a progress schedule consisting of (1) a Critical Path Method ("CPM") schedule as defined in subsection (b) below, or (2) a Bar Chart schedule as defined in subsection (c) below. A CPM Schedule shall be required if the Contract exceeds \$250,000 or if the construction period exceeds 150 Calendar Days, unless the Contract Documents stipulate otherwise. The CPM Schedule shall utilize Primavera's Suretrak Project Manager software (or other software designated by the Project Manager), or be capable of being read and manipulated by Suretrak Project Manager software (or other software designated by the Project Manager). The Project Schedule shall show all work completed within the Contract Period of Performance. The City reserves the right to approve or disapprove any proposed schedule. If disapproved, the Contractor must make requested changes and resubmit the schedule for approval within five working days of the disapproval by the City.

## CITY OF COLORADO SPRINGS

After award, the Contractor shall submit two copies of all required schedule information as described below. Schedules, schedule updates, diagrams and reports using CPM shall also be submitted electronically in the appropriate software format. All schedules, diagrams, and reports shall include a title, project number, date of preparation, and the name of the Contractor.

The Bar Chart or CPM 90-day schedule shall be submitted at least 14 Calendar Days prior to the start of the work. The Project Manager's review will not exceed five working days. Work shall not begin until the Project Schedule is accepted in writing, unless otherwise approved by the Project Manager.

(a) **Methods Statement.** A Methods Statement shall be prepared for the prominent features listed in the Contract Documents, and for any feature not listed in the Contract Documents that the Contractor considers a controlling factor for timely completion. The Methods Statement shall be a detailed narrative describing each feature and all work necessary to complete the feature. The Methods Statement shall be submitted with the Contractor's schedule. The following format is required:

1. **Feature:** Name of the feature;
2. **Responsibility:** Contractor, subcontractor, supplier, utility, etc. responsible for the feature;
3. **Procedures:** Procedures to be used to complete the work. The procedure to be used shall include general information regarding methods such as forming, excavation, pouring, heating and curing, backfill and embankment, trenching, protecting the work, etc. When separate or different procedures are to be employed by the Contractor due to seasonal or Project phasing requirements, such differing procedures shall be described in the procedure statement;
4. **Production Rates:** The planned quantity of work per day for each feature;
5. **Labor Force:** The labor force planned to do the work;
6. **Equipment:** The number, types, and capacities of equipment planned to do the work;
7. **Work Times:** The planned time for the work to include:
  - (a) number of work days per week
  - (b) number of shifts per day
  - (c) number of hours per shift

At the Project Manager's request, the Contractor shall update the Methods Statement, or any part thereof, and submit it with the Job Progress Narrative Report or Schedule Update, whichever is earlier.

(b) **Critical Path Method.** CPM is a scheduling method which shows the interdependencies between work activities. The critical path is that path through the schedule which, if delayed, will cause a delay to project completion.

The progress schedule shall include as a minimum the prominent features of this Project as listed in the Contract Documents. The progress schedule shall include all activities for all work on the Project, including subcontracted work, delivery dates for critical material, submittal and review periods, milestone requirements and no work periods. Where the Project has specific phases, each phase shall be described separately for each applicable prominent feature.

CITY OF COLORADO SPRINGS

Construction activity duration shall not exceed 15 Calendar Days unless approved by the Project Manager. Series of activities that have aggregate durations of five Calendar Days or less may be grouped in a single activity. For example, “form, reinforce, and pour pier” could be defined as a single activity rather than three. Single activities or a series of grouped activities of at least one Calendar Day duration may also need to be included in the Project Schedule as determined by the Project Manager (e.g. same activities but noted separately by location).

Time Scaled Logic Diagram: This diagram shall show the logical progression of all activities required to complete the work defined in the Contract Documents. Activity information shall include activity ID, description, duration, early start and finish dates, late start and finish dates, total float, and responsibility.

1. 90-Day Schedule. The 90-Day Schedule shall provide all necessary detail for procurement, construction and submittal activities required during the first 90 days of the Period of Performance. This submittal shall include a Time Scaled Logic Diagram.

2. Project Schedule, as described above.

The Project Schedule shall cover the entire Period of Performance.

3. Schedule Updates. The Contractor shall update the 90-Day Schedule or the Project Schedule to reflect actual construction progress of all work activities on the project. Updates shall show the previous 30 days progress and a 60-day projection for all work started, completed, or in progress during this three month window.

The Project Schedule shall be updated as of the cutoff date for the monthly progress pay estimate and submitted to the Project Manager before the payment of the progress pay estimate is approved.

Each of the diagrams, charts, and reports shall comply with the requirements for the Project Schedule above, except that they shall also include the actual completion dates and percentages of completion for the appropriate activities.

(c) Bar Chart. The Bar Chart shall be time scaled and shall show the following:

1. The prominent features, as listed in the Contract Documents.
2. Any feature not listed in the Contract Documents that the Contractor considers a controlling factor for timely completion.
3. The number of days required to complete each feature and its relationship in time to other features.
4. Sufficient space for each feature to permit two additional plots parallel to the original time span plot.
5. The anticipated delivery dates for equipment or materials in any feature that could affect timely completion of the project.
6. Critical completion dates for any activity within any feature that could affect timely completion of the project.
7. Connecting lines between features that show the intended progression of activities.

**CITY OF COLORADO SPRINGS**

The Project Schedule shall cover the time from the Day of Notice to Proceed to the predicted completion date. The Project Schedule shall be updated as of the cutoff date for the monthly progress pay estimate and submitted to the Project Manager before the payment of the progress pay estimate is approved. The Contractor shall provide a copy of the original bar chart showing, for each feature, the days actually worked and the anticipated days required to complete.

- (d) Project Coordination. The Contractor shall coordinate and schedule its work to include anticipated utility work. Various City and private utility entities may be working to install and/or inspect their utilities within the Project area. Reasonable delays should be expected for utility lowering, relocations and placement. These delays shall not be reason for granting any monetary change or performance time alteration to the Contract. As a minimum, the Contractor's Project Schedule shall reflect coordination with the following:
1. City of Colorado Springs City Engineering Division
  2. City of Colorado Springs Traffic Engineering Division
  3. Colorado Springs Utilities (water, wastewater, gas, electric)
  4. City of Colorado Springs Parks, Recreation and Cultural Services Department
  5. Private Utility and Telecommunication Companies
- (e) Contractor Early Finish or Voluntary Acceleration. Early finish or voluntary acceleration of the schedule by the Contractor is acceptable provided:
1. At the time the Contractor submits the Project Schedule indicating an early finish or voluntary acceleration, the City is notified in writing of actions on the City's part necessary to accommodate the change(s).
  2. The City agrees to such change(s) in writing.
  3. The City is compensated by the Contractor for any inconvenience or expense associated with the change(s).
  4. There is no increase to Contract cost.

A Job Progress Narrative Report shall be submitted bi-weekly as a minimum and with all Project Schedule updates. It shall detail the description of job progress, problem areas, current and anticipated delaying factors and their anticipated effects, impacts to job milestones or Project completion, any corrective action proposed or taken, and any minor revisions to the Project Schedule. If the Job Progress Narrative Report indicates problem areas and impacts to job milestones or Project completion, a revised Project Schedule shall also be submitted as specified below.

Revision of the Project Schedule may be required, as determined by the Project Manager, for: a major revision in the schedule logic or methods of construction; the addition, deletion, or revision of activities required by Contract modification; delays in milestones or the completion of the Project; or for prosecution of work that revises the phasing or staging which is represented on the plans or on the progress schedule. If in the opinion of the Project Manager, the Contractor falls behind the approved Project Schedule, the Contractor shall take steps necessary to improve Project progress, including those steps that may be required by the Project Manager, without additional costs to the City. In those circumstances where the Contractor is behind schedule, the City may require the Contractor to increase the number of shifts, overtime operations, days of

work, and/or the amount of construction planned and to submit such changes and revisions to the Project Schedule to the Project Manager for approval that will demonstrate how the approved rate of required progress will be regained. Failure of the Contractor to comply with the requirements of the Project Manager under this subsection shall be grounds for a determination by the City that the Contractor is not prosecuting the work with sufficient diligence to ensure timely completion of the Contract as required.

If it is determined that a revision to the Project Schedule is required, it shall be provided to the Project Manager for review within 15 Calendar Days of Contractor receiving written notification of the requirement from the Project Manager. The Project Manager's review of the revised schedule will not exceed 5 working days. Revisions required as a result of the Project Manager's review shall be submitted within 5 working days. When accepted by the Project Manager in writing, the revised schedule shall become the Project Schedule.

The Contractor shall participate in the Project Manager's review and evaluation of the submittals. Meetings will be held to review progress and planning when requested by the Project Manager or Contractor. The Project Manager may request additional project scheduling information and documentation as deemed necessary, including reports and other information that may be reasonably generated using CPM software if required by the Contract.

The Contractor shall prosecute the work according to the Project Schedule. The Contractor shall be responsible for assuring that its subcontractors, suppliers, and engineers/surveyors, at any tier, also prosecute the work according to the Project Schedule. The City shall be entitled to rely on the Project Schedule for planning and coordination.

Acceptance of the Contractor's Project Schedule by the Project Manager is not to be construed as relieving the Contractor of obligation to complete the Contract work within the Contract time allowed for the portion of the work or the entire Contract, or granting, rejecting or in any other way acting on the Contractor's request for extension of Contract time, or claims for additional compensation.

All costs relating to preparation, submittal, and acceptance of the Project Schedule, reports and revisions, and all requirements of this subsection will not be paid for separately, but shall be included in the work.

Failure of the Contractor to comply with the requirements of this subsection may be grounds for a determination by the Project Manager that no further progress payments are to be made until the Contractor is in full compliance.

## **104.02 SCHEDULE OF VALUES**

Promptly following the execution of the Contract Documents for all Firm Fixed Price, lump sum Contracts, the Contractor shall prepare and transmit to the Project Manager two copies of an itemized Project cost breakdown showing the unit quantities of each major construction item and the corresponding unit prices. Such unit prices shall contain all costs including profit and overhead of each item complete in place. The total cost of all the items shall equal the Contract price for the Project. This breakdown, once approved by the Project Manager, will be used primarily in determining payment due the Contractor as provided herein. If, in the opinion of the Project Manager, any unit price submitted by the Contractor is unbalanced, a detailed breakdown of the items contained in the unit will be required.

For Contracts executed on a fixed unit price basis, payment shall be made based on the actual number of units installed or performed that are complete, however, payment shall not exceed the total Contract amount unless previously approved by Change Order.

### **104.03 SURVEYS**

Unless otherwise specified in the Contract Documents, the City will furnish all site surveys, easements, pipeline licenses, etc., necessary to authorize construction of any permanent works required in the Contract, where such work is to be done on property other than the City's.

The Project limits of construction shall be within the public right-of-way and/or City easements. The Contractor shall not trespass on premises outside of the limits of construction for this Project, unless permission to do so is granted by the property owner in writing. Copies of any such grant shall be furnished to the City prior to the performance of any work outside the limits of construction.

### **104.04 SUBCONTRACTS**

The Contractor will be permitted to subcontract a portion of the Contract; however, the Contractor shall perform work amounting to 30 percent or more of the original total cost of proposal items. Any items designated in the Contract as "specialty items" may be performed by subcontractor. The cost of "specialty items" so performed by subcontractor may be deducted from the original total cost of proposal items before computing the amount of work required to be performed by the Contractor.

The calculation of the percentage of subcontracted work shall be based on the Contract unit prices rather than subcontract unit prices. Proportional value for a subcontracted partial Contract item will be verified by the Project Manager. For the purpose of calculating the value of subcontracted work, the cost of procuring materials and manufactured products can be included in either the Contract or subcontract. However, when a firm both sells material to a Contractor and performs the work of incorporating the materials into the Project, these two phases shall be considered in combination and as constituting a single subcontract.

The Contractor shall as soon as practical after signing the Contract notify the Project Manager in writing, giving the names and qualifications, of all subcontractors proposed to do work on the Project within fifteen (15) business days of notice of award. The City shall have the right to reject subcontractors who are debarred or suspended from doing business with the federal government, State government, or the City of Colorado Springs. The Contractor shall notify the Project Manager of each subcontract he awards, giving:

- (a) Name, address, and telephone number of the subcontractor
- (b) Branch of work covered
- (c) Total price of subcontract
- (d) Date of subcontract

It shall be the responsibility of the Contractor to file with the Project Manager copies of applicable permits and licenses required to do the subcontracted work. Subcontracts or transfer of Contract obligations shall not release the Contractor of liability under the Contract and bonds.

### **104.05 OTHER CONTRACTS**

The City may undertake or award other Contracts for additional work at or near the site of the work under this Contract. The Contractor shall fully cooperate with the other Contractors and with City employees and shall carefully adapt their scheduling and performance of the work to accommodate the additional work, heeding any direction that may be directed by the Project

Manager. The Contractor shall not commit or permit any act, which will interfere with the performance of work by any other contractor.

## **SECTION 105 CONSTRUCTION SITE**

### **105.00 LANDS TO BE USED FOR WORK**

The Contractor shall confine the work activities to the area shown in the construction drawings. The Project Manager will furnish the Contractor with copies of all executed right of way (ROW) and easement documents for the Project. The established work zone shall be marked and secured with orange safety fence. Any additional work area required within adjoining private properties must be acquired by the Contractor by written permission from the property owner. The Contractor shall restore any damage or disruption to other properties utilized in the performance of this Project to an equal or better than pre-construction condition at no cost to the City. The Contractor shall indemnify and hold the City harmless from any claims or losses from damage or disruption of private property.

Contractor shall provide, at its expense and without liability to the City, any additional land and access thereto that may be required for temporary construction facilities or for storage of materials. All such costs will be considered incidental to the work and will not result in additional cost to the City. Contractor personnel shall not unnecessarily enter upon private property without the express written consent of the landowner. The Contractor shall provide the Project Manager with a copy of the written permission. The Contractor shall indemnify and hold the City harmless from any claims or losses related to Contractor trespassing.

### **105.01 STORAGE OF MATERIALS**

The Contractor shall confine its equipment, apparatus, the storage of materials and operations of Contractor's workmen to limits indicated by law, ordinances, permits, or directions of the City and shall not encumber the Project site with materials or equipment not necessary for the Project.

### **105.02 LOADING OF STRUCTURES**

The Contractor shall not load or permit any part of a structure to be loaded with a weight that will endanger the structure's safety. The Contractor shall enforce the Project Manager's instructions regarding signs, advertisements, fires, and smoke.

### **105.03 SANITARY PROVISIONS**

The Contractor shall provide and maintain on the construction site at all times suitable sanitary facilities for use of those employed on this Contract without committing any public nuisance. All toilet facilities shall be subject to the approval of the El Paso County Public Health Department. All portable toilet facilities for this Project shall be kept on City or State right-of-way as directed by the Project Manager.

### **105.04 ACCIDENT PREVENTION**

The Contractor shall be solely responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work. The Contractor shall submit to the City an acceptable, comprehensive Safety Plan for review prior to commencement of the Work. The Contractor shall take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury, or loss to:

- a.) All persons on or about the Site or who may be affected by the Work;

## CITY OF COLORADO SPRINGS

- b.) All Work and materials and equipment to be incorporated therein, whether in storage on or off the Site; and
- c.) Other property at the site or adjacent thereto, including buildings, real property, trees, shrubs, lawns, walks, pavements, roadways, structures, utilities, and underground facilities not designated for removal, relocation, or replacement in the course of the Work.

Notwithstanding the foregoing, the City reserves the right to direct the Contractor to stop work and correct an unsafe condition at any time that any person present at the job site identifies any unsafe condition or action. For this purpose only, any person at the job site is authorized to act on behalf of the City, but such intermittent delay shall not be grounds for an increase in the Contract price or schedule.

Precaution shall be exercised at all times for the protection of persons, including employees, and property. The safety provisions of all Federal, State and Municipal laws and any other codes relating to the public safety, shall be strictly observed, and the Contractor shall, at all times, whether or not so specifically directed by the Project Manager, take the necessary precautions to ensure the protection of the public.

Piling, sheeting and shoring shall be utilized where required to prevent any excessive widening or sloughing of a trench which may be detrimental to human safety, traffic flow, a pipe being placed, trees, or to any existing structure.

Excavated materials shall be placed a safe distance from the sides of the trench. Heavy equipment shall not be used or placed near the sides of a trench unless the trench is adequately braced.

The Contractor shall not load or permit any part of a structure to be loaded with a weight that will endanger the structure's safety.

The Contractor shall designate a qualified and experienced safety representative at the Work site(s) whose duties and responsibilities shall be the prevention of accidents and the maintaining and supervising of safety plans and programs.

### **105.05 PROTECTION OF THE PUBLIC WORKS AND PROPERTY**

The Contractor shall provide and maintain all necessary watchmen, barricades, lights, and warning signs and take all necessary precautions for the protection of the public. The Contractor shall continuously maintain adequate protection of all work from damage, and shall take all reasonable precautions to protect the City's property from injury or loss arising in connection with the Contract. The Contractor shall make good any damage, injury, or loss to their work and to the property of the City resulting from lack of reasonable protective precautions except such as may be due to errors in the Contract Documents, or caused by agents or employees of the City. The Contractor shall check all cautionary signs at least once a day during this Contract.

The Contractor shall continuously maintain adequate protection of all their work from damage and shall protect the City's and adjacent property from injury arising in connection with this Contract.

The Contractor will be responsible for any and all damage to property, public or private, that may be caused by its operations in the performance of this Contract, and the Contractor shall defend any suit that may be brought against itself or the City on account of damage inflicted by its operations, and shall pay any judgments awarded to cover such damage and shall indemnify the City for any losses arising out of such damage or related claims.

The Contractor shall be responsible for the restoration of all existing surface or subsurface improvements damaged as a result of construction at no additional cost to the City.

#### **105.06 PUBLIC ROADS**

The Contractor in executing the work on this Project shall not unnecessarily impede or interfere with traffic on public highways or streets. Detours, including surfacing, guard rails, temporary bridges and culverts, as may be shown on the drawings, or ordered by the Project Manager to accommodate the general public, residents adjacent to the improvements, and the United States mail shall be provided and maintained by the Contractor in a good workmanlike manner. Any call out of City Barricade Crews shall be charged to and paid for by the Contractor.

All work done within the public right-of-way and/or easements requires a Traffic Control Plan approved by the City Traffic Engineering Division.

The Contractor shall provide and maintain in place all barricades, warning signs, lights and other safety devices required to protect the work, divert traffic, and warn pedestrians of open excavation, unfilled trenches, and other areas or conditions which might be hazardous or dangerous. Detour routings must first be submitted to the City Traffic Engineer for review and approval and shall be signed for the entire route of the detour as required to return the traffic to their street or origination. Detours shall be maintained throughout the period of construction in such a manner as to provide the least amount of disruption to normal traffic flow.

All signing and barricading shall conform to the latest editions of the following:

- (a) Manual of Uniform Traffic Control Devices for Street and Highways (MUTCD)
- (b) City of Colorado Springs Traffic Signage and Markings Manual
- (c) City of Colorado Springs Construction Traffic Control Manual

The City Traffic Engineer may require flag persons or off-duty police officers for traffic direction.

#### **105.07 PROTECTION OF EXISTING CURBS, GUTTERS AND DRIVEWAYS**

The Contractor shall exercise care in protecting existing curbs, gutters and driveways. Curbs, gutters and driveways damaged by the Contractor's operations shall be removed and replaced by the Contractor at Contractor's expense.

#### **105.08 PROTECTING AND REMOVING PLANTINGS**

The Contractor shall protect all existing trees, shrubs and other plantings from above ground and root structure damage during the construction activities. Plantings which are considered to be slightly damaged shall be properly pruned and sealed according to accepted nursery practices. Contractor shall be liable for the costs of any unnecessary damage to plants or trees as determined by the Project Manager. Where plantings are in conflict with new work, as determined by the City Forester (plantings in the public right-of-way) or by the inspector or owner (plantings on private property), the Contractor shall at his expense remove the planting. The Contractor shall coordinate with the City Forester prior to working in the vicinity of plantings in the public right of way.

In all cases, the proper planting season shall be observed to assure proper establishment and growth of the plantings.

Tree branches shall be trimmed back to the trunk, all around, to a minimum height of 8' above the adjacent walkway. Work shall be done only by a licensed Tree Service as provided in City Code Chapter 2, Article 3, Part 3.

#### **105.09 PUBLIC CONVENIENCE AND SAFETY**

The Contractor shall make every effort to minimize the inconvenience to property owners and to the traveling and pedestrian public, and shall conduct the Work to minimize obstruction to traffic and inconvenience to property owners affected by the Work.

The Contractor shall notify and coordinate the closing and construction of the driveways, curb, gutter and sidewalks with the Project Manager and the adjoining property owners in advance of Work in writing. The Contractor shall provide 72 hours written notice in advance of any construction that may affect access, parking and/or existing structures, including fences adjacent to that property.

Suitable access and parking will be maintained at all times. Access may be limited to half the existing driveway width for limited periods during concrete driveway and street construction. An additional verbal notice shall be provided to each business or property owner 30 minutes prior to the actual access drive closure.

Relocating of fences and structures shall be coordinated with property owners and shall include miscellaneous items including, but not limited to, utility services, street signs and mailboxes, sod replacement, sprinkler system modifications, control boxes, railroad tie walls, etc. If no such items are specifically included in the Contract, these items will be considered incidental to the work and are to be included in the unit prices. The Contractor shall coordinate the salvaging of any materials suitable for re-use with the City Inspector and, if on private property, with the respective property owners.

Any restrictions on street parking or traffic movement shall be coordinated with the City Traffic Engineer.

#### **105.10 FAILURE TO MAINTAIN SAFE SITE**

If the City becomes aware of failure to comply with applicable safety regulations, the Project Manager may inform the Contractor who shall take immediate steps to remedy the noncompliance. The Project Manager shall give written notification to the Contractor directing it to correct the unsafe acts or conditions. If the Contractor fails to comply with such a notification, the Project Manager may issue a Stop Work order in accordance with this Contract, and work shall only be resumed after adequate corrective actions have been taken to correct the safety deficiencies the Contractor has been notified of. Stoppage of work because of noncompliance with prescribed accident precaution measures shall not be considered a changed condition or changes in work, nor reason for extension of completion time.

In case of injury to persons or property by reason of failure to erect and to maintain necessary barricades, safeguards, and signals, or by reason of any act or omission of the Contractor, or Contractor's subcontractors, agents, or employees, during the performance of this Contract, the City may withhold payments due the Contractor so long as shall be reasonably necessary to indemnify the City on account of any such injuries, but the City's payment or failure to pay any sum shall not be considered a waiver of its right to indemnity under the this Contract.

#### **105.11 EROSION AND DRAINAGE CONTROL**

Contractor shall provide for the drainage of stormwater and such water as may be applied or discharged on the site in performance of the work per the latest revision of the City of Colorado

Springs Drainage Criteria Manual, Volume II. Drainage facilities shall be adequate to prevent damage to the work, the site, and adjacent property.

The Contractor shall prevent the pollution of drains and watercourses by sanitary waste, sediment, debris or other substances resulting from this work. Contractor shall be required to clean up and isolate such materials on a continuing basis to prevent risk of washing into such drainage ways.

Should the affected areas of the Project exceed one acre, a Stormwater Discharge Permit shall be required. Affected area includes excavations, material stockpiles and areas where equipment and vehicles disturb the ground. An exact definition of the affected area should be obtained from the Colorado Department of Public Health and Environment (CDPHE).

## **105.12 POLLUTION**

The Contractor shall at all times ensure compliance with applicable Federal, State, and Municipal air, water, and noise pollution laws and ordinances. The Contractor shall at all times have the proper sprinkling equipment available and shall apply water in the amount determined by each site condition or as directed by the Project Manager. The Contractor shall obtain all necessary permits at Contractor's expense, which may include, but not be limited to, El Paso County or a State Air Emission permit, State of Colorado Construction Activity permit, State of Colorado Dewatering permit and Section 404 Corp of Engineers permit, unless otherwise specified in the RFP.

## **105.13 TEMPORARY CONSTRUCTION**

All temporary facilities, including the Contractor's field office which it may maintain at the site, and additional offices erected by subcontractors, shall be neatly constructed and arranged on the site in an orderly manner. The Contractor shall prepare and submit to the Project Manager, for approval prior to starting work, a construction plan layout, showing arrangement of storage areas, temporary buildings, equipment, and work areas. The Contractor shall provide suitable weather-tight storage sheds of capacity required to contain all materials which might be damaged by storage in the open. The Contractor shall at all times keep copies of all Contract Documents readily accessible at its office at the site.

## **105.14 TEMPORARY WATER SUPPLY**

The Contractor shall provide, at Contractor's own expense, temporary water connections and water supply necessary for the prosecution of the work and permit all contractors on the work to use this supply at a reasonable prorated charge, or by sub-metering. The Contractor shall pay for all water consumed in the work, and shall arrange with Colorado Springs Utilities for temporary connections and payment of service charges. Upon completion of the Contract work, all temporary waterlines shall be removed. The City will devise a method and plan to monitor and enforce the proper use of temporary water. The City will inspect for compliance.

## **105.15 TEMPORARY ELECTRICITY**

The Contractor shall arrange with the Colorado Springs Utilities for temporary electricity necessary for the prosecution of the work. The Contractor shall pay for all electric current consumed, and shall permit all contractors on the work to use this supply at a reasonable prorated charge, or by sub-metering.

## **105.16 TEMPORARY HEAT**

The Contractor shall provide adequate, temporary heat required during construction. Until the building or work area is enclosed, heavy tarpaulin shall be used to enclose any space requiring heating or protection from weather during construction operations. After the heating plant is in operating condition and the building is enclosed, heat may be provided from the permanent heating plant if such is approved by the Project Manager. In such case, the Contractor shall arrange to operate the plant, connect permanent or temporary radiation or unit heaters, and so maintain the plant during operation that it will be turned over to the City undamaged at the completion of the work. The Contractor shall provide all fuel required. In no case shall salamander heating be used in finished or plastered surfaces; instead, gas-steam radiators, unit heaters, or other suitable and approved means shall be used if the permanent heating plant is not available. This applies only to structures. It does not apply to road improvements or other outdoor improvements.

#### **105.17 TEMPORARY ENCLOSURES**

The Contractor shall provide and maintain temporary enclosures for the work as may be required to permit continuation of interior work during inclement weather, if wall and roof construction has progressed sufficiently to make interior work possible. This applies only to structures. It does not apply to road improvements or other outdoor improvements.

#### **105.18 CLEAN-UP**

The Contractor shall at all times keep the work area including storage and staging areas, free from accumulations of waste materials. The Contractor is also responsible for any costs associated with cleanup of debris from the work site or storage areas that may inadvertently be scattered outside the area by weather or vandalism. Upon completion of the work, the Contractor shall leave the work area in a clean neat and orderly condition satisfactory to the Project Manager.

### **SECTION 106 ROYALTIES, PATENT INFRINGEMENTS, SPECIAL LICENSES AND PERMITS**

#### **106.00 ROYALTIES AND PATENTS**

The Contractor shall pay all applicable royalties and license fees. The Contractor shall defend all suits or claims for infringement of any patent rights and save the City harmless from loss on account thereof except that the City may be responsible for any such loss when a particular process, design, or the product of a particular manufacturer or manufacturers is specified, unless the City has notified the Contractor prior to the signing of the Contract that the particular process, design, or product is patented or is believed to be patented.

### **SECTION 107 WORK PROVISIONS AND RULES**

#### **107.00 COMMENCEMENT AND COMPLETION OF WORK**

- (a) Preconstruction Conference. After issuance of Notice to Proceed, or as otherwise established by the City, a preconstruction conference ("Preconstruction Conference") shall be held for review of the construction schedule, Contractor's written list of subcontractors and suppliers, written list of all required permits, project contracts, utility support plan, water control plan, Traffic Control Supervisor name and telephone number, gradations, test results, certifications, review procedures for handling shop drawings and other submittals, processing applications for payment, and other pertinent items.

CITY OF COLORADO SPRINGS

- (b) At the Preconstruction Conference, the Contractor shall furnish the Project Manager a written list of all permits required for the proper completion of the Contract. The list shall clearly identify the type of permit or permits that must be obtained before work on any particular phase or phases of work can be started.
- (c) The Contractor shall commence work within ten (10) Calendar Days of the date specified on the Notice to Proceed and complete the Contract within the number of Calendar Days or by the date specified in the proposal form. Unless otherwise noted in the Contract, the number of days are Calendar Days.
- (d) The dates fixed for commencement and completion of the work may be extended by the Project Manager. All requests for extension of time by the Contractor shall be made in writing to the Project Manager and shall set forth the reasons for such requests. The Project Manager may fix the period of extension, if any. In addition, the Project Manager may grant a period of extension upon an execution of a Change Order. Any Project Manager's decision on extensions of time shall be binding upon the parties hereto. Requests for extension of time received twenty (20) or more days after the occurrence of the delay will not be honored. No requests for extension of time shall be honored if submitted after the completion date.
- (e) If satisfactory execution and completion of the Contract shall require work or materials in greater amounts or quantities other than those set forth in the Contract, then the Contract time may be adjusted at the time of the execution of the Change Order. No allowance will be made for delays or suspension of the prosecution of the work due to the fault of the Contractor.

**107.01 FAILURE TO COMPLETE WORK ON TIME, LIQUIDATED DAMAGES**

If the Contractor fails to fully perform and complete the work in conformity to the provisions and conditions of the Contract within the specified time limit set forth in the Contract, including any extensions granted hereto, the Contractor may be subject to a stop work order, as provided in this Contract. In addition, the Contractor shall pay to the City for each Calendar Day of delay until such time the Contract is complete, liquidated damages at the applicable daily rate below. The amounts shown are considered to be liquidated damages to reimburse the City for the additional cost of construction engineering and Contract administration services and in no case are considered a penalty.

Original Contract Amount	Amount of Liquidated Damages Per Day
Less than \$50,000	\$300.00
\$50,000 to \$100,000	\$500.00
\$100,000 to \$500,000	\$700.00
\$500,000 to \$1,000,000	\$900.00
Over \$1,000,000	\$1500.00

**107.02 WORK IN BAD WEATHER**

No construction work shall be done during stormy, freezing, or inclement weather, except such as can be done satisfactorily, and in a manner to secure first class construction throughout, and then only subject to permission of the Project Manager.

The granting of a time extension for inclement weather does not imply or guarantee that additional compensation for incidental and appurtenant work caused by such weather will be approved or authorized by the Project Manager. Weather delays that can be reasonably anticipated shall not result in increased cost to the City. The Project Manager will be the sole judge as to the reasonableness of delays for inclement weather.

### **107.03 EXCUSABLE DELAYS**

The Contractor's right to proceed will not be terminated, and the Contractor will not be charged with damages, for delays in completing the work that arise from unforeseeable causes beyond the control and without the fault or negligence of the Contractor. Examples of such causes include:

- (a) Acts of God or of the public enemy,
- (b) Acts of the government in either its sovereign or Contractual capacity,
- (c) Acts of another contractor in the performance of a contract with the government,
- (d) Fires,
- (e) Floods,
- (f) Epidemics,
- (g) Quarantine restrictions,
- (h) Strikes of employees other than Contractor's employees,
- (i) Freight Embargos,
- (j) Unusually severe weather, or
- (k) Delays of subcontractors or suppliers at any tier arising from unforeseeable causes beyond the control and without the fault or negligence of both the Contractor and the subcontractors or suppliers.

### **107.04 COMPENSATION FOR COMPENSABLE DELAYS**

If the Project Manager determines that a delay is compensable in accordance with the Contract, monetary compensation will be determined in accordance with this subsection.

- (a) These categories represent the only costs that are recoverable by the Contractor. All other costs or categories of costs are not recoverable:
  - 1. Actual, reasonable wages and benefits, including FICA, paid for additional non-salaried labor;
  - 2. Reasonable and actual costs for additional bond, insurance and tax;
  - 3. Increased, reasonable, and actual costs for materials;
  - 4. Reasonable equipment costs calculated in accordance with the current edition of the Rental Rate Blue Book of Rental Rates for Construction Equipment for Contractor-owned equipment and based on invoice costs for rented equipment;

## CITY OF COLORADO SPRINGS

5. Reasonable and actual costs of extended job site overhead;
  6. Reasonable subcontractor's claims (the same level of detail as specified herein is required for all subcontractors' claims)
  7. An additional 10 percent will be added to the total of items (1), (2), (3), (4), (5), and (6) as compensation for items for which no specific allowance is provided, including profit, overhead, and general and administrative expenses.
- (b) In adjustment for costs as allowed above, the City will have no liability for the following items of damages or expense:
1. Profit in excess of that provided in (a) above;
  2. Loss of profit;
  3. Additional cost of labor inefficiencies in excess of that provided in (a) above;
  4. Home office or other overhead or general and administrative expenses in excess of that provided in (a) above;
  5. Consequential damages, including but not limited to loss of bonding capacity, loss of bidding opportunities, and insolvency;
  6. Indirect costs or expenses of any nature in excess of that provided in (a) above;
  7. Attorney's fees, claim preparation fees, and expert fees.

All costs claimed must be documented and accompanied by a written certification from the Contractor.

### **107.05 EMERGENCY WORK**

In an emergency affecting the safety of life or of the work or of adjoining property, the Contractor is, without special instructions or authorization from the Project Manager, hereby permitted to act at Contractor's discretion to prevent such threatening loss or injury. Contractor shall also act, without appeal, if so authorized or instructed by the Project Manager. Any reasonable compensation claimed by the Contractor on account of emergency work shall be determined by mutual agreement or in accordance with the Changes provision of this Contract.

### **107.06 VALUE ENGINEERING CHANGE PROPOSALS BY THE CONTRACTOR**

The Contractor is encouraged to develop and offer proposals for improved construction techniques, alternative materials and other innovations. Proposals must provide a project comparable to the City's original design either at lower cost, with improved quality, or both. If a Value Engineering Change Proposal (VECP) Proposals shall be submitted only after contract award. If a VECP is rejected, the work shall be completed in accordance with the Contract at the Contract price. The Contractor shall have no claim against the City for compensable or noncompensable delay to the Contract based on the failure to respond to a VECP.

The Contractor may submit either a full VECP or a preliminary Conceptual VECP, followed by a full proposal. The City Engineer will provide timely review of all VECPs and advise the Contractor whether the VECP is complete or incomplete. When the VECP is complete, the Project Manager will advise the Contractor of either the approval of the VECP or the reasons for rejection of the VECP.

CITY OF COLORADO SPRINGS

Cost savings generated to the Contract as a result of VECPs offered by the Contractor and accepted by the Project Manager shall be shared equally between the Contractor and the City.

If the Project Manager determines that the time for response indicated in the submittal under item (c)5 below is insufficient for review, the Contractor will be promptly notified. Based on the additional time needed by the Project Manager for review and the effect on the Contractor's schedule caused by the added time, the Project Manager will evaluate the need for a non-compensable time adjustment to the Contract.

(a) VECPs that will be considered are those that would produce savings to the City or provide improved Project quality without impairing essential functions and characteristics of the Project. Essential functions include but are not limited to: service life, economy of operation, ease of maintenance, desired appearance, safety, and impacts to the traveling public or to the environment during and after construction.

(b) *Submittal of Conceptual Proposal.* For VECPs that require a significant amount of design or other development resources, the Contractor may submit an abbreviated conceptual proposal for preliminary evaluation. The Project Manager will evaluate the information provided and advise the Contractor if any conditions or parameters of the conceptual proposal are found to be grounds for rejection. Preliminary review of a conceptual proposal reduces the Contractor's risk of subsequent rejection but does not commit the City to approval of the full VECP. The following information shall be submitted for each conceptual proposal.

1. A statement that the proposal is submitted as a conceptual VECP.
2. A general description of the difference between the existing Contract and the proposed change, and the advantages and disadvantages of each, including effects on cost, service life, economy of operation, ease of maintenance, desired appearance, safety, and impacts to the traveling public or to the environment during and after construction.
3. A set of conceptual plans and a description of proposed changes to the Contract specifications.
4. An estimate of the anticipated cost savings or increase.
5. A statement specifying:
  - a. when a response to the conceptual proposal from the City is required to avoid delays to the existing contract prosecution,
  - b. the amount of time necessary to develop the full Proposal,
  - c. the date by which a Change Order must be executed  
to obtain maximum benefit from the VECP, and
  - d. the VECP's impact on time for completing the Contract.

(c) *Submittal of Full Value Engineering Change Proposal.* The following materials and information shall be submitted with each VECP.

1. A statement that the proposal is submitted as a VECP.
2. A description of the difference between the existing Contract and the proposed change, and the advantages and disadvantages of each, including effects on service life,

CITY OF COLORADO SPRINGS

economy of operation, ease of maintenance, desired appearance, safety, and impacts to the traveling public or to the environment during and after construction.

3. A complete set of plans and specifications showing the proposed revisions relative to the original Contract. This portion of the submittal shall include design notes and construction details. The proposed plans and specifications shall be signed and sealed by the Contractor's engineer.
4. A complete analysis indicating the final estimated costs and quantities to be replaced by the VECP compared to the new costs and quantities generated by the VECP. All costs and proposed unit prices shall be documented by the Contractor.
5. A statement specifying the date by which a Change Order must be executed to obtain the maximum cost reduction during the remainder of the Contract.
6. A statement detailing the effect the VECP will have on the time for completing the Contract.
7. A description of any previous use or testing of the proposed changes and the conditions and results. If the VECP was previously submitted on another City project, the VECP shall indicate the date, Contract number, and the action taken by the City.
8. An estimate of any effects the VECP will have on other costs to the City.
9. A statement of life cycle costs, when appropriate. Life cycle costs will not be considered as part of cost savings but shall be calculated for additional support of the VECP. A discount rate of four percent shall be used for life cycle calculations.
10. A statement specifying when a response from the City is required to avoid delays to the prosecution of the Contract.

(d) *Evaluation.* VECPs will be evaluated in accordance with the following:

1. The Project Manager will determine if a VECP qualifies for consideration and evaluation. The Project Manager may reject any VECP that requires excessive time or costs for review, evaluation, or investigations. The Project Manager may reject proposals that are not consistent with the City's design policies and criteria for the Project.
2. VECPs, whether or not approved by the City, apply only to this Contract and become the property of the City. VECPs shall contain no restrictions imposed by the Contractor on their use or disclosure. The City has the right to use, duplicate and disclose in whole or in part any data necessary for the utilization of the Proposal. The City retains the right to utilize any accepted VECP or part thereof on other projects without obligation to the Contractor. This provision is subject to rights provided by law with respect to patented materials or processes.
3. If the City is able to demonstrate that it is already considering certain revisions to the Contract, prior to receipt of the VECP, or has approved certain changes in the Contract for general use that are subsequently proposed in a VECP, the Project Manager will reject the VECP and may proceed to implement these changes without obligation to the Contractor.
4. The Contractor shall have no claim against the City for additional costs or delays resulting from the rejection or untimely acceptance of a VECP. These costs include but

## CITY OF COLORADO SPRINGS

are not limited to: development costs, loss of anticipated profits, increased material or labor costs, or untimely response.

5. VECP will be rejected if equivalent options are already provided in the Contract.
  6. VECP that only reduce or eliminate Contract pay items will be rejected.
  7. The savings generated by the VECP must be sufficient to warrant a review and processing, as determined by the Project Manager.
  8. A VECP changing the type or thickness of the pavement structure or changing the design of a bridge will be rejected.
  9. Additional information needed to evaluate VECPs shall be provided in a timely manner. Untimely submittal of additional information will result in rejection of the VECP. Where design changes are proposed, the additional information shall include results of field investigations and surveys, design and computations, and changed plan sheets required to develop the design changes.
- (e) *Payment.* If the VECP is accepted, the changes and payment will be authorized by a Change Order. Reimbursement will be made as follows:
1. The changes will be incorporated into the Contract by changes in quantities of unit items, new agreed unit price items, or both, as appropriate, under the Contract.
  2. The Price of the contract will be revised to reflect the changes in the VECP. The City will pay the Contractor 50 percent of the savings to the City upon completion of the Project. The savings to the City shall be the difference between the cost of the revised work and the cost of the related construction required by the original Contract computed at Contract prices.
  3. Costs incurred by the Contractor for development, design, and implementation of the VECPs will not be reimbursed.
  4. When work performed under an approved VECP is modified to fit field or other conditions, the maximum amount paid for the work will be limited to that which would have been paid if the work had been performed under the original Contract provisions. The rejection or limitation of reimbursement shall not constitute the basis of any claim against the City for delay or for other costs except as allowed under the original Contract.

### **107.07 AUTHORITY OF THE PROJECT MANAGER**

The Project Manager will decide all questions regarding the quality and acceptability of materials furnished, work performed, and the rate of progress of the work, all interpretation of the plans and specifications, and the acceptable fulfillment of the Contract. The Project Manager will perform technical inspection of the work and shall have authority to reject all work and materials which do not conform to the Contract.

The Project Manager has authority to stop the work whenever such stoppage may be necessary to insure the proper execution of the Contract or for the convenience of the City. The Project Manager may order the Contractor, by giving ten (10) days written notice, to suspend, delay, or interrupt all or any portion of the work required by the Contract for a period of up to (10) ten Calendar Days at no additional cost to the City. The Project Manager may immediately stop the work when it is determined that the public's safety and welfare is in jeopardy.

The Project Manager will, within a reasonable time after their presentation to the Project Manager, make decisions in writing on all claims submitted to the City by the Contractor and on all other matters relating to the execution and progress of the work or the interpretation of the Contract Documents. The Project Manager's decisions shall be final.

#### **107.08 DUTIES OF THE INSPECTOR**

Inspectors employed by the City are authorized to inspect all work done and materials furnished. Any such inspection may extend to all or any part of the work and to the preparation, fabrication or manufacture of the materials to be used. An inspector is not authorized to alter or waive the provisions of the Contract. An inspector is not authorized to issue instructions contrary to the provisions of the Contract or to act as foreman for the Contractor.

#### **107.09 CONSTRUCTION OBSERVATION AND INSPECTION**

The Project Manager shall at all times have access to the work, and the Contractor shall provide proper equipment, materials and labor as required for such access and inspection.

All equipment, material, and articles incorporated into the work covered by this Contract shall be new and of the most suitable grade for the purpose intended, unless otherwise specifically provided in this Contract. The Project Manager shall have the right to reject materials and workmanship, which are defective, or require their correction. Rejected workmanship shall be satisfactorily corrected and rejected materials shall be removed from the premises and replaced without charge to the City. If the Contractor does not correct such rejected work and remove rejected materials within a reasonable time fixed by written notice, the City may remove them and charge the expense to the Contractor.

Should it be considered necessary or advisable by the Project Manager at any time before final acceptance of the entire work to make an examination of work already completed, by removing or tearing out same, the Contractor shall on request promptly furnish necessary facilities, labor and materials. If such work is found to be defective in any material respect due to fault of the Contractor or his subcontractors, he shall defray all the expenses of such examination and of satisfactory reconstruction. If, however, such work is found to meet the requirements of the Contract, the actual, reasonable cost of labor and material necessarily involved in the examination and replacement, plus ten (10) percent, will be allowed the Contractor.

All materials to be incorporated in the work, all labor performed, all tools, appliances, and methods used shall be subject to the inspection and approval or rejection of the Project Manager.

If the Project Manager points out to the Contractor, Contractor's foreman, or agent any neglect or disregard of the Contract provisions, such neglect or disregard shall be remedied and further defective work be discontinued immediately.

The Contractor shall execute the work only in the presence of the Project Manager or authorized representative, unless provision has been made for the work to proceed without complete engineering supervision or inspection. The presence of the Project Manager or authorized representative shall in no way relieve the Contractor of any responsibility under this Contract.

The observation of the work by the Project Manager is intended to aid the Contractor in applying labor, materials, and workmanship in compliance with the Contract provisions. Such observation, however, shall not relieve the Contractor from any of Contractor's Contract obligations.

## **107.10 CONTRACTOR COOPERATION**

All work under this Contract shall be performed in a skillful and professional manner. The Project Manager shall have the authority to order the Contractor to remove from the work site any employee the Project Manager deems incompetent, careless, or otherwise objectionable to the general public or the City by notify the Contractor of such order in writing.

- (a) Workmen, Methods and Equipment: Permission from the Project Manager to use any particular methods, equipment or appliances shall not be so construed as to relieve the Contractor from furnishing other equipment or appliances or adopting other methods when those in use prove unsatisfactory to the Project Manager, or as to bind the Project Manager to accept work which does not comply with the Contract.

## **107.11 CONTRACTOR'S RESPONSIBILITY FOR WORK**

Until the work is accepted by the Project Manager as evidenced by the issuance of the Certificate of Completion, the Contractor shall have the charge and care thereof and shall take every necessary precaution against injury or damage to any part thereof by action of the elements or from any other cause, whether arising from the execution or from the non-execution of the work. The Contractor shall rebuild, repair, restore, and make good all injuries or damages to any portion of the work occasioned by any of the above causes before its completion and acceptance and shall bear the expense thereof.

The Contractor shall be responsible for the preservation of all public and private property, trees, fences, monuments, and other property, along and adjacent to the improvements and shall use suitable precautions necessary to prevent damage to pipes, conduits, and other underground structures. When or where any direct or indirect damage or injury is done to public or private property by or on account of any act, omission, neglect or misconduct in the execution of the work, or in consequence of the non-execution thereof on the part of the Contractor, such property will be restored by the Contractor and at Contractor's expense to a condition similar, or equal to that existing before such damage or injury to the satisfaction of the City's Project Manager.

It shall be the responsibility of the Contractor, when moving or operating equipment, to make all arrangements for temporary crossings of telephone, transmission, pipe lines, railroad tracks, and irrigation ditches. This work shall not be paid for as a separate item but shall be considered as incidental to the project.

## **107.12 PROTECTION OF UTILITIES**

The Contractor's attention is directed to the fact that utilities may encroach on the construction of this Project, and also to the importance of protecting all public/private utilities encountered on this project. These may include telecommunications, cablevision, traffic signal lines, power lines, water lines, sewer lines, gas lines, railroad tracks, and other overhead and underground utilities.

The City does not warrant any survey work or location of utilities or other underground apparatuses whether performed by the City, its agent, or an independent contractor. Contractor understands and agrees any survey or location work performed by the City, its agent, or other independent contractor is provided for guidance purposes only, so as to show the approximate location of underground utilities or apparatuses. Contractor understands the existence or exact location of underground utilities or apparatuses may not be known to the City or the design engineer of record. Contractor, therefore, agrees that it shall verify the existence and location of any underground utilities or apparatus along the route of work. Verification shall be done by potholing or using other methods which will detect the exact depth, dimensions, and location of any underground utilities or apparatus.

## CITY OF COLORADO SPRINGS

Contractor shall be liable for any damages, loss, or claims of whatsoever kind caused by its failure to pothole or use other methods of identifying the exact depth, dimensions, and location of any underground utilities or apparatus. Contractor agrees that any claim of any kind whatsoever, damages, loss, lawsuit, demand, or request for equitable adjustment ("Claims"), shall be waived and the City shall be forever released and discharged from such Claims if Contractor fails to comply with its obligations under this section. Contractor agrees that if it fails to maintain all records or other evidence establishing that it potholed or otherwise determined the exact location, depth, and dimensions of all underground utilities and apparatuses, then it shall not be permitted to make any Claim arising from or related to the location of underground utilities or apparatus.

The size and location of all existing utilities as known to the Project Manager have been noted on the plans for the information and guidance of the Contractor. The Contractor shall be responsible for the location and protection of all utilities located within his working area regardless of whether or not their existence or location is shown or noted on the drawings.

It is the Contractor's responsibility to complete required work and to schedule inspections during normal working hours. The Contractor is responsible for contacting each affected utility for their inspectors' working hours. The Contractor is responsible to request an inspection two (2) working days in advance of the inspection. In the case of an overtime inspection, the request must be in writing. All overtime costs for inspection by Colorado Springs Utilities, or other utilities personnel, shall be the Contractor's expense. The City will not entertain any requests for time extensions for delays caused by the Contractor's failure to properly notify the affected utility of a required inspection or the Contractor's failure to complete the required work by the time of the scheduled inspection.

Any information concerning underground utilities shown on the drawings is intended to be merely an aid to the Contractor. The accuracy of information with respect to underground utilities is not guaranteed. The Contractor shall make their own investigation, including exploratory excavations, to determine the locations and type of existing mains or service laterals or appurtenances when their presence can be inferred from the presence of other visible facilities, such as building, manholes, inlets, meters and junction boxes, on or adjacent to the site of the work. If the Contractor discovers utility facilities not identified in the plans or specifications or in a position different from that shown in the plans and specifications, the Contractor shall immediately notify, verbally and in writing, the Project Manager and Owner of the utility facility.

Before any excavation is begun in the vicinity of water lines, railroad tracks, or structures, sewer lines, telecommunication conduits or cablevision line, each utility company, including Colorado Springs Utilities (if applicable), department, or company concerned must be notified in advance of such excavation, and such excavation shall not be made until an authorized representative of the utility concerned is at the site.

All utilities encountered must be kept in operation by the Contractor and must be protected and/or repaired at the Contractor's own expense, unless otherwise specified in the Contract documents. The Contractor shall be held liable for all damages to any and all public utilities encountered on the project, which damages are due to the Contractor's operations. Such damages shall include all physical damages to utilities and also all damages due to interruption of service of such utilities, when such damages and interruptions are caused by the Contractor's operations.

Where alterations or moving of utilities is not required to permit construction of the project, the Contractor shall take such measures as the Project Manager may direct to properly protect these utilities throughout his construction operations and shall cooperate at all times with the proper authorities and/or owners in maintaining service of railroads, conduits, pole lines, transmission lines, pipe lines, sewers, etc., affected by this project.

## CITY OF COLORADO SPRINGS

The costs of damages due to the Contractor's operation shall not be allowable under this Contract and shall result in no additional cost to the City. The cost of protecting utilities where alteration or relocation is not required to permit construction of the project shall be considered as included in the original Contract price for the project and shall result in no additional cost to the City.

Should any pipe line, water lines, or gas mains, electrical conduits, sewer pipes, overhead wiring, telecommunication lines, power lines, or any other such utilities, not specifically mentioned and provided for elsewhere as a part of this Contract, have to be moved, repaired, reconditioned, or revised due to the construction, or moved temporarily to permit construction of the project the party or parties owning and operating such utilities shall perform the actual work of moving, repairing, reconditioning, or revising such utilities. Any such work would be added via change order, and the cost of this work will be borne by Colorado Springs Utilities, the utility companies involved, or other means arranged by the City.

### (a) Existing Utilities

1. Existing Gas Lines: As of April 1, 1983, Federal law requires anyone who uncovers a gas line to report it to the gas company and allow it to be inspected by the gas company personnel before it is backfilled. Colorado Springs Utilities or other provider is to be notified prior to any excavation around gas lines. A Colorado Springs Utilities or other applicable provider inspector is to be notified and present on site prior to construction activities around gas lines.
2. Existing Sewer Mains and Services: All relocation, replacement protection shown on the plans or determined necessary by the inspector shall be performed according to the latest Colorado Springs Utilities Wastewater Standard Specifications. Minimum 48 hours' notice must be given to Colorado Springs Utilities prior to any related work.
3. The Contractor shall adjust sanitary sewer manhole rims to an elevation acceptable to Colorado Springs Utilities. The Contractor shall contact Colorado Springs Utilities twenty-four (24) hours prior to manhole rim adjustments.
4. Existing Water Mains and Services: All relocation, replacement or protection shown on the plans or determined necessary by the inspector shall be performed according to the latest Colorado Springs Utilities Water Standard Specifications and the Water Service Standard Specifications. Minimum 48-hour notice must be given to Colorado Springs Utilities prior to any related work. Colorado Springs Utilities reserves the right to schedule any operations at their discretion and to provide for any requirements determined necessary to perform the work. The Contractor shall coordinate with the Colorado Springs Utilities and receive their approval prior to performance of the work.

### (b) Utility Support Systems:

1. If required by the Contract documents, or requested by the Project Manager, the Contractor shall submit shop drawings for the method of temporary support for all existing utilities during construction. The temporary support details for existing utilities shall be submitted for review and approval prior to performance of the work. Shop drawings must bear the seal of a Professional Project Manager registered in the State of Colorado, unless so waived by the City.
2. Regardless of City approved shop drawings, the Contractor shall be responsible for the satisfactory support of the utility system and any damages that may occur to the utility involved.

### (c) Electric Utility Installation:

## CITY OF COLORADO SPRINGS

1. Any electric facilities unless otherwise noted are to be relocated or modified by Colorado Springs Utilities. The Contractor shall coordinate the work with Colorado Springs Utilities and Colorado Springs Utilities Contractor.
2. Light Pole Installation or Relocation:
  - a. The Contractor is responsible for coordinating with Colorado Springs Utilities, removing existing light pole foundations, constructing new light pole foundations, installing new conduits, and installing lighting junction boxes. The Contractor is responsible for coordinating with Colorado Springs Utilities for the de-energizing and removal of existing light poles.
  - b. Colorado Springs Utilities will remove the existing light standards, reset the light standards upon completion of the new foundations, conduit and junction boxes, pulling wire, and beginning operations of the lighting within the project limits. The Contractor is responsible for scheduling and coordination with Colorado Springs Utilities crews for reinstallation and re-energizing completed light poles.
- (d) Gas Utilities: The Contractor is responsible for coordinating with Colorado Springs Utilities for the relocation of existing Gas lines. Colorado Springs Utilities will relocate the existing gas lines as necessary to install project improvements within the project limits. The Contractor is responsible for scheduling and coordination with Colorado Springs Utilities crews.
- (e) Telecommunication Agencies: Any telephone facilities unless otherwise noted are to be relocated or modified by the respective private utility company. The Contractor shall coordinate the work with the respective private utility company.
- (f) Cablevision: The television utilities are to be relocated by the cable provider. The Contractor shall coordinate the work with any affected cable provider.

### **107.13 FEDERAL FUNDS**

If this Contract is a federally assisted construction contract all applicable federal requirements, terms and conditions, provisions and forms shall apply. Additionally, during the performance of this Contract, the Contractor agrees as follows:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, color, religion, sex, sexual orientation, gender identity, or national origin. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment, without regard to their race, color, religion, sex, sexual orientation, gender identity, or national origin. Such action shall include, but not be limited to the following: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided by the contracting officer setting forth the provisions of this nondiscrimination clause
2. The Contractor will, in all solicitations or advancements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, sexual orientation, gender identity, or national origin.

## CITY OF COLORADO SPRINGS

3. The Contractor will not discharge or in any other manner discriminate against any employee or applicant for employment because such employee or applicant has inquired about, discussed, or disclosed the compensation of the employee or applicant or another employee or applicant. This provision shall not apply to instances in which an employee who has access to the compensation information of other employees or applicants as a part of such employee's essential job functions discloses the compensation of such other employees or applicants to individuals who do not otherwise have access to such information, unless such disclosure is in response to a formal complaint or charge, in furtherance of an investigation, proceeding, hearing, or action, including an investigation conducted by the employer, or is consistent with the contractor's legal duty to furnish information.
4. The Contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other Contract or understanding a notice advising the labor union or workers representative of the Contractor's commitments under Section 202 of Executive Order No. 11246 of September 24, 1965, and shall post copies of the notice in conspicuous places available to employees and applicants for employment.
5. The Contractor will comply with all provisions of Executive Order 11246 of September 24, 1965, and of the rules, regulations, and relevant orders of the Secretary of Labor.
6. The Contractor will furnish all information and reports required by Executive Order 11246 of September 24, 1965, and by the rules, regulations and orders of the Secretary of Labor, or pursuant thereto, and will permit access to his books, records, and accounts by the Secretary of Labor, State of Colorado Civil Rights Commission and any other governmental agency entity which may be assisting with the funding under this Contract for purposes of investigation to ascertain compliance with such rules, regulations and orders.
7. In the event of the Contractor's noncompliance with the nondiscrimination clauses of this Contract or with any such rules, regulations, or orders, this Contract may be cancelled, terminated, or suspended in whole or in part, and the Contractor may be declared ineligible for further government Contracts or Federally assisted construction Contracts in accordance with the procedures authorized in Executive Order No. 11246 of September 24, 1965, and such other sanctions may be imposed and remedies invoked as provided in Executive Order No. 11246 of September 24, 1965, or by rule, regulation, or order of the Secretary of Labor, or otherwise provided by law.
8. The Contractor shall include the provisions of Paragraphs (1) through (8) in every subcontract or purchase order unless exempted by rules, regulations, or orders of the Secretary of Labor issued pursuant to Section 204 of Executive Order No. 11246 of September 24, 1965, so that such provisions will be binding upon each subcontractor or vendor. The Contractor will take such action with respect to any subcontract or purchase order as the city, state, or any federal governmental entity may direct as a means of enforcing such provisions, including sanctions for noncompliance. Provided, however, that in the event the Contractor becomes involved in, or is threatened with, litigation with a subcontractor or vendor as a result of such direction, the Contractor may request the city, the state, or the United States to enter into such litigations to protect the interests of such governmental entity.

### **107.14 SUPERINTENDENCE**

The Contractor shall give the work the constant attention necessary to facilitate the progress thereof and shall cooperate with the Project Manager and with other contractors or Colorado

Springs Utilities employees in every way possible. The Contractor shall have at all times, on the work, as Contractor's agent, a competent superintendent capable of reading and thoroughly understanding the Plans and Specifications, and who shall have the necessary authority to receive and promptly execute the instructions and orders from the Project Manager or the Project Manager's authorized representative. Such superintendent shall be furnished irrespective of the amount of work sublet. The Contractor shall supply the Project Manager with a list of phone numbers at which the Contractor and its superintendent and foreman can be reached at any time. The assigned superintendent must adhere to the cooperation requirements specified in this Contract and is subject to removal if so ordered in writing by the Project Manager.

#### **107.15 PREPARATION**

All vegetation, stumps, and debris and other objectionable objects shall be removed from the area staked out by the Project Manager, and where necessary from the area immediately adjacent thereto. Such debris shall be hauled from the site of the construction and wasted as directed by the Project Manager.

#### **107.16 STAKING WORK**

The Project Manager may provide reference points (horizontal and vertical control) only, unless otherwise noted in the proposal and project specifications. The Contractor shall engage the services of a licensed surveyor or surveying firm (hereinafter referred to as the Surveyor) to be approved by the Project Manager. The Surveyor shall perform all detailed construction layout and staking including the staking of all storm sewer, street improvements, and utility relocations in accordance with the plans and specifications. The Contractor shall be responsible for the correctness and accuracy of the detailed layout of finished structures.

Any instrument man or survey assistant employed on the work by the Contractor or his subcontractors, who are judged by the Project Manager to be incompetent, shall be removed from the work and replaced by a competent individual.

#### **107.17 DEVIATION ALLOWED**

Finished surfaces in all cases shall conform to lines, grades, cross sections and dimensions shown on the approved drawings or described in the Specifications. Deviations from the approved drawings and working drawings as may be required by the expedencies of construction, in all cases, must be determined by the Project Manager and authorized in writing. If the Project Manager deems it inexpedient to correct work injured or done in an unauthorized manner, an equitable deduction from the Contract price of the work done shall be made by the Project Manager subject to approval of the City Procurement Services Manager.

#### **107.18 RIGHT-OF-WAY**

The City's right-of-way will in general be adequate for construction purposes. Nothing marked on the drawings shall be interpreted as giving the Contractor exclusive occupancy of the territory provided by the City. The City and its employees for any purpose, and other contractors of the City, for any purpose required by their respective contracts, may enter upon or occupy any portion of the land furnished by the City. When the territory of one contract is a necessary or convenient means of access for the execution of another contract, such privileges of access or any other reasonable privilege shall be granted by the Contractor to the extent, amount, in the manner and at times necessary. No such joint occupancy or use of the territory shall be made as the basis of any claim for delay or damages.

## **107.19 SHOP DRAWINGS AND SUBMITTALS**

The Contractor shall submit to the Project Manager all shop drawings and submittals required for the work, including those pertaining to structural and reinforcing steel within fifteen (15) Calendar Days from the date of the Notice of Award. The Contractor shall make any corrections in the drawings required by the Project Manager and resubmit the same without delay.

Three final copies of all shop drawings (if applicable), submittals (if applicable) and schedules shall be submitted to the Project Manager, who after checking will retain two copies and return one copy to the Contractor. The Project Manager's approval of shop drawings of equipment and material shall extend only to determining the conformity of such equipment and materials with the general features of the design drawings prepared by the Project Manager. It shall be the responsibility of the Contractor to determine the correctness of all dimensions and minor details of such equipment and materials so that when incorporated in the work, correct operations will result.

## **107.20 RECORD DRAWINGS**

The Contractor shall maintain an up-to-date set of Contract drawings and Contract records, legibly marked; depicting all constructed improvements at the site or as otherwise specified and shall submit a complete set labeled "Project Record" to the Project Manager upon completion of the Project.

### **(a) Drawings:**

1. Depths of various elements of foundation in relation to finish floor datum.
2. Horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements and Project survey control.
3. Location of internal utilities and appurtenances concealed in the construction, referenced to permanent surface improvements and project survey control.
4. Field changes of dimensions and detail.
5. Changes made by Change Order.
6. Details not on original Contract drawings.

### **(b) Specifications and Addenda:**

1. Manufacturer, trade name, catalog number, and supplier of each product and item of equipment actually installed.
2. Changes made by Change Order.

## **107.21 MATERIALS**

Unless otherwise stipulated in the Specifications, all workmanship, equipment, materials, and articles incorporated in the work covered by this Contract are to be new and of the best grade of their respective kinds for the purpose. The Contractor shall furnish to the Project Manager for the Project Manager's approval, the name of the manufacturer of machinery, mechanical and other equipment, which he contemplates installing, together with their performance capacities and other pertinent information including but not limited to instruction manuals pertaining to the use and operation of such machinery, mechanical and other equipment.

When required by the Specifications, or when called for by the Project Manager, the Contractor shall furnish for approval full information concerning the materials or articles which he contemplates incorporating in the work. Samples of materials shall be submitted for approval when so directed. Machinery, equipment, materials, and articles installed or used without such approval shall be at the risk of subsequent rejection.

#### **107.22 MATERIAL INSPECTION AT PLANT**

If the Project Manager inspects the materials at the source, the following conditions shall be met:

- (a) The Project Manager shall have the cooperation and assistance of the Contractor and the materials producer.
- (b) The Project Manager shall have full entry to all parts of the plant necessary for the manufacture or production of the materials being furnished.
- (c) Adequate safety measures shall be provided and maintained.

The City reserves the right to retest all materials which have been previously tested or inspected. The retesting may be prior to or after incorporation of the materials into the work. Those materials inspected and tested after delivery on the Project or after incorporation into the work that do not meet the requirements of the Contract will be rejected and replaced at no additional cost to the City.

#### **107.23 HANDLING MATERIALS**

All materials shall be handled so their quality and fitness for the work is preserved. Aggregates shall be transported to the work in vehicles constructed to prevent loss or segregation of materials.

#### **107.24 CITY FURNISHED MATERIALS**

Material furnished by the City will be made available to the Contractor at the points specified in the Contract.

The cost of handling and placing materials after they are made available to the Contractor shall be considered as included in the Contract price for the item, and shall result in no additional cost to the City.

The Contractor will be held responsible for all material received until it is incorporated into the work and accepted.

Demurrage charges resulting from the Contractor's failure to accept the material at the designated time and point of delivery will be deducted from monies due the Contractor.

#### **107.25 BUY AMERICA REQUIREMENTS**

All manufacturing processes, including the application of a coating, for all steel and iron products permanently incorporated in the work shall have occurred in the United States of America. All manufacturing processes are defined as "processes required to change the raw ore or scrap metal into the finished, in-place steel or iron product". This requirement will not prevent a minimal use of foreign steel or iron provided the total project delivered cost of all such steel and iron which includes the cost of delivering the steel and iron to the Project, does not exceed one-tenth of one percent of the total Contract cost or \$2,500, whichever is greater.

With every steel or iron product that requires pre-inspection, pretesting, certified test results, or certificate of compliance, the Contractor shall provide a certification by each supplier, distributor, fabricator, and manufacturer that has handled the steel or iron product that every process, including the application of a coating, performed on the steel or iron product either has or has not been carried out in the United States of America. These certifications shall create a chain of custody trail that includes every supplier, distributor, fabricator, and manufacturer that handles the steel or iron product. The lack of these certifications will be justification for rejection of the steel or iron product. Upon completion of the Project, the Contractor shall certify in writing of compliance with this requirement and provide evidence of the Project delivered cost of all foreign steel or iron permanently incorporated into the Project.

## **107.26 TESTING OF MATERIALS**

Tests and Inspections. The City will employ and pay for the services of an approved testing laboratory to perform specified services for the field testing of:

- (a) Soil Compaction Control
- (b) Cast-in-Place Concrete
- (c) Asphalt Concrete Pavement

The Contractor shall perform, or arrange for the performance, and pay all costs in connection therewith, all other tests and inspections required by the Contract documents. The Contractor shall pay for all testing laboratory services in connection with tests verifying conformance of proposed materials and installation with project requirements including, but not limited to, mix designs, riprap, gradation tests for embedment, fill and backfill materials. The City shall pay for testing laboratory services in connection with tests on materials after incorporation into the project, unless retesting of materials is necessary because of the failure of the materials to meet the Project requirements. The Contractor shall obtain the City's written acceptance of the testing laboratory before having services performed.

- (a) Requirements for Independent Testing Consultants.
  - 1. Consultants shall comply with "Recommended Requirements for Independent Laboratory Qualifications", latest edition, published by the American Council of Independent Laboratories, and basic requirements of ASTM E-329, "Standards of Recommended Practice for Inspection and Testing Agencies for Concrete, Steel, and Bituminous Materials as Used in Construction", latest edition.
  - 2. The Contractor shall submit to the City for prior approval, the name and address of the proposed testing laboratory with description of personnel, facilities, equipment and other qualification data, including certificate of calibration of applicable testing equipment made by an accredited calibrated agency no more than twelve (12) months prior to submittal date.
- (b) Test Reports
  - 1. Testing agency shall be instructed to submit directly to the City three (3) copies of all reports of tests or inspections made, showing compliance, irregularities or deficiencies, identifying Project, date of test, location in Project, applicable specification section, applicable standard(s) for compliance, observations relating to compliance, name and signature of inspector.

- (c) Contractor Responsibilities

1. Furnish access to the work, materials, equipment and labor required to accommodate inspections and tests when testing laboratory is retained by the City. In the event retesting of materials or recompaction is necessary because of the failure of the materials or compaction to meet the Project requirements, the cost of said retesting shall be borne by the Contractor. Cost of said retest will be deducted from the final payment amount due the Contractor, or invoiced directly to the Contractor at the City's discretion.

(d) Reliance on Technical Data

Without warranty or representation as to the accuracy or completeness of any information or data, Contractor may rely upon the general accuracy of the "technical data" contained in the reports, specifications and drawings. The "technical data" is identified in the work technical specifications, drawings and reports that are signed and sealed by a registered Professional Engineer, Architect or Landscape Architect in the State of Colorado. Except for the reliance on the general accuracy of the "technical data," Contractor may not rely upon or make any claim against the City with respect to:

1. the accuracy or completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor, and safety precautions and programs incident thereto; or
2. other data, interpretations, opinions, and information contained in the reports or shown or indicated in such drawings; or
3. any Contractor interpretation of or conclusion drawn from any "technical data" or any such other data, interpretations, opinions, or information.

## 107.27 UNANTICIPATED CIRCUMSTANCES

Contractor understands that this is a firm fixed price contract and so long as there are no changes in the scope of work or unanticipated circumstances as provided in subsection A-C below, Contractor must deliver the project for the agreed price. The parties agree that not every circumstance can be anticipated or known at the time this Contract was executed. Compensation for unanticipated circumstances, limited to subsections A –C, shall, at the City's sole discretion, be provided by the following method(s): (1) Unit prices previously approved; (2) allowing additional compensation on a time and materials method, not to exceed an agreed-to amount; (3) an agreed lump sum; and/or (4) the actual cost of:

- (a) labor (including foreman and additional supervision, if necessary);
- (b) materials necessary for incorporation into the Project;
- (c) rental cost of construction plant and equipment used for work:
  - (d) Power and fuel required for operation of power equipment necessary to perform work;
  - (e) Contractor shall provide to the City physical evidence of all costs, including, but limited to, payroll, invoices, vouchers, estimates, bills, accounting records, or other relevant records. Contractor agrees that its failure to provide evidence of a claimed cost shall be a waiver of such cost(s) and the City shall be released and forever discharged from any claim of any kind whatsoever, loss, damages, request for equitable adjustment, or demand related thereto. Contractor further agrees that, at the City's discretion, a fixed fee, not to exceed 10% of the costs of work shall be added to such costs as compensation for the cost of management, insurance, benefits, bond, profit, and any other expenses.

To the extent unanticipated circumstances arise, Contractor shall follow the procedures and processes set forth herein and, if applicable, the Dispute Resolution provisions of this Contract.

## CITY OF COLORADO SPRINGS

Contractor agrees that its failure to follow the processes set forth herein and the Dispute Resolution process shall forever waive, release, and discharge the City from any claim of any kind whatsoever, damages, losses, lawsuits, or demands known or unknown. Additionally, the terms "detail" or "particularity" mean specificity, providing the exact basis and reason therefor with citations to the Contract or Contract Documents. Vague or ambiguous references such as "other matters" or "other costs" shall not be permitted and are not subject to any compensation method whatsoever.

A. Differing Site Conditions or Changed Conditions: A differing site condition or changed condition means subsurface, latent, or unknown physical site conditions that are materially different than that which is indicated in the contract and which is not ordinarily encountered and generally recognized in the work provided for in the Contract.

Contractor understands the City must be permitted the opportunity to timely investigate all differing site/changed condition matters; document conditions as they existed on the site at the time; take measurements, photographs, witness statements and the like; negotiate a compromise resolution with the Contractor and/or subcontractors; and avoid the cost, expense and delay of formal litigation.

Upon discovering a differing site condition, the Contractor shall not disturb the conditions and immediately contact the Project Manager. Within five days of discovering the condition, the Contractor shall provide written notice to the Project Manager of the condition. The written notice shall describe the condition with particularity; provide the precise material difference of the condition from the Contract, design plans, and/or other Contract Documents; describe, in detail, how the condition is not a condition that would be ordinarily encountered and generally recognized in the work provided for in the Contract; and provide a detailed explanation, including all accounting and other evidence supporting, Contractor's losses, costs, delays, and changes in time required for performing the work. Contractor agrees that any claim, loss, damage, delay, or change in time that is not supported by evidence shall be disallowed. Contractor waives and forever releases and discharges the City from any claim of whatsoever kind, loss, damages, demand, and/or request for equitable adjustment whether known or unknown by disturbing the condition before notifying the Project Manager and by failing to provide timely detailed written notice as required herein. Any issue which is not provided for, in detail, in the written notice shall also be waived and the City shall be forever released and discharged from any claim whatsoever, loss, damage, or request for equitable adjustment, or demand arising therefrom.

After Contractor fully complies with the provisions in this section and after receiving the written notice, the Project Manager shall promptly investigate the condition and determine whether such condition materially differs from that indicated in the Contract Documents and whether it is a condition that would not ordinarily be encountered and generally recognized in the work provided for in the Contract. If the Project Manager determines the condition is a "differing site condition," then a Change Order shall be issued describing the differing site condition and compensation method agreed to by the parties. By signing the Change Order, Contractor agrees the City shall be released and fully discharged from any claim whatsoever, loss, damage, request for equitable adjustment, or demand arising from the matters described in the Change Order. The parties shall also sign a document which describes in detail each condition and each claim, loss, damage, delay, or change in time related to that particular condition which was agreed to and fully resolved as well as any condition and each claim loss, damage, delay, or change in time related to that particular condition which is disputed.

If the Contractor disputes, disagrees with, or otherwise considers unfair any decision or ruling by the City, then Contractor shall, within 10 Calendar Days, provide the City with

## CITY OF COLORADO SPRINGS

written notice of the dispute as set forth in the dispute section of this Contract and shall follow the dispute resolution process provided therein.

B. Defective or Deficient Construction Plans or Documents: A defective or deficient construction plan or document means a material error, mistake, oversight, or omission in the design plans or documents providing the specifications depicting the general and detail features of the work to be performed.

Upon discovering a defect or deficiency, the Contractor shall immediately contact the Project Manager. Within five days of initially advising the Project Manager of the defect or deficiency, the Contractor shall provide written notice to the Project Manager. The written notice shall describe the defect or deficiency with particularity explaining why it is a material defect or deficiency; provide precise detail explaining why the defect or deficiency is not something Contractor should know how to do or why the defect or deficiency is not a condition that would be ordinarily encountered and generally recognized in the work provided for in the Contract; and provide a detailed explanation, including all accounting and other evidence supporting, Contractor's losses, costs, delays, and changes in time required for performing the work. Contractor agrees that any claim, loss, damage, delay, or change in time that is not supported by evidence shall be disallowed. Contractor agrees that it shall waive and forever release and discharge the City from any claim of whatsoever kind, loss, damages, demand, and/or request for equitable adjustment whether known or unknown by failing to immediately notifying the Project Manager and by failing to provide timely detailed written notice as required herein. Any issue which is not provided for in the written notice shall also be waived and the City shall be forever released and discharged from any claim whatsoever, loss, damage, or request for equitable adjustment, or demand arising therefrom.

After Contractor fully complies with the provisions in this section and after receiving the written notice, the Project Manager shall promptly investigate the condition and determine whether such matter is a "defective or deficient design plan or document" as defined herein. If the Project Manager determines the matter is a "defective or deficient design plan or document," then a Change Order shall be issued describing the defective or deficient design plan or document, the correction and compensation method agreed to by the parties. By signing the Change Order, Contractor agrees the City shall be released and fully discharged from any claim whatsoever, loss, damage, request for equitable adjustment, or demand arising from the matters described in the change order. The parties shall also sign Form A of this Contract which describes in detail each condition and each claim, loss, damage, delay, or change in time related to that particular condition which was agreed to and fully resolved as well as any condition and each claim loss, damage, delay, or change in time related to that particular condition which is disputed.

If Contractor disputes, disagrees with, or otherwise considers unfair any decision or ruling by the City, then Contractor shall, within 10 Calendar Days, provide the City with written notice of the dispute as set forth in the Dispute Resolution section of this Contract and shall follow the dispute resolution process provided therein.

C. Changes in Work and Additional/Extra Work (fixed price contract): When additional information through excavation, testing, site investigation, differing site conditions, or otherwise is obtained the City shall have the right to alter, change the location, re-design, change the work, add to the work, accelerate work, or reduce work, change the method or manner of performance, change services, and/or change materials described in the Contract (collectively "Changed Work").

If the City changes work, then a Change Order shall be issued by the Project Manager. Contractor shall not be required to perform any Changed Work without a Change Order issued by the Project Manager. Such Changed Work shall be performed under the terms

set forth in the original Contract and compensated as agreed in this section of the Contract.

If Contractor disputes any Changed Work or compensation method for such Changed Work requested by the City or set forth in a Change Order, Contractor shall, without delay, perform such work. Within 10 Calendar Days of receiving the Change Order, Contractor shall provide the City with written notice of the dispute as set forth in the Dispute Resolution section of this Contract and shall follow the dispute resolution process provided therein. Contractor further agrees that any issue not provided for, in detail, in the written notice shall also be waived and the City shall be forever released and discharged from any claim whatsoever, loss, damage, or request for equitable adjustment, or demand arising therefrom. Any matter resolved through the Dispute Resolution process shall be set forth in Form A of this Contract which describes in detail each Changed Work, including the compensation method, which was agreed to and fully resolved. By signing Form A, Contractor agrees that the City shall be released and fully discharged from any claim whatsoever, loss, damage, request for equitable adjustment, or demand arising from the matters described in Form A.

If Contractor does not dispute any Changed Work or the compensation method for such work, then Contractor shall sign the Change Order and agrees that the City shall be released and fully discharged from any claim whatsoever, loss, damage, request for equitable adjustment, or demand arising from the matters described in the Change Order.

Contractor agrees that the Project Manager shall have the authority to make minor changes in the work which do not involve additional costs and are not inconsistent with the purpose and scope of the work.

If the City finds it necessary or advisable, the City may omit, increase, or decrease any items as it may deem necessary or desirable without changing the unit prices in the proposal, provided such increase or decrease does not exceed 15% of the total monetary value of the original Contract. If material or labor involved in such change is not included in the unit prices of the Contract, but forms an inseparable part of the work to be done under this Contract, and the delay involved in asking for the bids or proposals and the letting of a new contract therefore might result in damage, injury, or impairment of the plant, work system, or other property belonging to the City, the City may in its discretion declare an emergency and require Contractor to proceed with such alterations and additions. The Contract shall not be required to perform such work or furnish extra materials without a Change Order issued by the Project Manager.

## **107.28 DISPUTE RESOLUTION**

Mindful of the high cost of litigation, not only in dollars, but also in time and energy, the parties intend to and do hereby establish the following out-of-court alternate dispute resolution procedure to be followed in the event any dispute, claim of any kind, loss, damage, demand, request for equitable adjustment, or controversy should arise out of, or relating to this Contract or relating to any Change Order or other changes or addendums to this Contract. During the dispute resolution procedure provided in this section, Contractor shall continue to perform the work as provided for in this Contract as modified by any Change Order or Contract amendment. Nothing in this section precludes the parties from pursuing any other remedy afforded by the laws of the State of Colorado once the remedies afforded under this Contract have been complied with and exhausted.

A. Disputes Arising from Unanticipated Circumstances: If Contractor disputes, disagrees with, or considers any decision, order, ruling, demand, request, directive, Change Order, or Contract amendment, related to the Unanticipated Circumstances provision of this Contract, and issued by the City, whether verbally or in writing, then Contractor shall:

CITY OF COLORADO SPRINGS

1. Within 10 days of the City issuing any written or verbal decision, order, ruling, demand, request, directive, Change Order, or Contract amendment, Contractor shall provide written notice to the Project Manager identifying, with specific detail, each disputed matter. Any Unanticipated Circumstance dispute or matter of any kind or nature whatsoever, which Contractor does not identify in detail shall be waived and the City is released and fully discharged from any claim whatsoever, loss, damage, request for equitable adjustment, or demand arising from any matter not explicitly set forth in the written notice and described in detail;
  2. Contractor shall provide to the City all evidence of any claim of whatsoever kind, loss, damages, delay cost, or other costs, including, but not limited to payroll reports, daily logs, invoices, accounting file, receipts, email, or other relevant record or document. Any item claimed by Contractor shall be supported by verifiable evidence described herein. If Contractor requires additional time to obtain or compile such evidence, then the Contractor shall have an additional 30 days, but must identify the exact document(s) or other evidence needed, where it is maintained, and explain why it is not available. The City shall not be responsible for any delay or other damage arising from Contractor's request for additional time to obtain documents. Any item unsupported by verifiable evidence shall be waived and Contractor agrees to release and fully discharge the City from any claim of whatsoever kind, loss, damage, request for equitable adjustment, or demand related to such unsupported item.
  3. Upon receipt of Contractor's written notice, the Project Manager will investigate the disputed matter(s) and issue a written decision, ruling, order, and/or directive to Contractor. If Contractor does not dispute the Project Manager's decision, ruling, order, or directive, or a compromise has been reached, then Contractor shall sign Form A. If Contractor disputes or disagrees with the Project Manager's Ruling, then within 20 days of receiving the Project Manager's decision, ruling, order, and/or directive, Contractor must file with the City a written request for review to the City Engineer or City's Manager of the Procurement Services Division. The written request for review shall (a) state in detail the exact issue raised to the Project Manager and the issue(s) related to those matters raised to be reviewed by the City Engineer or Procurement Services Manager; (b) provide an analysis, detailing the basis, reason therefor and the how and why Contractor disagrees with the Project Manager's decision, ruling, order, or directive; and (c) attach all evidence supporting Contractor's dispute. If Contractor fails to provide a timely written request for review to the City Engineer or Procurement Services Manager, then Contractor agrees that it waives, releases, and forever discharges the City from any claim of whatsoever kind, loss, damage, request for equitable adjustment, or demand arising from or related to the Project Manager's decision, ruling, order, or directive.
  4. The City Engineer's or Procurement Services Manager's decision shall be final and conclusive for the City of Colorado Springs. If Contractor disputes, disagrees with, or considers such decision unfair, then Contractor shall be free to pursue any other remedy afforded by the laws of the State of Colorado. If Contractor does not dispute the City Engineer's or Procurement Services Manager's decision, ruling, order, or directive or a compromise is reached, then Contractor shall sign Form A.
  5. Contractor shall pay the City reasonable attorney's fees and costs associated with its failure to comply with any part of this alternate dispute process.
- B. All Other Claims: If a dispute, disagreement, or controversy of any kind, other than those covered in the Unanticipated Circumstances section of this Contract, arises from or is related to the Contract, shall be resolved under the Disputes section in the Contract.

### **107.29 REMOVAL AND SUSPENSION FOR DEFECTIVE WORK**

All work or material which has been rejected shall be remedied or removed and replaced in an acceptable manner. Additional compensation will not be allowed for such removal and replacement. Any work done beyond the lines and grades shown on the drawings, except as herein provided, will be considered as unauthorized and will not be measured or paid for. Work so done may be ordered removed at the Contractor's expense. Should the Contractor fail to comply promptly with any order of the Project Manager made under the provisions of this paragraph, the Project Manager shall have the authority to cause said work to be removed and to deduct the cost from any money due, or to become due, from the Contractor. At any time during the course of construction of this project if the provisions of the Plans, Specifications, or Contract provisions are being violated by the Contractor or his employees, the Project Manager shall have the right and authority to order all construction to cease or material to be removed, until arrangements satisfactory to the Project Manager are made by the Contractor for resumption of the work in compliance with the provisions of the Contract.

The Contractor shall promptly remove from the premises all materials and work rejected by the Project Manager as failing to meet Contract requirements, whether incorporated in the work or not, and the Contractor shall promptly replace and re-execute Contractor's own work in accordance with the Contract and without expense to the City and shall bear the expense of making good all work of other Contractors destroyed or damaged by such removal or replacement.

All removal and replacement work shall be done at the Contractor's expense. If the Contractor does not take action to remove such rejected work and materials within ten (10) days' time thereafter, the City may, upon ten (10) days written notice, sell such materials at auction or at private sale and retain the proceeds without compensation to the Contractor.

### **107.30 CLEANING UP AND FINAL INSPECTION**

The Contractor shall at the completion of the work, remove all rubbish from and about the work and all tools, equipment, scaffolding, and surplus materials and shall leave the work clean and ready for use. If not completed by Contractor, the City may remove the rubbish and surplus materials and charge the cost to the Contractor.

All sewers, conduits, pipes, and appurtenances and all tanks, pump wells, chambers, buildings, and other structures shall be kept clean during construction and as the work or any part thereof approaches completion, the Contractor shall systematically and thoroughly clean and make any needed repairs to them. Contractor shall furnish at Contractor's own expense, suitable tools and labor for removing all water and cleaning out all dirt, mortar, and foreign substances. Any undue leakage of water into the structures such as to make the work, in the opinion of the Project Manager, fall short of first class work, shall be promptly corrected by the Contractor at Contractor's own expense.

Cleaning and repairs shall be arranged, so far as practicable, to be completed upon finishing the construction work. Notice to begin the final cleaning, and repairing, if such is needed, will be given by the Project Manager, who at the same time will make his final inspection of the work. The Project Manager will not approve the final estimate of any portion of the work until after the final inspection is made and the work is found to be satisfactory.

### **107.31 CUTTING AND PATCHING**

The Contractor shall do all cutting, fitting, or patching of work that may be required to make its several parts fit together or to receive the work of other contractors shown upon, or reasonably implied by the Plans and Specifications for the completed Project.

Cold or wet weather conditions that do not permit a permanent asphalt pavement replacement will require a minimum 2" bituminous pavement patch prior to opening the area to traffic as a temporary measure until the permanent asphalt pavement replacement can be installed. This item shall be incidental to any work requiring such removal of asphalt and will be considered to be included in the unit price of the related item of work.

Any cost caused by defective or ill-timed work shall be borne by the Contractor.

The Contractor shall not endanger any work by cutting, digging, or otherwise and shall not cut or alter the work of any other Contractor without the consent of the Project Manager.

### **107.32 FINAL TESTS**

After completion of the work, the Contractor shall make any and all tests required by the Specifications or by municipal, state, or federal regulations, and where so provided in said regulations shall furnish the City with certificates of inspection by the applicable regulatory bodies. The Contractor shall also make all tests required by the National Board of Fire Underwriters for the purpose of determining insurance rates or other protection of the City or the public.

### **107.33 CORRECTION OF WORK AFTER FINAL PAYMENT**

Neither the final payment nor any provision in the Contract Documents shall relieve the Contractor of the responsibility for negligence or faulty materials or workmanship within the extent and periods provided by law and by this Contract.

### **107.34 NO WAIVER OF LEGAL RIGHTS**

Upon written notice that the Contractor considers all work complete, the Project Manager will make a pre-final inspection with the Contractor and will notify the Contractor in writing of incomplete or defective work revealed by the inspection. The Contractor shall promptly remedy such deficiencies.

After the Contractor has remedied all deficiencies to the satisfaction of the Project Manager and delivered all construction records including record drawings, maintenance and operating instructions, schedules, guarantees, bonds, certificates of inspection and other documents (all as required by the Contract Documents), the Contractor will be promptly issued a Certificate of Completion by the Project Manager stating that the work is acceptable.

Upon completion of the Contract, the City will make final inspection and notify the Contractor of acceptance. Final acceptance shall not preclude the City from correcting any measurement, estimate, or certificate made before or after completion of the Contract, nor from recovering from the Contractor or Surety, or both, overpayments sustained because the Contractor failed to fulfill the obligations under the Contract.

The Contractor shall be liable to the City for latent defects, fraud, or such mistakes as may amount to fraud, or as regards the City's rights under any warranty or guarantee.

For all non-federally funded projects, the following additional requirements shall apply:

- (a) All work shall be constructed in compliance with standard construction codes, and all materials and workmanship must be guaranteed for a period of two years from the date of final acceptance. If any defect in the work in violation of the foregoing warranty arises, Contractor shall, upon receipt of written notice of such defect, promptly furnish, at no cost to the City, design and engineering, labor, equipment, and materials necessary to correct

such defect and cause the Work to comply fully with the foregoing warranty and Contract Documents. This obligation shall survive both final completion of and final payment for the Work. The City shall not be invoiced for any of costs of warranty work, and Contractor shall not be entitled to submit any claim for an increased fee arising therefrom. The Contractor guarantee period (two-year warranty period) will not begin until the Contract is 100 percent complete, as determined by the Project Manager. Acceptance of the 100 percent complete work shall be requested in writing by the Contractor. Any item requiring repair and/or replacement prior to expiration of the two-year warranty period shall be guaranteed for a period of one-year after the date of said correction or repair or for the remainder of the two-year warranty period, whichever is longer.

- (b) In placing orders for equipment, the Contractor shall purchase such equipment only under a written guarantee from the respective manufacturers that the equipment supplied will function satisfactorily as an integral part of the completed Project in accordance with the Plans and Specifications. Furthermore, the Contractor shall require that the manufacturer agree in writing at the time an order of equipment is placed that manufacturer will be responsible for the proper functioning of the equipment in cooperation with the Contractor, and that whenever necessary during the installation period or tuning up period following construction period, the manufacturer will supply without additional cost to the City, such superintendence and mechanical labor and any adjustments and additional parts and labor needed to make the equipment function satisfactorily, even if the same was not shown on approved shop drawings.

### **107.35 ACCEPTANCE**

- (a) *Partial Acceptance.* If, during the performance of the project, the Contractor satisfactorily completes a unit or portion of the Project, such as a structure, an interchange, or a section of road or pavement that can be used advantageously for traffic, the Project Manager may make final inspection of that unit. If the Project Manager finds that the unit has been satisfactorily completed in compliance with the Contract, the Contractor may be relieved of further responsibility for that unit except as otherwise provided in these general provisions. Partial acceptance shall not void or alter any of the terms of the Contract.
- (b) *Final Acceptance.* Upon notice from the Contractor of presumptive completion of the entire Project, the Project Manager will make an inspection. If the work provided for by the Contract has been satisfactorily completed, that inspection shall constitute the final inspection and the Project Manager will notify the Contractor in writing of final acceptance indicating the date on which the Project was inspected and accepted.

If the inspection discloses any unsatisfactory work, the Project Manager will give the Contractor a written list of the work needing correction. Upon correction of the work, another inspection will be made. If the work has been satisfactorily completed, the Project Manager will notify the Contractor in writing of the date of final inspection and acceptance. Final acceptance under this subsection does not waive any legal rights contained in the No Waiver of Legal Rights section of this Contract.

## **SECTION 108 PAYMENTS AND ACCEPTANCE OF WORK**

### **108.00 PAYMENTS AND RETAINAGE**

Payments will be made, and required retainage withheld if applicable, in accordance with this section as the work progresses at the end of each month or as soon thereafter as practicable in compliance with C.R.S. Title 24, Article 91, on statements made and approved by the Project Manager. In preparing statements, only completed work will be taken into consideration. No

CITY OF COLORADO SPRINGS

payment will be made for materials in storage and/or delivered to the site, unless otherwise approved by the City.

Payment for work performed by the Contractor under the Contract Documents will be made at the approved unit price or lump sum price for each of the several items as listed in the proposal and measured as hereinafter specified. Such payment shall compensate the Contractor for all costs in connection with furnishing all labor, equipment and material required and performing the operations necessary to complete the item in accordance with the Contract Documents. All incidental work essential to the completion of the Project in a workmanlike manner, and including cleanup and disposal of waste or surplus material, shall be accomplished by the Contractor without additional cost to the City. The cleanup and disposal of waste or surplus material shall be performed during construction or as soon after as is reasonably possible in order to better maintain the aesthetics and safety of the construction area. Payment will be made for the actual quantities constructed or installed, unless otherwise noted in these Contract Documents. However, any changes to plan quantity must be approved through proper Change Order procedures, said quantities being measured as specified in the Contract Documents.

- (1) If the Contract exceeds one hundred fifty thousand dollars (\$150,000.00), and is for the construction, alteration, or repair of any highway, public work, or public improvement, structure, and the Contractor has provided Performance and Payment Bonds: the City shall authorize partial progress payments of the amount due under this Contract monthly, or as soon thereafter as practicable, to the Contractor, if the Contractor is satisfactorily performing the Contract. If the City finds that satisfactory progress is being achieved during any period for which progress is to be made, the City may authorize payment to be made in full without withholding retainage. However, if satisfactory progress has not been made, the City may retain a maximum of ten percent (10%) of the amount of the requested payment until satisfactory progress is achieved. When the work is substantially complete, the City may retain from the remaining unpaid balance that amount the City Procurement Services Manager, at the advice of the Project Manager, considers adequate for protection of the City, suppliers, subcontractors, laborers, vendors, etc., provided that such retainage shall not exceed five percent (5%) of the amount due, and shall release to the Contractor all the remaining funds associated with completed and acceptable work.

If satisfactory progress has not been made the withheld percentage of the Contract price of any such work, improvement, or construction shall be retained on an invoice-to-invoice basis and shall not be cumulative. In other words, if the Contractor is not performing satisfactorily the City will hold ten percent (10%) of what is actually due to the Contractor. For example, if the Contractor is behind schedule and has successfully completed fifty percent (50%) of the work, the City will only pay forty percent (40%) of the invoice, withholding ten percent (10%) of what is due until the Contractor gets back on schedule.

- (2) Whenever a Contractor receives payment pursuant to this section, the Contractor shall make payments to each of the subcontractors of any amount actually received which were included in the Contractor's request for payment to the City for such subcontracts. The Contractor shall make such payments within seven (7) Calendar Days of receipt of payments from the City in the same manner as the City is required to pay the Contractor under this section if the subcontractor is satisfactorily performing under the Contract with the Contractor. The subcontractor shall pay all suppliers, sub-subcontractors, laborers, and any other persons who provide goods, materials, labor, or equipment to the subcontractor any amounts actually received which were included in the subcontractor's request for payment to the Contractor for such persons, in the same manner set forth in this subsection (2) regarding payments by the Contractor to the subcontractor. If the subcontractor fails to make such payments in the required manner, the subcontractor shall pay those suppliers, sub-subcontractors, and laborers interest in the same manner set forth in this subsection (2) regarding payments by the Contractor to the subcontractor.

At the time a subcontractor submits a request for payment to the Contractor, the subcontractor shall also submit to the Contractor a list of the subcontractor's suppliers, sub-subcontractors and laborers. The Contractor shall be relieved of the requirements of this subsection (2) regarding payment in seven (7) days and interest payment until the subcontractor submits such list. If the Contractor fails to make timely payments to the subcontractor as required by this section, the Contractor shall pay the subcontractor interest as specified by Contract or at the rate of fifteen percent (15%) per annum, whichever is higher, on the amount of the payment which was not made in a timely manner. The interest shall accrue for the period from the required payment date to the date on which payment is made. Nothing in this subsection (2) shall be construed to affect the retention provisions of any Contract.

- (3) If the Contractor is not progressing in accordance with the Project Schedule or not performing quality work in accordance with the specifications, the City Procurement Services Manager, at the advice of the Project Manager may withholding retainage up to and including ten percent (10%) of the total contract amount.

### **108.01 PAYMENTS WITHHELD PRIOR TO FINAL ACCEPTANCE OF WORK**

The City may withhold or nullify the whole or part of any certificate of payment to such extent as may be necessary to protect it from loss caused by:

- (a) Defective work not remedied.
- (b) Claims filed or reasonable evidence indicating probable filing of claims by other parties against the Contractor.
- (c) Failure of the Contractor to make payments properly to subcontractors or for material or labor.
- (d) Damage to another contractor.

When the above grounds are removed, payment will be made for amounts withheld because of them.

### **108.02 ACCEPTANCE OF FINAL PAYMENT**

If the work is finally accepted by Project Manager under the terms and conditions of the Contract the entire balance found by the Project Manager to be due the Contractor, including the retained percentage, less any retention based on; (1) the Project Manager's estimate of the fair value of the claims against the Contractor; and (2) the cost of completing the incomplete or unsatisfactory items of work with specified amounts for each incomplete or defective item of work; and (3) retentions required by law, shall be due and payable to the Contractor. The date of completion is the date as specified in the Certificate of Completion issued by the Project Manager.

Upon completion of the work under the Contract and before the Contractor will receive or be paid for the Project Manager's final statement, the City Procurement Services Division shall post a notice on the website [www.coloradosprings.gov](http://www.coloradosprings.gov) that the City has accepted such work as completed according to the Plans and Specifications and rules set forth in the Contract; that the Contractor is entitled to final settlement; that after the date specified in the Notice, the City will pay the full balance due under the Contract; and that persons having claims for labor or material furnished the Contractor must present their claim to the City Procurement Services Division prior to the date specified for such payment. Nothing herein shall be construed as relieving the Contractor and the Sureties on the Contractor's bonds from any claim or claims for work or labor done or materials or supplies furnished in the execution of the Contract.

**CITY OF COLORADO SPRINGS**

The making and acceptance of the final payment shall constitute a waiver of all claims by the Contractor against the City.

If, after the work has been substantially completed, full completion thereof is materially delayed through no fault of the Contractor, and the Project Manager so certifies, the City may, upon Certificate of Completion by the Project Manager, and without terminating the Contract, make payment of the balance due for that portion of the work fully completed and accepted. Such payment shall be made under the terms and conditions governing final payment, and acceptance of the payment shall constitute a waiver of all claims by the Contractor but acceptance of the work shall not constitute a waiver of City claims against the Contractor.

Advertising for Final Payment and processing of the Final Pay Request shall not take place until after the Contractor has submitted Sales and Use Tax Forms to the City and said forms have been reviewed and approved by the City Sales Tax Office.

**SCHEDULE D**

**D.1 TECHNICAL SPECIFICATIONS**

The Standard Specifications for this project shall be the latest version of the "CITY OF COLORADO SPRINGS ENGINEERING DIVISIONS STANDARD SPECIFICATIONS", (revised Feb. 1995, General Provisions revised January 2008 and Sections 400, 410 and 420 Revised January 2007), except as modified hereinafter, which are incorporated in the contract documents by reference as though embodied herein in their entirety.

All Contractors on this project are required to have on the job site and utilize the current updated copy of the City of Colorado Springs Engineering Divisions Standard Specifications.

**D.2 APPLICABLE SPECIFICATIONS:**

**02230 SITE CLEARING (REVISED 2013)**

**PART 1 – GENERAL**

**1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. This Section includes the following:
1. Examination of the site.
  2. Marshalling and access.
  3. Protecting existing trees and vegetation to remain.
  4. Removing trees and other vegetation.
  5. Clearing and grubbing.
  6. Topsoil stripping.
  7. Removing above-grade site improvements.
  8. Disconnecting, capping or sealing, and abandoning site utilities in place.
  9. Disconnecting, capping or sealing, and removing site utilities.
- B. Related Sections include the following:
1. Division 1 Section "Field Engineering" for verifying utility locations and for recording field measurements.
  2. Division 1 Section "Construction Facilities and Temporary Controls" for temporary utilities, temporary construction and support facilities, temporary security and protection facilities and environmental protection measures during site operations.
  3. Division 2 Section "Tree Protection and Trimming" for protecting trees remaining on-site that are affected by site operations.
  4. Division 2 Section "Earthwork" for soil materials, excavating, backfilling, and site grading.
  5. Division 2 Section "Landscaping" for finish grading, including placing and preparing topsoil for lawns and planting.

**1.3 DEFINITIONS**

- A. Topsoil: Natural or cultivated surface-soil layer containing organic matter and sand, silt, and clay particles; friable, pervious, and black or a darker shade of brown, gray, or red than underlying subsoil; reasonably free of subsoil, clay lumps, gravel, and other objects more than ¾ inches in diameter; and free of weeds, roots and other deleterious materials.

**1.4 MATERIALS OWNERSHIP**

- A. Except for materials to be stockpiled or to remain Owner's property, cleared materials shall become Contractor's property and shall be removed from the site.

**1.5 SUBMITTALS**

- A. Photographs or videotape, sufficiently detailed, of existing conditions of trees and plantings, adjoining construction, and site improvements that might be misconstrued as damage caused by site clearing
- B. Record drawings according to Division 1 Section "Contract Close-out."
  - 1. Identify and accurately locate capped utilities and other subsurface structural, electrical, and mechanical conditions.
- C. An approved traffic control plan and all environmental permits as required by local and state agencies.

**1.6 QUALITY ASSURANCE**

- A. Pre-installation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings".

**1.7 PROJECT CONDITIONS**

- A. The Contractor shall visit, inspect and thoroughly become familiar with the site and the scope of work. The Contractor will judge conditions that will exist when carrying out the contract. The Contractor shall meet with the Owner's Representative to determine the point of access and marshaling area to be utilized to perform this work. No gasoline, oil concrete or other material shall be dumped anywhere on site.
- B. Traffic: Minimize interference with adjoining roads, streets, walks, and other adjacent occupied or used facilities during site-clearing operations.
  - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction.
  - 2. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.
  - 3. When working in the City Right of Way, submit an approved traffic control plan to Owner's Representative.
- C. Improvements on Adjoining Property: Authority for performing indicated removal and alteration work on property adjoining Owner's property will be obtained by owner before award of Contract.
- D. Salvable Improvements: Carefully remove items indicated to be salvaged and store on Owner's premises where indicated.
- E. Notify utility locator service for area where Project is located before site clearing.

**PART 2-PRODUCTS**

**2.1 SOIL MATERIALS**

- A. Satisfactory Soil Materials: Requirements for satisfactory soil materials are specified in Division 2 Section "Earthwork."
  - 1. Obtain approved borrow soil materials off-site when satisfactory soil materials are not available on-site.

**PART 3-EXECUTION**

**3.1 PREPARATION**

- A. Protect and maintain benchmarks and survey control points from disturbance during construction. B. Submit a storm water control plan and fugitive dust permit as required by local and state agencies.
- C. Provide erosion-control measures to prevent soil erosion and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.
- D. Locate and clearly flag trees and vegetation to remain or to be relocated. E. Refer to City of Colorado Springs storm water management manual.
- F. Protect existing site improvements both in and outside of construction zone.

1. Restore damaged improvements both on and off the site to their original condition, as acceptable to Owner.

### **3.2 TREE PROTECTION**

- A. Erect and maintain a temporary fence around drip line of individual trees or around perimeter drip line of groups of trees to remain. Remove fence when construction is complete.
  1. Do not store construction materials, debris, or excavated material within drip line of remaining trees.
  2. Do not permit vehicles, equipment, or foot traffic within drip line of remaining trees.
- B. Do not excavate within drip line of trees, unless otherwise indicated.
- C. Refer to the related plans as indicated, and/or consult with the City Forester or the Designee assigned to the project.
- D. Furnish all labor, material, tools, land equipment necessary to complete the work indicated on drawings and as required herein
- E. Existing trees to remain shall be protected at all times during the Contract period, by using fencing (i.e., snow fencing, or chain link fencing with metal staking). Tree protection fencing shall be maintained by the Contractor during construction. The Protection area to be fenced two inches (2') outside the dripline of the tree unless otherwise required by the Owner's Representative. No equipment shall be parked, driven or material stockpiled within the dripline area of the existing trees to remain. No gasoline, oil, chemicals, concrete or other material shall be dumped anywhere on site. Where vehicle or equipment traffic if necessary in the protection area of a tree, the soil shall be protected from compaction by (6"-10") layer of wood chip mulch.
- F. Any trees damaged during construction shall be promptly reported to the Owner's Representative, who shall contact the City Forester or the Designee for an assessment of damages. The contractor will be responsible for repair or replacement to the satisfaction of the City Forester or the Designee.
- G. Tree roots are to be clean cut when necessary using proper equipment, i.e. loppers or concrete saw. The Contractor shall submit with the Bid the cost to implement proper boring under roots.
- H. The City Forester or the Designee will be informed of all construction projects, especially when trees are involved.
- I. The City Forester or the Designee will survey the site to set and determine what the contractor needs to do before construction begins. The Contractor shall set up tree protection devices.
- J. The City Forester or the Designee shall be informed of:
  1. Soil grade changes adjacent to trees.
  2. Probable trenching through roots.
  3. Location of stored heavy equipment.
  4. Paths heavy equipment will take during construction project, to avoid root compaction and root breakage.
- K. The City Forester or the Designee shall be notified during the project design phase, to aid in tree protection during the primary phase.
  1. When equipment must be used in close proximity of the trunk, the entire tree trunk shall be protected by banding large 2"x4" wooden boards to avoid direct contact. The soil shall be protected from compaction with a 6-10" layer of wood chip mulch.
  2. The Forestry Division will conduct all pruning if limb elevation is needed to avoid equipment contact.
- L. Where excavation for new construction is required within drip line of trees, hand clear and excavate to minimize damage to root systems. Use narrow-tine spading forks, comb soil to expose roots, and cleanly cut roots as close to excavation as possible.
  1. Cover exposed roots with burlap and water regularly.
  2. Temporarily support and protect roots from damage until they are permanently relocated and covered with soil.
  3. Cover exposed roots with wet burlap to prevent roots from drying out. Backfill with soil as soon as possible.

- M. Rehabilitate or replace trees and vegetation indicated to remain that are damaged by construction operations, in a manner approved by Architect.
  - 1. Employ a qualified arborist, as approved by the City Forester or the Designee, to submit details of proposed rehabilitation for the damage to trees and shrubs.
  - 2. The Contractor will replace trees that cannot be rehabilitated and restored to full-growth status, as determined by the qualified arborist and the City Forester or the Designee

### **3.3 UTILITIES**

- A. Contractor will coordinate for disconnecting and sealing indicated utilities that serve existing structures before site clearing with Owner's Representative.
  - 1. Verify that utilities have been disconnected and capped before proceeding with site clearing.
- B. Locate, identify, disconnect, and seal or cap off utilities indicated to be removed.
  - 1. Owner will arrange to shut off indicated utilities when requested by Contractor.
  - 2. Arrange to shut off indicated utilities with utility companies.
- C. Existing Utilities: Do not interrupt utilities serving facilities occupied by Owner or other unless permitted under the following conditions and then only after arranging to provide temporary utility services according to requirements indicate.
  - 1. Notify Owner's Representative not less than two days in advance of proposed utility interruptions.
  - 2. Do not proceed with utility interruptions without Owner's Representative written permission.
- D. Excavate for and remove underground utilities indicated to be removed.

### **3.4 CLEARING AND GRUBBING**

- A. Remove obstructions, trees, shrubs, grass, and other vegetation to permit installation of new construction. Removal includes digging out stumps and obstructions and grubbing roots.
  - 1. Do not remove trees, shrubs, and other vegetation indicated to remain or to be relocated.
  - 2. Cut minor roots and branches of trees indicated to remain in a clean and careful manner where such roots and branches obstruct installation of new construction.
  - 3. Completely remove or grind stumps, roots, obstructions, and debris extending to a depth of 18 inches below exposed subgrade.
  - 4. Use only hand methods for grubbing within drip line of remaining trees.
- B. Fill depressions caused by clearing and grubbing operations with satisfactory soil material, unless further excavation or earthwork is indicated.
  - 1. Place fill material in horizontal layers not exceeding 8-inch loose depth, and compact each layer to a density equal to adjacent original ground.

### **3.5 TOPSOIL STRIPPING**

- A. Remove sod and grass before stripping topsoil.
- B. Strip topsoil to whatever depths are encountered in a manner to prevent intermingling with underlying subsoil or other waste materials.
  - 1. Strip surface soil of unsuitable topsoil, including trash, debris, weeds, roots, and other waste materials.
- C. Stockpile topsoil materials away from edge of excavations without intermixing with subsoil. Grade and shape stockpiles to drain surface water. Comply with fugitive dust permit.
  - 1. Do not stockpile topsoil within drip line of remaining trees.
  - 2. Dispose of excess topsoil as specified for waste material disposal.

### **3.6 SITE IMPROVEMENTS**

- A. Remove existing above- and below-grade improvements as indicated and as necessary to facilitate new construction.
- B. Remove slabs, paving, curbs, gutters, and aggregate base as indicated.
  - 1. Unless existing full-depth joints coincide with line of demolition, neatly saw-cut length of existing pavement to remain before removing existing pavement. Saw-cut faces vertically.

**3.7 DISPOSAL**

- A. Disposal: Remove surplus soil material, unsuitable topsoil, obstructions, demolished materials, and waste materials, including trash and debris, and legally dispose of them off Owner's property. All associated costs and fees are the responsibility of the contractor.

**END OF SECTION 02230 SITE CLEARING (REVISED 2013)**

**02231-TREE PROTECTION AND PRUNING (REVISED 2013)**

**PART 1-GENERAL**

**1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. This Section includes the protection and pruning of trees that interfere with, or are affected by, execution of the Work, whether temporary or new construction.
- B. Related Sections include the following:
  - 1. Division 1 Section "Summary of Work" for limits placed on Contractor's use of the site.
  - 2. Division 1 Section "Construction Facilities and temporary Controls" for temporary tree protection.
  - 3. Division 2 Section "Site Clearing" for removal limits of trees, shrubs, and other plantings affected by new construction.
  - 4. Division 2 Section "Landscaping: for tree and shrub planting and transplanting, tree support systems, and soil materials.
- C. The Contractor shall visit, inspect and become thoroughly familiar with the site and the scope of work. The Contractor will judge the conditions that will exist when he carries out his contract.
- D. The Contractor shall meet with the Owner's Representative to determine the point of access and marshaling area to be utilized to perform this work.
- E. Refer to the related guidelines as indicated, and/or consult with the City Forester or the Designee assigned to the project.
- F. Furnish all labor, materials, tools, and equipment necessary to complete the work indicated on drawings and as required herein. This shall include:
  - 1. Proper root cutting.
  - 2. Erecting the required fencing when needed.
  - 3. Installing the correct and necessary tree barrier devices.
  - 4. Protecting the soil around trees from compaction.
- G. The City Forester or the designee will be informed of all construction projects, especially when trees are involved.
- H. The City Forester or the designee will survey the site to set up tree protection devices and determine what the Contractor needs to do, before construction begins.
- I. The City Forester or the designee shall be informed of:
  - 1. Soil grade changes adjacent to trees.
  - 2. Probable trenching through roots.
  - 3. Location of stored heavy equipment.
- J. Paths heavy equipment will take during construction project, to avoid root compaction and root breakage.
- K. The City Forester shall be notified during the project design phase, to aid in tree protection during the primary phase.
- L. When equipment must be used in close proximity of the trunk, the entire tree trunk shall be protected by banding large 2"x4" wooden boards to avoid direct contact. The soil shall be protected from compaction with a 6-10" layer of wood chip mulch.

**1.3 SUBMITTALS**

- A. Maintenance Recommendations: From a qualified arborist for care and protection of trees affected by construction during and after completing the Work.

**1.4 QUALITY ASSURANCE**

- A. Pre-installation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings"

Before starting tree protection and pruning, meet with representatives of authorities having jurisdiction, Owner, Architect, consultants, and other concerned entities. Review tree protection and pruning procedures and responsibilities. Notify participants at least three working days before convening conference. Record discussions and agreements and furnish a copy to each participant.

## **PART 2-PRODUCTS**

### **2.1 MATERIALS**

- A. Drainage Fill: Selected crushed stone, or crushed or uncrushed gravel, washed, ASTM D 448, Size 24, with 90 to 100 percent passing a 2-1/2-inch sieve and not more than 10 percent passing a 3/4-inch sieve.
- B. Topsoil: Fertile, friable, surface soil, containing natural loam and complying with ASTM D 5268. Provide topsoil, that is free of stones larger than 1 inch in any dimension and free of other extraneous or toxic matter harmful to plant growth. Obtain topsoil only from well-drained sites where soil occurs in depth of 4 inches or more; do not obtain from bogs or marshes.
- C. Filter Fabric: Manufacturer's standard, pervious, geotextile fabric of polypropylene, nylon, or polyester fibers.
- D. Construction fence with T-posts.

## **PART 3-EXECUTION**

### **3.1 PREPARATION**

- A. Temporary Fencing: Install temporary fencing located as indicated or outside the drip line of trees to protect remaining vegetation from construction damage.
  - 1. Install construction fencing.
- B. Protect tree root systems from damage due to noxious materials caused by runoff or spillage while mixing, placing, or storing construction materials. Protect root systems from flooding, eroding, or excessive wetting caused by de-watering operations.
- C. Do not store construction materials, debris, or excavated material within the drip line of remaining trees. Do not permit vehicles or foot traffic within the drip line; prevent soil compaction over root systems.
- D. Existing trees to remain shall be protected at all times during the Contract period, by using fencing (i.e., snow fencing, construction fencing with metal staking). Tree protection fencing shall be maintained by the Contractor during construction. The protection area to be fenced (2') outside the drip line of the tree unless otherwise required by the Owner's Representative. No equipment shall be parked, driven or material stockpiled within the drip line area of the existing trees to remain. No gasoline, oil, chemicals, concrete or other material shall be dumped anywhere on site. Where vehicle or equipment traffic is necessary in the protection area of a tree, the soil shall be protected from compaction by (6"-10") layer of wood chip mulch.

### **3.2 EXCAVATION**

- A. Install shoring or other protective support systems to minimize sloping or benching of excavations.
- B. Do not excavate within drip line of trees, unless otherwise indicated.
- C. Where excavation for new construction is required within drip line of trees, hand clear and excavate to minimize damage to root systems.
- D. Where utility trenches are required within drip line of trees, tunnel under or around roots by drilling, auger boring, pipe jacking, or digging by hand.
  - 1. Root Pruning: Prior approval is needed from the City Forester or Designee to cut main lateral roots or taproots; cut only smaller roots that interfere with installation of utilities. Cut roots with sharp pruning instruments; i.e. chain saw, reciprocating saw or pruning saw. Stump grinding equipment allowed so long as the final cut is clean, not ragged. Do not break, chop, rip or otherwise mangle roots.

**3.3 RE-GRADING**

- A. Grade Lowering: Where new finish grade is indicated below existing grade around trees, slope grade beyond drip line of trees. Maintain existing grades within drip line of trees.

**3.4 TREE PRUNING**

- A. The Forestry Division will conduct all pruning if limb elevation is needed to avoid equipment contact.

**3.5 TREE REPAIR AND REPLACEMENT**

- A. Aerate surface soil, compacted during construction, 10 feet beyond drip line and no closer than 36 inches to tree trunk. Drill 2-inch- diameter holes a minimum of 12 inches deep at 24 inches o.c. Backfill holes with an equal mix of augered soil and sand. Aeration of the surface soil may be required due to compaction during construction.
- B. Any trees damaged during construction shall be promptly reported to the Owner's Representative, who shall contact the City Forester or designee for an assessment of damages. The Contractor will be responsible for repair or replacement to the satisfaction of the City Forester or designee.

**3.6 DISPOSAL OF WASTE MATERIALS**

- A. Disposal: Remove excess excavated material, displaced trees, and excess chips from Owner's property. Burning is not permitted, dispose of site legally.

**END OF SECTION 02231 – TREE PROTECTION AND PRUNING (REVISED 2013)**

**02920 – SEEDING AND SODDING (REVISED 2013)**

**PART 1 – GENERAL**

**1.1 Related Documents**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Seeding.
  - 2. Sodding.
  - 3. Plugging.
  - 4. Meadow grasses and wildflowers.
  - 5. Sod renovation.
- B. Related Sections include the following:
  - 1. Division 2 Section “Site Clearing” for topsoil stripping and stockpiling.
  - 2. Division 2 Section “Earthwork” for excavation, filling and backfilling, and rough grading.
  - 3. Division 2 Section “Sub-drainage” for subsurface drainage.

**1.3 DEFINITIONS**

- A. Finish Grade: Elevation of finished surface of planting soil.
- B. Manufactured Soil: Soil produced off-site by homogeneously blending mineral soils or sand with stabilized organic soil amendments to produce topsoil or planting soil.
- C. Planting Soil: Native or imported topsoil, manufactured topsoil, or surface soil modified to become topsoil; mixed with soil amendments.
- D. Subgrade: Surface or elevation of subsoil remaining after completing excavation, or top surface of a fill or backfill immediately beneath planting soil.

**1.4 SUBMITTALS**

- A. Product Data: For each type of product indicated.
- B. Certification of Grass Seed: From seed vendor for each grass-seed monostand or mixture stating the botanical and common name and percentage by weight of each species and variety, and percentage of purity, germination, and weed seed. Include the year of production and date of packaging.
  - 1. Certification of each seed mixture for turf grass sod, identifying source, including name and telephone number of supplier.
- C. Product Certificates: For soil amendments and fertilizers, signed by product manufacturer.
- D. Qualification Data: For landscape installer.
- E. Material Test Reports: For existing surface soil and imported topsoil
- F. Maintenance Instructions: Upon completion of all sodding operations, the Contractor shall notify the Owner’s Representative to inspect the work. Upon inspection, if all work is acceptable, the Owner’s Representative shall record that date and shall issue a “Conditional Acceptance” letter which shall state that the Contractor shall maintain all sodded areas as specified according to the following length of time. As indicated in section 1.8.

**1.5 QUALITY ASSURANCE**

- A. Installer Qualifications: All work specified herein shall be performed under the direct supervision of a Superintendent thoroughly familiar with the work of this section who shall be at the project site for the duration of the work in this section.
  - 1. Installer’s Field Supervision: Require Installer to maintain an experienced full-time supervisor on Project site when planting is in progress.
- B. Installer Qualifications: All work specified herein shall be performed under the direct supervision of a Superintendent thoroughly familiar with the work of this section who shall be at the project site for the duration of the work in this section.

CITY OF COLORADO SPRINGS

1. Installer's Field Supervision: Require Installer to maintain an experienced full-time supervisor on Project site when planting is in progress.
- C. Soil-Testing Laboratory Qualifications: An independent laboratory, recognized by the State Department of Agriculture, with experience and capability to conduct the testing indicated and that specializes in types of tests to be performed.
- D. Topsoil Analysis: Furnish soil analysis by a qualified soil-testing laboratory stating percentages of organic matter; gradation of sand, silt, and clay content; cation exchange capacity; sodium absorption ratio; deleterious material; pH; and mineral and plant-nutrient content of topsoil.
  1. Report suitability of topsoil for Sod growth. State recommended quantities of nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory topsoil.
- E. Pre-installation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Management and Coordination."

**1.6 DELIVER, STORAGE, AND HANDLING**

- A. Seed: Deliver seed in original sealed, labeled, and undamaged containers.
- B. Sod: Harvest, deliver, store, and handle sod according to requirements in TPI's "Specifications for Turfgrass Sod Materials" and "Specifications for Turfgrass Sod Transplanting and Installation" in its "Guideline Specifications to Turfgrass Sodding."

**1.7 SCHEDULING**

- A. Planting Restrictions: Plant during one of the following periods unless otherwise approved by Owner's Representative. Coordinate plating periods with maintenance periods to provide r required maintenance from date of Substantial Completion.
  1. Sodding: April 15th-October 15th.
  2. Seeding: March 1st-September 15th.
  3. Irrigated Native Seeding: March 1st-September 15th.
  4. Non Irrigated Native Seeding: November 1st-May 15th.
- B. Weather Limitations: Proceed with planting only when existing and forecasted weather conditions permit. No sodding shall take place when the site is wet or during freezing temperatures.

**1.8 TURF MAINTENANCE**

- A. Begin maintenance immediately after each area is planted and continue until acceptable Sod is established, but for not less than the following periods:
  1. Seeded Turf: 60 days from date of Substantial Completion.
  2. Native Seeding: 60 days from date of Substantial Completion.
  3. Sodded Turf: 30 days from date of Substantial Completion.
- B. A period of 30 calendar days minimum, which shall be referred to as the "Sod Maintenance Period." At the end of this period, the sodded areas shall be given "Final Acceptance" if the sod is in a healthy condition and of a normal green color, with no bare areas larger than six (6) square inches. Mowing of sod should occur (3) days before "Final Acceptance." If sod is installed in late October, a "Final Acceptance" for sod will not be issued, until the following spring.
- C. At the end of the maintenance period, the Owner's Representative shall, within five (5) calendar days, inspect the work, and if the work is acceptable, he shall issue a Final Acceptance Sod Work" letter which shall relieve the Contractor from further obligations for Sod work only. Final acceptance of Sod work may be given independently of final acceptance of all work under this contract.
- D. The maintenance period for this work shall begin immediately after each area is sodded and shall continue in accordance with the following requirements:
  1. Minor vandalism or other damage to the sodded areas shall be the responsibility of the Contractor until all work receives Final Acceptance by the Owner's Representative. Major vandalism or damage caused by others through no fault of the Contractor or his subcontractor shall be brought to the attention of the Owner's Representative who will be the

sole judge as to the extent of such damage. If such damage is deemed to be major by the Owner's Representative, any work necessary to repair the seeded or sodded area to an acceptable condition shall be paid for by the Owner under the provisions of "extra work" stated in the General Conditions, if such work is authorized by the Owner's Representative.

2. Acts of God: Minor damage to the sodded areas shall be the responsibility of the Contractor until all work receives Final Acceptance by the Owner's Representative.

Major damage caused by flood, hail, storm, wind, or large rain storm, and through no fault of the Contractor to protect his work, shall immediately be brought to the attention of the Owner's Representative who will be the sole judge as to the extent of such damage. Major damage shall be repaired by the Contractor and paid for by the Owner, if such work is authorized by the Owner's Representative.

When full maintenance period has not elapsed before end of planting season, or is Sod is not fully established, continue maintenance during next planting season.

- E. Maintain and establish Sod by watering, fertilizing, weeding, mowing, trimming, replanting, and other operations. Rolls, regrade, and replant bare or eroded areas and remulch to produce a uniformly smooth turf.

- 1. In areas where mulch has been disturbed by wind or maintenance operations, add new mulch. Anchor as required to prevent displacement.

- F. Watering: Provide and maintain temporary piping, hoses, and turf-watering equipment to convey water from sources and to keep Sod uniformly moist.

- 1. Schedule watering to prevent wilting, puddling, erosion, and displacement of seed or mulch.

- Lay our temporary watering system to avoid walking over muddy or newly planted areas.

- 2. Water Sod at a minimum rate of 1 1/2" to 2" per week.

- G. The Contractor shall be responsible for watering and mowing of the sodded areas only until Final Acceptance. The bluegrass sod shall be maintained at a height of three inches (3") and of four inches (4"). If grass exceeds four inches (4") in height before mowing, no more than (1/3) of top growth shall be cut off at anyone time. All clippings shall be removed from site. Do not delay mowing until grass blades bend over and become matted. Do not mow when grass is wet. Schedule initial and subsequent mowing to maintain consistent grass height. Sufficient water shall be applied during the maintenance period to maintain the sod in a healthy condition, allowing it to knit together and develop a deep root system. Care should be given to avoid standing surface water, or erosion from over watering. Failure of the irrigation system shall not relieve the Contractor from applying water required during this period.

## 1.9 NATIVE SEEDING MAINTENANCE

- A. Begin maintenance immediately after each area is planted and continue until acceptable meadow is established, but for not less than 60 days from date of Substantial Completion. The maintenance period for this work shall begin immediately after all areas are seeded and shall continue in accordance with the following requirements:
  - 1. All seeded areas shall have suitable signs erected at important points, notifying the public to keep off.
- B. Minor vandalism or other damage to the seeded areas shall be the responsibility of the Contractor until all work receives Final Acceptance by the Owner's Representative. Major vandalism or damage caused by others through no fault of the Contractor or his subcontractor shall be brought to the attention of the Owner's Representative who will be the sole judge as to the extent of such damage. If such damage is deemed to be major by the Owner's Representative, any work necessary to repair the seeded area to an acceptable condition shall be paid for by the Owner under the provision of "extra work" stated in the General Conditions, if such work is authorized by the Owner's Representative.
- C. Acts of God: Minor damage to the seeded areas shall be the responsibility of the Contractor until all work receives Final Acceptance by the Owner's Representative. Major damage caused by flood, hail storm, wind or large rain storm, and through no fault of the Contractor to protect his work, shall immediately be brought to the attention of the Owner's Representative who will be the site judge as to the extent of such damage. Major damage shall be repaired by the Contractor and paid for by the Owner under the provisions of City of Colorado Springs

- Engineering Division Standard Specifications Section 100.23 "Changed Conditions", if such work is authorized by the Owner's Representative.
- D. The Contractor shall be responsible for watering and mowing the seeded areas only until final Acceptance. Mowing shall be conducted at a maximum of six inches (6"), and mowed down to four inches (4").
  - E. Upon completion of all seeding operations, the Contractor will notify the Owner's Representative to inspect the work. Upon inspection, if all work is acceptable, the Owner's Representative shall record that date and shall issue a "Conditional Acceptance" letter which shall state that the Contractor shall maintain all seeded areas as specified according to the following length of time.
  - F. Period of 60 calendar days minimum, which shall be referred to as the "Seeded Area Maintenance Period". AT the end of this period, the seeded areas shall be given "Final Acceptance" if the seed has germinated and there are no bare areas larger than six (6) square inches in diameter shall be re-seeded. AT the end of the maintenance period, the Owner's Representative shall, within five (5) calendar days, inspect the work, and if the work is acceptable, he shall relieve the Contractor from further obligations for seeding work only. Final acceptance of seeding work may be given independently of final acceptance of all work under this contract.
  - G. Maintain and establish meadow by watering, weeding, mowing, trimming, replanting, and other operations. Roll, regrade and replant bare or eroded areas and remulch.
  - H. Watering: Provide and maintain temporary piping, hoses, and turf-watering equipment to convey water from sources and to keep meadow uniformly moist.
    - 1. Schedule watering to prevent wilting, puddling, erosion, and displacement of seed or mulch.Lay out temporary watering system to avoid walking over muddy or newly planted areas.
    - 2. Water meadow at a minimum rate of 1/2 inch per week for 8 weeks after planting

## **PART 2 – PRODUCTS**

### **2.1 SEED**

- A. Grass Seed: Fresh, clean, dry, new-crop seed complying with AOSA's "Journal of Seed Technology; Rules for Testing Seeds" for purity and germination tolerances.
- B. Seed Species: State-certified seed of grass species, as follows:
- C. Seed Species: As specified on drawings.

### **2.2 TURFGRASS SOD**

- A. Turfgrass Sod: Blended Kentucky Bluegrass.

### **2.3 NATIVE GRASSES AND WILDFLOWERS**

- A. Wildflower Seed: Fresh, clean, dry, new seed, mixed species as follows:
- B. Native Grass Seed: Fresh, clean, dry, new seed, mixed species as follows:
- C. Wildflower and Native Grass Seed: Fresh, clean, dry, new seed, mixed species as follows:
- D. Seed Carrier: Inert material, sharp clean sand or perlite, mixed with seed at a ratio of not less than two parts seed carrier to one part seed.

### **2.4 TOPSOIL**

- A. Topsoil: ASTM D 5268, pH range of 5.5 to 7, a minimum of 4-percent organic material content; free of stones 3/4 inch or larger in any dimension and other extraneous materials harmful to plant growth.
  - 1. Topsoil Source: Reuse surface soil stockpiled on-site. Verify suitability of stockpiled surface soil to produce topsoil. Clean surface soil of roots, plants, sod, stones, clay lumps, and other extraneous materials harmful to plant growth.
  - 2. Topsoil Source: Import topsoil or manufactured topsoil from off-site sources. Obtain topsoil displaced from naturally well-drained construction or mining sites where topsoil occurs at least 4 inches deep; do not obtain from agricultural land, bogs or marshes.

3. Topsoil Source: Amend existing in-place surface soil to produce topsoil. Verify suitability of surface soil to produce topsoil. Clean surface soil of roots, plants, sod, stones, clay lumps, and other extraneous materials harmful to plant growth.

**2.5 ORGANIC SOIL AMENDMENTS**

- A. Compost: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1-inch sieve; soluble salt content of 5 to 10 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
  - 1. Organic Matter Content: 50 percent of dry weight.
  - 2. Feedstock: Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated compostable mixed solid waste.
- B. Peat: Sphagnum peat moss, partially decomposed, finely divided or granular texture, with a pH range of 3.4 to 4.8.
- C. Peat: Finely divided or granular texture, with a pH range of 6 to 7.5, containing partially decomposed moss peat, native peat, or reed-sedge peat and having a water-absorbing capacity of 1100 to 2000 percent.
- D. Wood Derivatives: Decomposed, nitrogen-treated sawdust, ground bark, or wood waste; of uniform texture, free of chips, stones, sticks, soil or toxic materials.
  - 1. In lieu of decomposed wood derivatives, mix partially decomposed wood derivatives with at least 0.15 lb. of ammonium nitrate or 0.25 lb. of ammonium sulfate per cubic foot of loose sawdust or ground bark.
- E. Manure: Well-rotted, un-leached, stable or cattle manure containing not more than 25 percent by volume of straw, sawdust, or other bedding materials; free of toxic substances, stones, sticks, soil, weed seed, and material harmful to plant growth.

**2.6 PLANTING ACCESSORIES**

- A. Selective herbicides: EPA registered and approved, of type recommended by manufacturer for application.

**2.7 FERTILIZER**

- A. Superphosphate: Commercial, phosphate mixture, soluble; a minimum of 20 percent available phosphoric acid.
- B. Commercial Fertilizer: Commercial-grade complete fertilizer of neutral character, consisting of fast- and slow-release nitrogen, 50 percent derived from natural organic sources of ureaformaldehyde, phosphorous, and potassium in the following composition:
  - 1. Composition: 1 lb/1000 sq. ft. of actual nitrogen, 4 percent phosphorous, and 2 percent potassium, by weight.
  - 2. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing agency.
- C. Slow-Release Fertilizer: Granular or pelleted fertilizer consisting of 30 percent water-insoluble nitrogen, phosphorus, and potassium in the following composition:
  - 1. Composition: 25 percent nitrogen, 10 percent phosphorous, and 10 percent potassium, by weight.
  - 2. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing agency.

**2.8 MULCHES**

- A. Straw Mulch: Provide air-dry, clean, mildew-and seed-free, salt hay or threshed straw of wheat, rye, oats, or barley.
- B. Peat Mulch: Sphagnum peat moss, partially decomposed, finely divided or granular texture, with a pH range of 3.4 to 4.8.
- C. Peat Mulch: Finely divided or granular texture, with a pH range of 6 to 7.5, containing partially decomposed moss peat, native peat, or reed-sedge peat and having a water-absorbing capacity of 1100 to 2000 percent.

- D. Compost Mulch: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1-inch sieve; soluble salt content of 5 to 10 decisiemens/m; not to exceeding 0.5 percent inert contaminants a free of substances toxic to plantings; and as follows:
  - 1. Organic Matter Content: 50 percent of dry weight.
  - 2. Feedstock: Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated or compostable mixed solid waste.
- E. Fiber Mulch: Biodegradable, dyed-wood, cellulose-fiber mulch; nontoxic; free of plat-growth or germination inhibitors; with a maximum moisture content of 15 percent and a pH range of 4.5 to 6.5.
- F. Nonasphaltic Tackifier: Colloidal tackifier recommended by fiber-mulch manufacturer for slurry application; nontoxic and free of plant-growth or germination inhibitors.
- G. Asphalt Emulsion: ASTM D 977, Grade SS-1; nontoxic and free of plant-growth or germination inhibitors.

**2.9 EROSION-CONTROL MATERIALS**

- A. Erosion-Control Blankets: Biodegradable wood excelsior, straw, or coconut-fiber mat enclosed in a photodegradable plastic mesh. Include manufacturer's recommended steel wire staples, 6 inches long.
- B. Erosion-Control Fiber Mesh: Biodegradable twisted jute or spun-coir mesh, a minimum of 0.92 lb./sq. yd., with 50 to 65 percent open area. Include manufacturer's recommended steel wire staples, 6 inches long.

**2.10 PLANTING SOIL MIX**

- A. Planting Soil Mix: As specified on drawings.

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

- A. Examine areas to receive Turf and grass for compliance with requirements and other conditions affecting performance. Proceed with installation only after unsatisfactory conditions have been corrected.

**3.2 PREPARATION**

- A. Protect structures, utilities, sidewalks, pavements, and other facilities, trees, shrubs, and plantings from damage caused by planting operations. Reference tree planting schematic for exclusion of sod within tree planting well.
  - 1. Protect adjacent and adjoining areas from hydroseeding overspray.
- B. Provide erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.
- C. Stop all sod at the edge of the tree well.

**3.3 SOD PREPARATION**

- A. Limit Sod subgrade preparation to areas to be planted within forty eight hours. Installation of sod shall not be undertaken until adjacent site improvements and pavement is complete. No trucking or moving of equipment or materials will be permitted upon completed sod.
- B. All irrigation heads, valve boxers, drain valves and quick couplers shall be flagged prior to sodding operations.
- C. Newly Graded Subgrades: Loosen subgrade to a minimum depth of 6 inches. Remove stones larger than ¾ inch in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Owner's property.
  - 1. Apply fertilizer directly to finish grade, prior to sodding.
  - 2. Thoroughly blend planting soil mix before spreading or spread topsoil, apply soil amendments and fertilizer on surface, and thoroughly b lend planting soil mix.
    - a. Delay mixing fertilizer with planting soil if planting will not proceed within three days.

3. Spread planting soil mix to a depth of 4 inches, but not less than required to meet finish grades natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.
  - a. Spread approximately one-half the thickness of planting soil mix over loosened subgrade. Mix thoroughly into top 4 inches of subgrade. Spread remainder of planting soil mix.
- D. Unchanged Subgrades: If Turf is to be planted in areas unaltered or undisturbed by excavating, grading, or surface soil stripping operations, prepare surface soil as follows:
  1. Remove existing grass, vegetation, and turf. Do not mix into surface soil.
  2. Loosen surface soil to a depth of at least of 6 inches. Apply soil amendments and fertilizers according to planting soil mix proportions and mix thoroughly into top 4 inches of soil. Till soil to a homogeneous mixture of fine texture.
    - a. Apply fertilizer directly to finish grade, prior to sodding.
  3. Remove stones larger than ¾ inches in any dimension and sticks, roots, trash, and other extraneous matter.
  4. Legally dispose of waste material, including grass, vegetation, and turf, off Owner's property.
- E. Finish Grading: Finished grading and preparation of the entire sodded or seeded bed areas shall be achieved by disc-harrow or other approved method to a depth of six-inches (6"), or determined by Owner's Representative), fine ranking and/or light dragging until the surface is smooth, friable, and or uniform fine texture and compaction, having no lumps or stones over ¾" inch. No sod shall be laid on any area which has not been so prepared. Obtain the Owner's Representative's approval of prepared areas prior to sodding. A depth of one-inch (1") shall be maintained along sidewalk, before sod is installed.
- F. Finish grades shall be as indicated on the drawing, subject to minor adjustments, as may be directed by the Owner's Representative. Tops and toes of slopes shall be rounded, and the necessary swales for the run-off of surface water shall be carefully maintained with sufficient slope.
- G. Moisten prepared Sod areas before planting if soil is dry. Water thoroughly and allow surface to dry before planting. Do not create muddy soil.
- H. Restore areas if eroded or otherwise disturbed after finish grading and before planting.

### 3.4 SEEDING

- A. Sow seed with spreader or seeding machine. Do not broadcast or drop seed when wind velocity exceeds 5 mph. Evenly distribute seed by sowing equal quantities in two directions at right angles to each other.
  1. Do not use wet seed or seed that is moldy or otherwise damaged.
- B. Sow seed at the rate: As specified on drawings.
- C. Rake seed lightly into top 1/4 inch topsoil, roll lightly, and water with fine spray.
- D. Protect seeded areas with slopes exceeding 3:1 or greater with erosion-control blankets installed and stapled according to manufacturer's written instructions.
- E. Protect seeded areas with slopes not exceeding 3:1 by spreading straw mulch. Spread uniformly at a minimum rate of 2 tons/acre to form a continuous blanket 1-1/2 inches in loose depth over seeded areas. Spread by hand, blower, or other suitable equipment.
  1. Anchor straw mulch by crimping into topsoil with suitable mechanical equipment.
  2. Bond straw mulch by spraying with asphalt emulsion at the rate of 10 to 13 gal. /1000 sq. ft. Take precautions to prevent damage or staining of structures or other plantings adjacent to mulched areas. Immediately clean damaged or strained areas.

### 3.5 HYDROSEEDING

- A. Hydroseeding: Mix specified seed, fertilizer, and fiber mulch in water, using equipment specifically designed for hydroseed application. Continue mixing until uniformly blended into homogeneous slurry suitable for hydraulic application.
  1. Mix slurry with non-asphaltic tackifier.

2. Apply slurry uniformly to all areas to be seeded in a one-step process. Apply mulch at a minimum rate of 1500-lb/acre dry weight but not less than the rate required to obtain specified seed-sowing rate.

3. Apply slurry uniformly to all areas to be seeded in a two-step process. Apply first slurry application at a minimum rate of 500-lb/acre dry weight but not less than the rate required to obtain specified seed-sowing rate. Apply slurry cover coat of fiber mulch at a rate of 1000 lb./acre.

### **3.6 SODDING**

- A. Laying Sod: Lay sod within 24 hours of harvesting. Sod shall be laid on a firm moist bed with tight joints so that no voids occur under or between strips. All ends should be tucked and unrolled. Stagger sod strips or pads to offset joints in adjacent courses. Avoid damage to subgrade or sod during installation. Any depressions or mounds occurring after sodding shall be corrected prior to acceptance of work. No sod shall be laid on a frozen bed or installed on Fridays. No sod shall be laid within the tree planting well.
- B. Sod shall be blended Kentucky Bluegrass turf, approved by owner and supplied from a single approved source. Sod shall be one inch (1") minimum thick dense and free of weeds and stones. All sod shall be inspected and approved by the Owner's Representative at the time of delivery. Sod shall be sufficiently moist so that the soil will adhere to the roots when handled. Delivered sod shall contain no more than five (5) percent broken rolls. Sod that has become moldy, withered, or yellow from storage or drying, or does not meet minimum thickness requirements may be rejected at the time of planting. Sod out for more than 24 hours from the time of cutting shall not be used.
- C. As soon as sod has been laid, it shall be watered and rolled using a Jackson Sod Roller, True Temper Model 12LR with 240# of water approved equals, so that the sod makes a tight bond to the sod bed. Work sifted soil or fine sand into minor cracks between pieces of sod; remove excess to avoid smothering sod and adjacent grass.
1. Lay sod across angle of slopes exceeding 3:1.
  2. Anchor sod on slopes exceeding 4:1 with wood pegs or steel staples spaced as recommended by sod manufacturer but not less than 2 anchors per sod strip to prevent slippage.
- D. Saturate sod with fine water spray within two hours of planting. During first week, water daily or more frequently as necessary to maintain moist soil to a minimum depth of 1-1/2 inches below sod.

### **3.7 SOD RENOVATION**

- A. Renovate existing sod damaged by Contractor's operations, such as storage of materials or equipment and movement of vehicles.
1. Re-establish sod where settlement or washouts occur or where minor regrading is required.
- B. Remove sod and vegetation from diseased or unsatisfactory sod areas: do not bury in soil.
- C. Remove topsoil containing foreign materials resulting from Contractor's operations, including oil drippings, fuel spills, stone, gravel, and other construction materials, and replace with new topsoil.
- D. Mow, dethatch, core aerate, and rake existing turf.
- E. Remove weeds before seeding. Where weeds are extensive, apply selective herbicides as required. Do not use pre-emergence herbicides.
- F. Remove waste and foreign materials, including weeds, soil cores, grass, vegetation, and turf, and legally dispose of them off Owner's property.
- G. Till ripped, bare and compacted areas thoroughly to a soil depth of 6 inches.
- H. Apply soil amendments and initial fertilizers required for establishing new Turf and mix thoroughly into top 4 inches of existing soil. Provide new planting soil to fill low spots and meet finish grades.
- I. Apply sod as required for new Turf.
- J. Water newly planted areas and keep moist until new sod is established.

**3.8 SATISFACTORY TURF**

- A. Satisfactory Seeded Turf: At end of maintenance period, a healthy, uniform, close stand of grass has been established, free of weeds and surface irregularities. The maintenance period for this work shall begin immediately after all areas are seeded and shall continue in accordance with the following requirements.
- B. All seeded areas shall have suitable signs erected at important points, notifying the public to keep off. Minor vandalism or other damage to the seeded areas shall be the responsibility of the Contractor until all work receives Final Acceptance by the Owner's Representative. Major vandalism or damage caused by others through no fault of the Contractor or his subcontractor shall be brought to the attention of the Owner's Representative who will be the sole judge as to the extent of such damage. If such damage is deemed to be major by the Owner's Representative, any work necessary to repair the seeded area to an acceptable condition shall be paid for by the Owner under the provision of "extra work" stated in the General Conditions, if such work is authorized by the Owner's Representative.
- C. Acts of God: Minor damage to the seeded areas shall be the responsibility of the Contractor until all work receives Final Acceptance by the Owner's Representative. Major damage caused by flood, hail storm, wind or large rain storm, and through no fault of the Contractor to protect his work, shall immediately be brought to the attention of the Owner's Representative who will be the sole judge as to the extent of such damage. Major damage shall be repaired by the Contractor and paid for by the Owner, if such work is authorized by the Owner's Representative.
- D. The Contractor shall be responsible for watering and mowing the seeded areas only until Final Acceptance. Mowing shall be maintained at a height of three inches (3") and mowed only by equipment with sharp blades. Sod shall be mowed before grass reaches a height of four inches (4"). If grass exceeds four inches (4"). If grass exceeds four inches (4") in height before mowing, no more than (1/3) of top growth shall be cut off at any one time.
- E. Upon completion of all seeding operations, the Contractor will notify the Owner's Representative to inspect the work. Upon inspection, if all work is acceptable, the Owner's Representative shall record that date and shall issue a "Conditional Acceptance" letter which shall state that the Contractor shall maintain all seeded areas as specified according to the following length of time.
- F. Period of 60 calendar days minimum, which shall be referred to as the "Seeded Area Maintenance Period". At the end of this period, the seeded areas shall be given "Final Acceptance" if the seed has germinated and there are no bare areas larger than six (6) square inches. All bare areas larger than (6) square inches in diameter shall be re-seeded.
  - 1. At the end of the maintenance period, the Owner's Representative shall, within five (5) calendar days, inspect the work, and if the work is acceptable, he shall relieve the Contractor from further obligations for seeding work only. Final acceptance of seeding work may be given independently of final acceptance of all work under this contract.
- G. Satisfactory Sodded Turf: At the end of maintenance period, a healthy, well-rooted, even-colored, viable Sod has been established, free of weeds, open joints, bare areas, and surface irregularities.
- H. Re-establish Turf that does not comply with requirements and continue maintenance until Turf are satisfactory.

**3.9 NATIVE SEEDING**

- A. Method of Application: Refer to Detail Supplement or drawings.
- B. Do not broadcast or drop seed when wind velocity exceeds 5 mph. Evenly distribute seed by sowing equal quantities in two directions at right angles to each other.
  - 1. Do not use wet seed or seed that is moldy or otherwise damaged.
- C. Sowing rates vary with mix of species but are usually much lighter than turf grass seed application rates. Revise to suit Project.
- D. Sow seed at the net rate of 6 oz. /1000 sq. ft.
- E. Brush seed into top 1/16 inch of topsoil, roll lightly, and water with fine spray.

CITY OF COLORADO SPRINGS

- F. Protect seeded areas from hot, dry weather or drying winds by applying compost mulch within 24 hours after completing seeding operations. Soak and scatter uniformly to a depth of 3/16 inch and roll to a smooth surface.
- G. Water newly planted areas and keep moist until meadow is established.

**3.10 CLEANUP AND PROTECTION**

- A. Promptly remove soil and debris created by Sod work from paved areas. Clean wheels of vehicles before leaving site to avoid tracking soil onto roads, walks, or other paved areas.
- B. Erect barricades and warning signs as required to protect newly planted areas from traffic. Maintain barricades throughout maintenance period and remove after Sod is established. Remove Erosion-control measures after grass establishment period.

**END OF SECTION 02920 – SEEDING AND SODDING (REVISED 2013)**

## 02300 EARTHWORK

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. This section includes the following:
1. Surveying and grade staking.
  2. Preparing subgrades for slabs-on-grade, walks, pavements, turfs, and plantings.
  3. Excavating and backfilling for building and structures.
  4. Drainage course of slabs-on-grade.
  5. Subbase course for concrete walks and pavements. If indicated on drawings.
  6. Base course for asphalt paving.
  7. Subsurface drainage backfill for walls and trenches.
  8. Excavating and backfilling trenches within building lines.
  9. Excavating and backfilling trenches for buried mechanical and electrical utilities and pits for buried utility structures.
  10. Rough Grading
  11. Finish Grading
  12. Site clean up
  13. Specialty subgrade preparations for pond liners, artificial turf fields, and courts.
- B. Related Sections include the following:
1. Division 1 Section "Construction Facilities and Temporary Controls."
  2. Division 2 Section "Site Clearing" for site stripping, grubbing, removing topsoil, and protecting trees to remain.
  3. Division 2 Section "Tree Protection and Trimming" for protecting and trimming trees to remain.
  4. Division 2 Section "Landscaping" for finish grading, including placing and preparing topsoil for Turfs and plantings.

#### 1.3 UNIT PRICES

- A. Rock Measurement: Volume of rock actually removed, measured in original position, but not to exceed the following:
1. 24 inches outside of concrete forms other than at footings.
  2. 12 inches outside of concrete forms at footings.
  3. 6 inches outside of minimum required dimensions of concrete cast against grade.
  4. Outside dimensions of concrete walls indicated to be cast against rock with out forms or exterior waterproofing treatments.
  5. 6 inches beneath bottom of concrete slabs on grade.
  6. 6 inches beneath pipe in trenches, and the greater of 24 inches wider than pipe or 42 inches wide.
- B. Unit prices for rock excavation include replacement with approved materials.

#### 1.4 DEFINITIONS

- A. Backfill: Soil materials used to fill and excavation.
1. Initial Backfill: Backfill placed beside and over pipe in a trench, including haunches to support sides of pipe.
  2. Final Backfill: Backfill placed over initial backfill to fill a trench.
- B. Base Course: Layer placed between the subbase course and asphalt paving.
- C. Bedding Course: Layer placed over the excavated subgrade in a trench before laying pipe.
- D. Borrow: Satisfactory soil imported from off-site for use as fill or backfill.
- E. Drainage Course: Layer supporting slab-on-grade used to minimize capillary flow of pore water.

- F. Excavation: Removal of material encountered above subgrade elevations.
  - 1. Additional Excavation: Excavation below subgrade elevations as directed by Owner's Representative. Additional excavations and replacement material will be paid for according to Contract provisions for changes in the Work.
  - 2. Bulk Excavation: Excavations more than 10 feet in width and pits more than 30 feet in either length or width.
  - 3. Unauthorized Excavation: Excavation below subgrade elevations or beyond indicated dimensions without direction by Owner's Representative. Unauthorized excavation, as well as remedial work directed by Owner's Representative, shall be without additional compensation.
- G. Fill: Soil materials used to raise existing grades.
- H. Rock: Rock Material in beds, ledges, unstratified masses, and conglomerate deposits and boulders of rock material exceeding 1 cu. yd. for bulk excavation or  $\frac{3}{4}$  cu. yd. for footing, trench, and pit excavation that cannot be removed by rock excavating equipment equivalent to the following in size and performance ratings, without systematic drilling, ram hammering, ripping, or blasting, when permitted:
  - 1. Excavation of Footing, Trenches, and Pits: Late-model, track-mounted hydraulic excavator, equipped with a 42-inch wide, short-tip-radius rock bucket; rated at not less than 120-hp flywheel power with bucket-curling force of not less than 25,000 lbf and stick-crowd force of not less than 18,700 lbf; measured according to SAE J-1179.
  - 2. Bulk Excavation: Late-model, track-mounted loader; rated at not less than 210-hp flywheel power and developing a minimum of 45,000-lbf breakout force; measured according to SAE J-732.
- I. Rock: Rock material in beds, ledges, unstratified masses, and conglomerate deposits and boulders of rock material  $\frac{3}{4}$  cu. yd. or more in volume that when tested by an independent geotechnical testing agency, according to ASTM D 1586, exceeds a standard penetration resistance of 100 blows/2 inches.
- J. Scarify: Preparation of an existing grade or subgrade by uniformly and mechanically breaking up the soils to a predetermined depth.
- K. Structures: Buildings, footings, foundation, retaining walls, slabs, tanks, curbs, mechanical and electrical appurtenances, other man-made stationary features constructed above or below the ground surface.
- L. Subbase Course: Layer placed between the subgrade and base course for asphalt paving, or layer placed between the subgrade and a concrete pavement or walk.
- M. Subgrade: Surface or elevation remaining after completing excavation, or top surface of a fill or backfill immediately below subbase, drainage fill, or topsoil materials.
- N. Utilities include on-site underground pipes, conduits, ducts, and cables, as well as underground services within buildings.

## 1.5 SUBMITTALS

- A. Product Data: For the following:
  - 1. Each type of plastic warning tape.
  - 2. Drainage fabric.
  - 3. Separation fabric.
- B. Samples: For the following:
  - 1. 30-lb samples, sealed in airtight containers, of each proposed soil material from on-site or borrow sources.
  - 2. 12-by-12-inch sample of drainage fabric.
  - 3. 12-by-12-inch sample of separation fabric.
- C. Material Test Reports: From a qualified testing agency indicating and interpreting test results for compliance of the following with requirements indicated:
  - 1. Classification according to ASTM D 2487 of each on-site or borrow soil material proposed for fill and backfill.
  - 2. Laboratory compaction curve according to ASTM D 698 for each on-site or borrow soil material proposed for fill and backfill.

3. Laboratory compaction curve according to ASTM D 1557 for each on-site or borrow soil material proposed for fill and backfill.

D. Blasting plan approved by authorities having jurisdiction, for record purposes.

#### **1.6 QUALITY ASSURANCE**

A. Comply with applicable requirements of NFPA 495, "Explosive Materials Code."

B. Seismic Survey Agency: An independent testing agency, acceptable to authorities having jurisdiction, experienced in seismic surveys and blasting procedures to perform the following services:

1. Report types of explosive and sizes of charge to be used in each area of rock removal, types of blasting mats, sequence of blasting operations, and procedures that will prevent damage to site improvements and structures on Project site and adjacent properties.

2. Seismographic monitoring services during blasting operations.

C. Geotechnical Testing Agency Qualifications: An independent testing agency qualified according to ASTM E 329 to conduct soil materials and rock-definition testing, as documented according to ASTM D 3740 and ASTM E 548.

D. Pre-excavation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings."

#### **1.7 PROJECT CONDITIONS**

A. Existing Utilities: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted in writing by Owner's Representative and then only after arranging to provide temporary utility services according to requirements indicated:

1. Notify Owner's Representative not less than two working days in advance of proposed utility interruptions.

2. Do not proceed with utility interruptions without written permission from Owner's Representative.

3. Contact utility-locator services for area where Project is located, at least 48 hours prior to commencing excavating. Call 1-800-922-1987 for all utility locations, including TV cable.

B. Demolish and completely remove from site existing underground utilities indicated to be removed.

Coordinate with utility companies to shut off services if lines are active.

### **PART 2 - PRODUCTS**

#### **2.1 SOIL MATERIALS**

A. General: Provide borrow soil materials when sufficient satisfactory soil materials are not available from excavations.

B. Satisfactory Soils: ASTM D 2487 soil classification groups GW, GP, GM, SW, SP, and SM, or a combination of these group symbols; free of rock or gravel larger than 3 inches in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter.

C. Unsatisfactory Soils: ASTM D 2487 soil classification groups, MH, CH, OL, OH, and PT, or a combination of these group symbols.

D. Backfill and Fill: Satisfactory soil materials.

E. Subbase: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 90 percent passing a 1-1/2-inch sieve and not more than 12 percent passing a No. 200 sieve.

F. Base: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 95 percent passing a 3/4 inch sieve and not more than 8 percent passing a No. 200 sieve.

G. Engineered Fill: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 90 percent passing a 1-1/2-inch sieve and not more than 12 percent passing a No. 200 sieve.

H. Bedding: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand: ASTM D 2940; except with 100 percent passing a 1-inch sieve and not more than 8 percent passing a No. 200 sieve.

- I. Drainage Fill: Washed, uniformly graded mixture of crushed stone, or crushed or uncrushed gravel; ASTM D448; coarse-aggregate grading Size 57: with 100 percent passing a 1-1/2-inch sieve and 0 to 5 percent passing a No. 8 sieve.
- J. Filter Material: Uniformly graded mixture of natural or crushed gravel, or crushed stone and natural sand; ASTM D448; coarse-aggregate grading Size 67; with 100 percent passing a 1-inch sieve and 0 to 5 percent passing a No. 4 sieve.

## **2.2 ACCESSORIES**

- A. Warning Tape: Acid-and alkali-resistant polyethylene film warning tape manufactured for marking and identifying underground utilities, 6 inches wide and 4 mils thick, continuously inscribed with a description of the utility; colored as follows:
- B. Detectable Warning Tape: Acid-and alkali-resistant polyethylene film warning tape manufactured for marking and identifying underground utilities, minimum 6 inches wide and 4 mils thick continuously inscribed with a description of the utility, with metallic core encased in a protective jacket for corrosion protection, detectable by metal detector when tape is buried up to 30 inches deep; colored as follows:
  - 1. Red: Electric.
  - 2. Yellow: Gas, oil, steam, and dangerous materials.
  - 3. Orange: Telephone and other communications.
  - 4. Blue: Water systems.
  - 5. Green: Sewer systems.
- C. Drainage Fabric: Nonwoven geotextile, specifically manufactured as a drainage geotextile; made from polyolefins, polyesters, or polyamides; and with the following minimum properties determined according to ASTM D4759 and referenced standard test methods:
  - 1. Grab Tensile Strength: 120 lbf; ASTM D 4632.
  - 2. Tear Strength: 50 lbf; ASTM D 4533
  - 3. Puncture Resistance: 70 lbf; ASTM D4833
  - 4. Water Flow Rate: 135 gpm per sq. ft.; ASTM D 4491.
  - 5. Apparent Opening Size: No. 70; ASTM D4751
- D. Separation Fabric: Woven geotextile, specifically manufactured for use as a separation geotextile; made from polyolefins, polyesters, or polyamides; and with the following minimum properties determined according to ASTM D4759 and referenced standard test methods.
  - 1. Grab Tensile Strength: 200 lbf; ASTM D 4632
  - 2. Tear Strength: 75 lbf; ASTM D 4533.
  - 3. Puncture Resistance: 90 lbf; ASTM D 4833.
  - 4. Water Flow Rate: 4 gpm per sq. ft.; ASTM D 4491.
  - 5. Apparent Opening Size: No. 30; ASTM D 4751.

## **PART 3 - EXECUTION**

### **3.1 PREPARTION**

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by earthwork operations.
- B. Protect subgrades and foundation soils against freezing temperatures or frost. Provide protective insulating materials as necessary.
- C. Provide erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.

### **3.2 DE-WATERING**

- A. Prevent surface water and ground water from entering excavations, from ponding on prepared subgrades, and from flooding Project site and surrounding area.
- B. Protect subgrades from softening, undermining, washout, and damage by rain or water accumulation.
  - 1. Obtain de-watering permit if required.

2. Reroute surface water runoff away from excavation areas. Do not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches.
3. Install a de-watering system to keep subgrades dry and convey ground water away from excavations. Maintain until de-watering is no longer required.

### **3.3 EXPLOSIVES**

- A. Explosives: Obtain written permission from authorities having jurisdiction before bringing explosives to Project site or using explosives on Project site.
1. Do not damage adjacent structures, property, or site improvements or weaken the bearing capacity of rock subgrade when using explosives.

### **3.4 SURVEYING AND GRADE STAKING**

- A. Before earthwork operations are started, the site shall be completely staked out by the Contractor for the work of this section for the approval of the Owner's Representative. Surveying and staking is to be done by a City approved licensed surveyor.
- B. Grade stakes shall be set where spot elevations are shown on drawings as well as breaks in grade, along drainage swales and as otherwise required, to complete the work of this section to the elevations shown on the drawings or as modified in the field by the Owner's Representative.
- C. Maintain all benchmarks and other reference points; if disturbed or destroyed, notify the Owner's Representative and replace as directed.
- D. All surveys to consist of (50') foot grids with spot elevations unless otherwise specified. E. Rough Grade: Refer to Section 3.17 Rough Grading.
- F. Blue Tops: Refer to Section 3.19 Blue Topping.

### **3.5 EXCAVATION, GENERAL**

- A. Unclassified Excavation: Excavation to subgrade elevations regardless of the character of surface and subsurface conditions encountered, including rock, soil materials, and obstructions.
1. If excavated materials intended for fill and backfill include unsatisfactory soil materials and rock, replace with satisfactory soil materials.
- B. Classified Excavation: Excavation to subgrade elevations classified as earth and rock. Rock excavation will be paid for by adjusting the Contract Sum according to unit prices included in the Contract Documents.
1. Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, and other items indicated to be removed; together with soil, boulders, and other materials not classified as rock or unauthorized excavation.
    - a. Intermittent drilling; blasting, if permitted; ram hammering; or ripping of material not classified as rock excavation is earth excavation.
  2. Rock excavation includes removal and disposal of rock.
    - a. Do not excavate rock until it has been classified and cross-sectioned by Owner's Representative.
- C. Protection, Shoring and Bracing.
1. In the event that existing utilities, structures, or underground water is encountered or exposed during the execution of this work, the Contractor shall notify the Owner's Representative immediately for procedures to follow.
  2. Install and maintain shoring, bracing and safety fencing or safety tape as required to keep structures, sidewalks, drives and streets safe to life, limb and property at all time. Provide shoring and bracing as required to stabilize earth slopes.
  3. Provide necessary decking, guards, fences, or planking to maintain safe pedestrian and vehicular traffic on and adjacent to the site.
  4. Keep public streets and existing paved areas clean at all times.

### **3.6 EXCAVATION FOR STRUCTURES**

- A. Excavate to indicated elevations and dimensions within a tolerance of plus or minus 1 inch. Extend excavations a sufficient distance from structures for placing and removing concrete form work, for installing services and other construction, and for inspections.

1. Excavations for footing and Foundations: Do not disturb bottom of excavation. Excavate by hand to final grade just before placing concrete reinforcement. Trim bottoms to required lines and grades to leave solid base to receive other work.
2. Pile Foundations: Stop excavations from 6 to 12 inches above bottom of pile cap before piles are placed. After piles have been driven, remove loose and displaced material. Excavate to final grade, leaving solid base to receive concrete pile caps.
3. Excavation for Underground Tanks, Basins, and Mechanical or Electrical Utility Structures: Excavate to elevations and dimensions indicated within a tolerance of plus or minus 1 inch. Do not disturb bottom of excavations intended for bearing surface.
4. Compliance with City of Colorado Springs grading and erosion control plan as per drainage criteria manual, (manual can be obtained from the City of Colorado Springs Engineering Division).

**3.7 EXCAVATION FOR POND LINERS, COURTS, ARTIFICIAL TURF FIELDS, WALKS AND PAVEMENTS**

- A. Excavate surfaces under pond liners, courts, artificial turf fields, walks and pavements to indicated cross sections, elevations, and grades.

**3.8 EXCAVATION FOR UTILITY TRENCHES**

- A. Excavate trenches to indicated gradients, lines, depths, and elevations.
1. Beyond building perimeter, excavate trenches to allow installation of tops of pipe in accordance with local requirements.
- B. Excavate trenches to uniform widths to provide a working clearance on each side of pipe or conduit. Excavate trench walls vertically from trench bottom to 12 inches higher than top of pipe or conduit, unless otherwise indicated.
1. Clearance: 12 inches on each side of pipe or conduit.
  2. Clearance: As indicated.
- C. Trench Bottoms: Excavate and shape trench bottoms to provide uniform bearing and support of pipes and conduit. Shape subgrade to provide continuous support for bells, joints, and barrels of pipes and for joints, fittings, and bodies of conduits. Remove projecting stones and sharp objects along trench subgrade.
1. For pipes and conduit less than 6 inches in nominal diameter and flat-bottomed, multiple-duct conduit units, hand-excavate trench bottoms and support pipe and conduit on an undisturbed subgrade.
  2. For pipes and conduit 6 inches or larger in nominal diameter, shape bottom of trench to support bottom 90 degrees of pipe circumference. Fill depressions with tamped sand backfill.
  3. Excavate trenches 6 inches deeper than elevation required in rock or other unyielding bearing material to allow for bedding course.
- D. Trench Bottoms: Excavate trenches 4 inches deeper than bottom of pipe elevation to allow for bedding course. Hand excavate for bell of pipe.
1. Excavate trenches 6 inches deeper than elevation required in rock or other unyielding bearing material to allow for bedding course.

**3.9 APPROVAL OF SUBGRADE**

- A. Notify Owner's Representative when excavations have reached required subgrade.
- B. If Owner's Representative determines that unsatisfactory soil is present, continue excavation and replace with compacted backfill or fill material as directed.
1. Additional excavation and replacement material will be paid for according to Contract provisions for changes in the Work.
- C. Proof roll subgrade with heavy pneumatic-tired equipment to identify soft pockets and areas of excess yielding. Do not proof roll wet or saturated subgrades.
- D. Reconstruct subgrades damaged by freezing temperatures, frost, rain, accumulator water, or construction activities, as directed by Owner's Representative.

**3.10 UNAUTHORIZED EXCAVATION**

- A. Fill unauthorized excavation under foundations or wall footings by extending bottom elevation of concrete foundation or footings by extending bottom, without altering top elevation. Lean concrete fill may be used when approved by Owner's Representative.
1. Fill unauthorized excavations under other construction or utility pipe as directed by Owner's Representative.

**3.11 STORAGE OF SOIL MATERIALS**

- A. Stockpile borrow materials and satisfactory excavated soil materials. Stockpile soil materials without intermixing. Place, grade, and shape stockpiles to drain surface water. Conform to fugitive dust permit.
1. Stockpile soil materials away from edge of excavations. Do not store within drip line of remaining trees.

**3.12 BACKFILL**

- A. Place and compact backfill excavations promptly, but not before completing the following:
1. Construction below finish grade including, where applicable, damproofing, waterproofing, and perimeter insulation.
  2. Surveying locations of underground utilities for record documents.
  3. Inspecting and testing underground utilities.
  4. Removing concrete formwork.
  5. Removing trash and debris.
  6. Removing temporary shoring and bracing, and sheeting.
  7. Installing permanent or temporary horizontal bracing on horizontally supported walls.

**3.13 UTILITY TRENCH BACKFILL**

- A. Place and compact bedding course on trench bottoms and where indicated. Shape bedding course to provide continuous support for bells, joints, and barrels of pipes and for joints, fittings, and bodies of conduits.
- B. Backfill trenches excavated under footings and within 18 inches of bottom of footings; fill with concrete to elevation of bottom of footings.
- C. Place compact initial backfill of subbase material, free of particles larger than 1 inch, to a height of 12 inches over the utility pipe or conduit.
1. Carefully compact material under pipe haunches and bring backfill evenly up on both sides and along the full length of utility piping or conduit to avoid damage or displacement of utility system.
- D. Coordinate backfilling with utilities testing.
- E. Fill voids with approved backfill materials while shoring and bracing, and as sheeting is removed.
- F. Place and compact final backfill of satisfactory soil material to final subgrade.
- G. Install warning tape directly above utilities, 12 inches below finished grade, except 6 inches below subgrade under pavements and slabs.

**3.14 FILL**

- A. Preparation: In areas requiring fill, all stripping operations shall be completed before backfilling has begun. Place fill and backfill on reasonably dry soil. No fill shall be placed on wet ground. Fill shall be laced in eight inch (8") lifts in compacted depth under pavements or concrete and ten inch (10") lifts compacted depth under planted, turfed or other areas. Each layer shall be compacted to a firm surface by sheepfoot rollers or pneumatic rollers. Fill and backfill shall be compacted to 85% density under areas to be turned or planted and 95% density under all pavements and improvements. Density tests shall be modified Proctor Test taken at optimum moisture content.
- B. Plow, scarify, bench, or break up sloped surfaces steeper than 1 vertical to 4 horizontal so fill material will bond with existing material.
- C. Place and compact fill material in layers to required elevations as follows:
1. Under grass and planted areas, use satisfactory soil material, in no more than 10" lifts.

2. Under walks and pavements, use satisfactory soil material, in no more than 8" lifts.
  3. Under steps and ramps, use engineered fill.
  4. Under building slabs, use engineered fill.
  5. Under footing and foundations, use engineered fill.
- D. Place and compact bedding course on trench bottoms and where indicated. Shape bedding course to provide continuous support for bells, joints, and barrels of pipes and for joints, fittings, and bodies of conduits.

**3.15 MOISTURE CONTROL**

- A. Uniformly moisten or aerate subgrade and each subsequent fill or backfill layer before compaction to within 2 percent of optimum moisture content.
1. Do not place backfill of fill material on surfaces that are muddy, frozen, or contain frost or ice.
  2. Remove and replace, or scarify and air-dry, otherwise satisfactory soil material that exceeds optimum moisture content by 2 percent and is too wet to compact to specified dry unit weight.

**3.16 COMPACTION OF BACKFILLS AND FILLS**

- A. Place backfill and fill materials in layers not more than 8 inches in loose depth for material compacted by heavy compaction equipment, and not more than 4 inches in loose depth for material compacted by hand-operated tampers.
- B. Place backfill and fill materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure.
- C. Compact soil to not less than the following percentages of maximum dry unit weight according ASTM D 1557:
- D. Compact soil to not less than the following percentages of maximum dry unit weight according to ASTM D 698:
1. Under structures, building slabs, steps, and pavements, scarify and recompact top 12 inches of existing subgrade and each layer of backfill or fill material at 95 percent.
  2. Under walkways, scarify and recompact top 6 inches below subgrade and compact each layer of backfill or fill material at 92 percent.
  3. Under Turf or unpaved areas, scarify and recompact top 6 inches below subgrade and compact each layer of backfill or fill material at 85 percent.

**3.17 ROUGH GRADING**

- A. General: Uniformly grade all areas covered by the project, including excavated and fill sections. The finished surface shall be smooth, within a 1/10 of a foot compacted and free from irregular surface changes. The degree of finish shall be that ordinarily obtainable from blade grade operations. The final surface shall be not more than (.1) feet above or below the established grade or approved cross section.
1. Provide a smooth transition between adjacent existing grades and new grades.
  2. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
- B. Site Grading: Slope grades to direct water away from buildings and to prevent ponding. Finish subgrades to required elevations within the following tolerances:
1. Turf or Unpaved Areas: Plus or minus 1/10 of an inch.
  2. Walks: Plus or minus 1/10 of an inch.
  3. Pavements: Plus or minus 1/2 inch.
- C. Grading inside Building Lines: Finish subgrade to a tolerance of 1/2 inch when tested with a 10-foot straightedge.
- D. Contractor to provide survey to verify grades, to include swales, to satisfaction of Owner's Representative.
- E. The Owner's Representative shall approve final rough grade, prior to Contractor proceeding with any permanent site improvements.

**3.18 FINISH GRADING**

- A. Upon completion of construction, all areas which have been excavated, filled, or otherwise disturbed shall be covered with earth to a depth required to bring finished grade to the elevation indicated on drawings. This shall include the depth of topsoil.
- B. Topsoil shall be placed to provide a minimum depth of four inches (4") in all areas to receive, sod or as otherwise indicated.
- C. Topsoil shall be graded and dragged to prevent irregularities and depressions in which water will be retained.

**3.19 BLUE TOPPING**

- A. Provide blue top staking at 50 foot grids in all disturbed areas to receive imported topsoil and sodded turfgrass, to be done for all areas 5% or less, as well as under all areas to receive asphalt pavement.

**3.20 SUBSURFACE DRAINAGE**

- A. Drainage Piping: Drainage pipe is specified in Division 2 Section "Foundation Drainage Systems." B. Subsurface Drain: Place a layer of drainage fabric around perimeter of drainage trench as indicated. Place a 6-inch course of filter material on drainage fabric to support drainage pipe. Encase drainage pipe in a minimum of 12 inches of filter material and wrap in drainage fabric, overlapping sides and ends at least 6 inches.
  - 1. Compact each course of filter material to 95 percent of maximum dry unit weight according to ASTM D 698.
- C. Drainage Backfill: Place and compact filter material over subsurface drain, in width indicated, to within 12 inches of final subgrade. Overlay drainage backfill with one layer of drainage fabric, overlapping sides and ends at least 6 inches.
  - 1. Compact each course of filter material to 95 percent of maximum dry density according to ASTM D 698.
  - 2. Place and compact impervious fill material over drainage backfill to final subgrade.

**3.21 SUBBASE AND BASE COURSES**

- A. Under pavements and walks, place subbase course on prepared subgrade and as follows: If indicated on drawings.
  - 1. Place base course material over subbase.
  - 2. Compact sub base and base courses at optimum moisture content to required grades, lines, cross sections, and thickness to not less than 95 percent of maximum dry unit weight according to ASTM D 1557.
  - 3. Shape subbase and base to required crown elevations and cross-slope grades.
  - 4. When thickness of compacted subbase or base course is 6 inches or less, place materials in a single layer.
  - 5. When thickness of compacted subbase or base course exceeds 6 inches, place materials in equal layers, with no layer more than 6 inches thick or less than 3 inches thick when compacted.
- B. Pavement Shoulders: Place shoulders along edges of subbase and base course to prevent lateral movement. Construct shoulders, at least 12 inches wide, of satisfactory soil materials and compact simultaneously with each subbase and base layer to not less than 95 percent of maximum dry unit weight according to ASTM D 1557.

**3.22 DRAINAGE COURSE**

- A. Under slabs-on-grade, place drainage course on prepared subgrade and as follows:
  - 1. Compact drainage course to required cross sections and thickness to not less than 95 percent of maximum dry unit weight according to ASTM D 698.
  - 2. When compacted thickness of drainage course is 6 inches or less, place materials in a single layer.
  - 3. When compacted thickness of drainage course exceeds 6 inches, place materials in equal layers, with no layer more that 6 inches thick or less than 3 inches thick when compacted.

**3.23 FIELD QUALITY CONTROL**

- A. Testing Agency: Owner will engage a qualified independent geotechnical engineering testing agency to perform field quality-control testing. A sufficient number of density tests of the backfill and subgrade may be ordered by the Owner's Representative to determine that the backfill and subgrade complies with the appropriate Subsection of this Section.
- B. Allow testing agency to inspect and test subgrades and each fill or backfill layer. Proceed with subsequent earthwork only after test results for previously completed work comply with requirements.
- C. Footing Subgrade: At footing subgrades, at least one test of each soil stratum will be performed to verify design bearing capacities. Subsequent verification and approval of other footing subgrades may be based on a visual comparison of subgrade with tested subgrade when approved by Owner's Representative.
- D. Testing agency with test compaction of soils in place according to ASTM D 1556, ASTM D 2167, ASTM D 2992, and ASTM D 2937, as applicable. Tests will be performed at the following locations and frequencies:
  - 1. Paved and Building Slab Areas: At subgrade and at each compacted fill and backfill layer, at least one test for every 2000 sp. ft. or less of paved area or building slab, but in no case fewer than three tests.
  - 2. Foundation Wall Backfill: At each compacted backfill layer, at least one test for each 100 feet or less of wall length, but no fewer than two tests.
  - 3. Trench Backfill: At each compacted initial and final backfill layer, at least one test for each 150 feet or less of trench length, but no fewer than two tests.
- E. When testing agency reports that subgrades, fills, or backfills have not achieved degree of compaction specified, scarify and moisten or aerate, or remove and replace soil to depth required; re-compact and retest until specified compaction is obtained. These tests shall be made by an approved testing laboratory and paid for by the City on a first time basis only.
- F. Owner's Representative shall approve final rough grade.

**3.24 PROTECTION**

- A. Protecting Graded Areas: Protect newly graded areas from traffic, freezing, and erosion. Keep free of trash and debris.
- B. Repair and reestablish grades to specified tolerances where completed or partially completed surfaces become eroded, rutted, settled, or where they lose compaction due to subsequent construction operations or weather conditions.
  - 1. Scarify or remove and replace soil material to depth as directed by Owner's Representative; reshape and re-compact.
- C. Where settling occurs before contract period elapses, remove finished surfacing, backfill with additional soil material, compact, and reconstruct surfacing.
  - 1. Restore appearance, quality, and condition of finished surfacing to match adjacent work, and eliminate evidence of restoration to the greatest extent possible.

**3.25 DISPOSAL OF SURPLUS AND WASTE MATERIALS**

- A. Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Owner's property. All associated costs and fees will be the responsibility of the contractor.
- B. Transport surplus satisfactory soil to designated storage areas on Owner's property. Stockpile or spread soil as directed by Owner's Representative.

**3.26 SCARIFY EXISTING GRADE AND SUBGRADE**

- A. Prepare an existing grade or subgrade by uniformly and mechanically breaking up the soils to the depth shown on the construction plans, geotechnical report, or as directed by the owner's representative.
- B. Testing of the subgrade moisture content will be at the discretion and direction of the owner's representative. The moisture content will be adjusted to 2% of the optimum prior to final grade and compaction.

**CITY OF COLORADO SPRINGS**

- C. The subgrade will be compacted to compliance with the recommendations of the geotechnical report, construction plans, and City of Colorado Springs Engineering Standards.
- D. Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Owner's property. All associated costs and fees will be the responsibility of the contractor.
- E. Transport surplus satisfactory soil to designated storage areas on Owner's property. Stockpile or spread soil as directed by Owner's Representative.

**END OF SECTION 02300 EARTHWORK**

**02751- CEMENT CONCRETE PAVEMENT**

**PART 1 - GENERAL**

**1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. This Section includes exterior cement concrete pavement for the following;
  - 1. Driveways and roadways.
  - 2. Parking lots.
  - 3. Curbs and gutters.
  - 4. Walkways and all other flatwork.
- B. Related Sections include the following;
  - 1. Division 2 Section "Earthwork" for subgrade preparation, grading, and subbase course.
  - 2. Division 2 Section "Pavement for Joint Sealants" for joint sealants within concrete pavement and at isolation joints of concrete pavement with adjacent construction.

**1.3 DEFINITIONS**

- A. Cementitious Materials; Portland Cement shall conform to the specifications for Portland Cement 9ASTM C-150) and specifications for air-entrained Portland Cement (ASTM C-175 or C-595) and shall be Type IIA (Air-Entraining) cement, unless sulfate conditions allow otherwise. Table 2.2.3 in Chapter 2.2 of ACI 201 presents cement recommendations for sulfate resistances. In addition to the standard chemical requirements for Portland cement in ASTM C-150, the maximum percent of alkalis shall be as specified in Table 2 of ASTM C-150 for low alkali cement. Other types of cement or admixtures are only to be used upon approval by the Owner's Representative.

**1.4 SUBMITTALS**

- A. Product Data: For each type of manufactured material and product indicated.
- B. Design Mixes: For each concrete pavement mix. Include alternate mix designs when characteristics of materials, project conditions, weather, test results, or other circumstances warrant adjustments.
- C. Samples: 10-lb sample of exposed aggregate.
- D. Material Test Reports: From a qualified testing agency indicating and interpreting test results for compliance of the following with requirements indicated, based on comprehensive testing of current materials:
- E. Material Certificates: Signed by manufacturers certifying that each of the following materials complies with requirements;
  - 1. Cementitious materials and aggregates.
  - 2. Steel reinforcement and reinforcement accessories.
  - 3. Fiber reinforcement.
  - 4. Admixtures.
  - 5. Curing Compounds.
  - 6. Applied finish materials.
  - 7. Bonding agent or adhesive.
  - 8. Joint fillers.
- F. Minutes of pre-installation conference submitted by Contractor.

**1.5 QUALITY ASSURANCE**

- A. Installer Qualifications: an experienced installer who has completed pavement work similar in materials, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.

- B. Manufacturer Qualifications: Manufacturer of ready-mixed concrete products complying with ASTM C94 requirements for production facilities and equipment.
  - 1. Manufacturer must be certified according to the National Ready Mix Concrete Association's Plant Certification Program.
- C. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, qualified according to ASTM C1077 and ASTM E 329 to conduct the testing indicated, as documented according to ASTM E 548.
- D. Source Limitations: Obtain each type or class of cementitious Material of the same brand from the same manufacturer's plant and each aggregate from one source.
- E. ACI Publications: Comply with ACI 301, "Specification for Structural Concrete," unless modified by the requirements of the Contract Documents.
- F. Concrete Testing Service: Engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixes.
- G. Mockups: Cast mockups of full-size sections of concrete pavement to demonstrate typical joints, surface finish, texture, color, and standard of workmanship.
  - 1. Build mockups in the location and of the size indicated or, if not indicated, as directed by Owner's Representative.
  - 2. Notify Owner's Representative three days in advance of dates and times when mockups will be constructed.
  - 3. Obtain Owner's Representative approval of mockups before starting construction.
  - 4. Maintain approved mockups during construction in an undisturbed condition as a standard for judging the completed pavement.
  - 5. Demolish and remove approved mockups from the site when directed by Owner's Representative.
  - 6. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.
- H. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division I Section "Project Meetings."
  - 1. Before submitting design mixes, review concrete pavement mix design and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with concrete pavement to attend, including the following:
    - a. Contractor's superintendent.
    - b. Ready-mix concrete producer.
    - c. Concrete subcontractor.

**1.6 PROJECT CONDITIONS**

- A. Traffic Control: Maintain access for vehicular and pedestrian traffic as required for other construction activities.

**PART 2 – PRODUCTS**

**2.1 FORMS**

- A. Form Materials: Plywood, metal, metal-framed plywood, or other approved panel-type materials to provide full-depth, continuous, straight, smooth exposed surfaces.
  - 1. Use flexible or curved forms for curves of a radius 100 feet or less.
- B. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces.
- C. Forms for concrete shall be used for all vertical surfaces, mortar type, true to required lines and grades, and of sufficient strength to maintain shape during the placing of the concrete and the mechanical finishing without springing or settling. Wood forms shall be two inch (2") (nominal) surfaced plant; metal forms shall be approved section and shall have a flat surface on the top of not less than one and three-quarter inches (1-3/4"). Forms shall be thoroughly cleaned of all dirt, mortar, and foreign matter before being used. Unit lengths of forms shall be jointed in advance of the point of placing concrete. Flexible, curved or wood forms of the proper radii shall be used for curbs having a radius of less than One hundred feet (100'). All

forms shall have dimensions of the City of Colorado Springs specified curb and gutter sections.

- D. Forms shall be equipped with not less than three (3) staking points per each ten feet (10') of length with means for securely locking the form to each stake. Flange braces and staking pockets shall extend outward on the base not less than two-thirds (2/3) of the height of the form. Forms that are bent, twisted, warped, broken, or forms that have battered or splintered top faces shall be removed from the job. Repaired forms shall not be used until they have been inspected and approved by the owner's Representative. The top and face of a form shall not vary from a true plane by more than one-fourth inch (1/4") in ten feet (10'). Forms shall be cleaned and oiled before concrete is placed against them. The alignment and grade of forms shall be checked and approved immediately before placing the concrete.

**2.2 STEEL REINFORCEMENT**

- A. Plain-Steel Welded Wire Fabric: ASTM A 185, fabricated from as-drawn steel wire into flat sheets.
- B. Deformed-Steel Welded Wire Fabric: ASTM A 497, flat sheet.
- C. Epoxy-Coated Welded Wire Fabric: ASTM A 884/A 884M, Class A, plain steel. D. Reinforcement Bars: ASTM A 615/A 615M, Grade 60, deformed.
- E. Epoxy-Coated Reinforcement Bars: ASTM A 775/A 775M; with ASTM A 615/A 615M, Grade 60, deformed bars.
- F. Steel Bar Mats: ASTM A 184/A 184M; with ASTM A 615/A 615M, Grade 60, deformed bars; assembled with clips.
- G. Plain Steel Wire: ASTM A 82, as drawn.
- H. Epoxy-Coated Wire: ASTM A 884/A 884M, Class A coated, plain steel.
- I. Joint Dowel Bars: Plain steel bars, ASTM A 615/A 615M, Grade 60. Cut bars true to length with ends square and free of burrs.
- J. Epoxy-Coated Joint Dowel Bars: ASTM A 775/A 775M; with ASTM A 615/A 615M, Grade 60, plain steel bars.
- K. Tie Bars: ASTM A 615/A 615M, Grade 60, deformed.
- L. Hook Bolts: ASTM A 307, Grade A, internally and externally threaded. Design hook-bolt joint assembly to hold coupling against pavement form and in position during concreting operations, and to permit removal without damage to concrete or hook bolt.
- M. Bar Supports: Bolsters, chairs spacers, and other devices for spacing, supporting, and fastening reinforcement bars, welded wire fabric, and dowels in place. Manufacture bar supports according to CRSI's "Manual of Standard Practice" from steel wire, plastic, or precast concrete or fiber- reinforced concrete of greater compressive strength than concrete, and as follows:
  1. Equip wire bar supports with sand plates or horizontal runners where base materials will not support chair legs.
  2. For epoxy-coated reinforcement, use epoxy-coated or other dielectric-polymer coated wire bar supports.
- N. Epoxy Repair Coating: Liquid two-part epoxy repair coating, compatible with epoxy coating on reinforcement.

**2.3 CONCRETE MATERIALS**

- A. The amounts and proportions of fine and coarse aggregates shall be such as to produce a plastic, workable mix which can be readily placed into the corners and angles of the forms and around reinforcement and other embedded fixtures without undue accumulation of water or laitance on the surface, and such that there will be no honeycombing in the structure. Proportions of fine and coarse aggregates shall be such that the ratio of the coarse to the fine aggregate shall not be less than one (1) nor more than two (2).
- B. If in the judgment of the Owner's Representative, based on laboratory tests, concrete aggregates from a given source are detrimentally reactive with alkalies in Portland Cement, they shall be used in concrete in combination with low-alkali cement only.
- C. Concrete aggregates shall consist of sand-gravel, gravel, crushed stone, or limestone; the particles shall be clean, hard, tough, durable, of uniform quality, free of any soft, thin,

**CITY OF COLORADO SPRINGS**

or elongated pieces, disintegrated stone, dirt, organic or other injurious materials occurring either free or as a coating. All aggregate must be supplied from a source approved by the Owner's Representative. Aggregate shall be made of the following sub sections:

- D. Fine Aggregate: Fine aggregate shall conform to ASTM C-33. Fine aggregate shall consist of sand or other inert materials, or combinations thereof approved by the Owner's Representative, and having hard, strong, durable particles, free from adherent coating. Fine aggregate shall be thoroughly washed to remove shale, coal, mica, clay, loam, alkali, organic matter or other deleterious matter.

1. Deleterious Substances. The amount of deleterious substances in the washed aggregate shall not exceed the following values:

- a. Clay Lumps & Friable Particles, % by weight 3.0 MAX.
- b. Coal & Lignite, % by weight 1.0 MAX.
- c. Friable Particles, % by weight 1.0 MAX.
- d. Sand Equivalent 75 MIN.
- e. Fineness Modulus 2.3-3.1 MAX.
- f. Sodium Sulfate Soundness, % by weight 10 MAX.

2. Grading. Fine aggregate shall be regularly graded from coarse to fine in two (2) sizes and when tested by means of the U.S. Standard, sieves shall conform to the following requirements expressed as percentages by weight:

Sieve Size or Test Procedure	Percent Passing or Requirement	Test
3/8"	100	
No. 4	95-00	
No. 8	80-00	
No. 16	50-85	
No. 30	25-60	
No. 50	5-30	
No. 100	0-10	
No. 200	**0-3	

\*\*The fine aggregate shall have not more than 45% passing any sieve and retained on the next consecutive sieve.

- E. Coarse Aggregate. Gravel and crushed stone shall conform to ASTM C-33. Coarse aggregate shall consist of gravel, crushed stone, or other inert material or combinations thereof approved by the Owner's Representative, and having hard, strong, durable pieces free from adherent coating. Coarse aggregate shall be thoroughly washed of clay, loam, bark, sticks, alkali, organic matter, shale, coal, mica, or other deleterious material.

1. Deleterious Substances. The amount of deleterious substances shall not exceed the following values:

- a. Clay Lumps & Friable Particles, % by weight 3.0 MAX
- b. Coal & Lignites, % by weight .5 MAX
- c. Sum of Clay Lumps, Friable Particles and 5.0 MAX
- d. Chert, % by weight 50 MAX
- e. Abrasion, % by weight 50 MAX
- f. Sodium Sulfate Soundness, % by weight 12 MAX

Wood waste is defined as all material which, after drying to constant weight, has a specific gravity less than 1.0.

2. Grading. Coarse aggregate, when tested in conformity with ASTM C-136 shall conform to one or more of the following gradings as called for elsewhere in the specifications, special provisions or on the plans.

**CITY OF COLORADO SPRINGS**

Sieve size or Test Procedure	Percent Passing or Test Requirement		
------------------------------	-------------------------------------	--	--

	No. 357	No. 467	No. 57
2 1/2"	100	---	---
2"	95-100	100	---
1 1/2"	---	95-100	100
1"	35-70	---	95-100
3/4"	---	35-70	---
1/2"	10-30	---	25-60
3/8"	---	10-30	---
No. 4	0-5	0-5	0-10
No. 8	---	---	0-5
No. 200	*1.0 MAX	*1.0 MAX	*1.0 MAX

\*1.5 MAX for crusher fines

NOTE: Size No. 67 may also be used on a case-by-case basis when approved by the Owner's Representative. The above values are in percentages by weight from AASHTO M-80 No. 357 and 467. Other gradations may be used when specified by the Owner's Representative.

- F. Concrete Strength. Concrete made from the coarse aggregate, graded to comply with the requirements of these specifications, combined with the specified proportions of cement and the fine aggregate proposed for use with the coarse aggregate shall develop a compressive strength at the age of 28 days of not less than 4000 psi.
- G. Water. Water used in concrete shall be potable, clean, and free from deleterious amounts of acids, alkalis, or any organic materials.
- H. Exposed Aggregate. Selected, hard, and durable; washed; free of material that reacts with cementitious material or causes staining; from a single source, with gap graded coarse aggregate as follows:
  1. Aggregate Sizes: 3/4 to 1 inch nominal.
  2. Aggregate Sizes: 1/2 to 3/4 inch nominal.
  3. Aggregate Sizes: 3/8 to 5/8 inch nominal.

**2.4 ADMIXTURES**

- A. General: Admixtures certified by manufacturer to contain not more than 0.1 percent water-soluble chloride ions by mass of cement and to be compatible with other admixtures. Calcium Chloride shall not be used as an antifreeze agent. Calcium Chloride as an accelerating agent in amounts not to exceed 1.5% by weight of cement may be used upon the approval of the Owner's Representative.
- B. Air-Entraining Admixture: ASTM C260.
- C. Water-Reducing Admixture: ASTM C 494, Type A.
- D. High-Range, Water-Reducing Admixture: ASTM C 494, Type F.
- E. Water-Reducing and Accelerating Admixture: ASTM C 494, Type E. F. Water-Reducing and Retarding Admixture: ASTM C 494, Type D.

**2.5 FIBER REINFORCEMENT**

- A. Synthetic Fiber: Fibrillated polypropylene fibers engineered and designed for use in concrete pavement, complying with ASTM C 1116, Type III 1/2 to 1-1/2 inches long.
- B. Synthetic Fiber: Fibrillated or monofilament polypropylene fibers engineered and designed for use in concrete payment, complying with ASTM C 1116, Type III, 1/2 to 1-1/2 inches long.
- C. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:

CITY OF COLORADO SPRINGS

- D. Products: Subject to compliance with requirements, provide one of the following:
  - 1. Fibrillated Fibers:
    - a. Fibrasol F; Axim Concrete Technologies.
    - b. Fibermesh; Fibermesh, Div. Of Synthetic Technologies.
    - c. Forta; Forta Corporation.
    - d. Grace Fibers: W.R. Grace & Co., Construction Products Div.
  - 2. Monofilament Fibers:
    - a. Fibrasol IIP; Axim Concrete Technologies.
    - b. Fiberstrand 100; Euelid Chemical Co.
    - c. Fibermix Stealth; Fibermesh, Div. Of Synthetic Industries. d. Forta Mono; Forta Corporation.
    - d. Grace MicroFiber; W.R. Grace & Co., Construction Products Div. f. Polystrand 1000; Metalcrete Industries.

**2.6 CURING MATERIALS**

- A. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. Dry.
- B. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.
- C. Clear Waterborne Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B.
- D. White Waterborne Membrane-Forming Curing Compound: ASTM C 309, Type2, Class B.

**2.7 RELATED MATERIALS**

- A. Expansion- and Isolation-Joint Filler Strips: ASTM D 1751, asphalt-saturated cellulose fiber.
- B. Coloring Agent: ASTM C979, synthetic mineral-oxide pigments or colored water-reducing admixtures; color stable, nonfading, and resistant to lime and other alkalis.
  - 1. Color: As indicated by manufacturer's designation.
  - 2. Color: Match Architect's sample.
  - 3. Color: As selected by Architect from manufacturer's full range.
- C. Pavement-Marking Paint: Latex, water-base emulsion; ready mixed; complying with FS TT-P-1952.
  - 1. Color: As indicated.
  - 2. Color: Blue for handicapped requirements, white elsewhere.
  - 3. Color: Blue for handicapped requirements, yellow for fire lanes, white elsewhere.
- D. Wheel Stops: Precast, air-entrained concrete; 2500-psi minimum compressive strength; approximately 6 inches high, 9 inches wide, and 84 inches long. Provide chamfered corners and drainage slots on underside, and provide holes for dowel-anchoring to substrate.
  - 1. Dowels: #4 rebar steel, minimum length 24 inches.
- E. Slip-Resistive Aggregate Finish: Factory-graded, packaged, rustproof, nonglazing, abrasive aggregate of fused aluminum-oxide granules or crushed emery with emery aggregate containing not less than 50 percent aluminum oxide and not less than 25 percent ferric oxide; unaffected by freezing, moisture, and cleaning materials.
- F. Bonding Agent: ASTM C 1059, Type II, non-redispersible, acrylic emulsion or styrene butadiene.
- G. Chemical Surface Retarder: Water-soluble, liquid set retarder with color dye, for horizontal concrete surface application, capable of temporarily delaying final hardening of concrete to a depth of 1/8 to 1/4 inch.

**2.8 CONCRETE MIXES**

- A. Prepare design mixes, proportioned according to ACI211.1 and ACI301, for each type and strength of normal-weight concrete determined by either laboratory trial mixes or field experience.
- B. Use a qualified independent testing agency for preparing and reporting proposed mix designs for the trial batch method.
  - 1. Do not use Owner's field quality-control testing agency as the independent testing agency.
- C. Proportion mixes to provide concrete with the following properties:
  - 1. Compressive Strength (28 days): 4000 psi.

**CITY OF COLORADO SPRINGS**

- 2. Maximum Water-Cementitious Materials Ratio: 0.45.
- 3. Slump Limit: 4 inches.
- D. Add air-entraining admixture at manufacturer’s prescribed rate to result in concrete at a point of placement having an air content of 4 to 6 percent.
- E. Add air-entraining admixture at manufacturer’s prescribed rate to result in concrete at point of placement having an air content as follows within a tolerance of plus or minus 1.5 percent..
- F. Synthetic Fiber: Uniformly disperse in concrete mix at manufacturer’s recommended rate, but not less than 1.5 lb./cu. Yd.
- G. Coloring Agent: Add coloring agent to mix according to manufacturer’s written instructions.

**2.9 CONCRETE MIXING**

- A. Ready-Mixed Concrete: Comply with requirements and with ASTM C94.

Specified Compressive Strength at 28 Days 4000 psi	Maximum Water/Cement Ratio by Weight 0.45
Minimum Cement Content per Cubic Yard of Concrete 564 lbs.	

- The proportioning of aggregate to cement shall be such as to produce a good workable mix and the slump shall be a maximum of four inches (4”) as per ASTM C-143. The equipment for batching of the aggregates, cement, water, and air-entraining agent shall be such that accurate control can be held over the various constituents.
- B. Ready-mixed concrete shall comply with ASTM C-94 for ready-mixed concrete and the following specifications:
  - C. Time of Haul: Concrete transportation in truck mixers or truck agitators shall be delivered to the site of work and completely discharged within a period of ninety (90) minutes after the cement comes in contact with the mixing water or with the combined aggregates when the combined aggregates contain free moisture in excess of 2% by weight. If hot weather exists causing the temperature of the concrete to rise above 90 degrees Fahrenheit, then the time of haul shall be within a period of sixty (60) minutes.
  - D. Production and Delivery: The production and the delivery of ready-mixed concrete shall be such that placing and finishing shall be continuous in so far as the operations require.
  - E. Testing of Concrete: Samples for test cylinders should be taken not less than once each day or not less than each 50 cubic yards of concrete placed. This requirement applies to both reinforced and reinforced concrete work unless otherwise directed by the Owner’s Representative. For structural elements, the Owner’s Representative may call for additional samples for strength testing.
  - F. A minimum of four cylinders shall be prepared for each sample of concrete. Once cylinder shall be strength tested after 7 days of curing time. Two cylinders shall be strength tested after 28 days of curing time.
  - G. In the event the initial 28 day cylinder should fail, the remaining two cylinders should be strength tested after 45 days of curing time.
  - H. Samples for slump and air-content testing should be taken for each truck delivery or not less than each 12 cubic yards where site batching is performed. The Owner’s Representative may vary the frequency of sampling and testing depending on site conditions. The preparation, handling, storage and testing procedures of all samples shall be in conformance with the applicable ASTM and AASHTO standards.
    - 1. Provide batch ticket for each batch discharged and used in the Work, indicating Project identification name and number, date, mix type, mix time, quantity, and amount of water added.

**PART 3 – EXECUTION****3.1 PREPARATION**

- A. Proof-roll prepared subbase surface to check for unstable areas and verify need for additional compaction. Proceed with pavement only after nonconforming conditions have been corrected and subgrade is ready to receive pavement.
- B. Remove loose material from compacted subbase surface immediately before placing concrete.
- C. Before any concrete is placed, all equipment for mixing and transporting the concrete shall be cleaned. All debris and ice shall be removed from the places to be occupied by the concrete. Forms shall be thoroughly oiled. Water shall be removed from the place of deposit before concrete is placed. Newly placed concrete shall be protected from any water damage. The top six (6) inches of the bedding or subgrade shall be graded and compacted to a minimum density of 90% ASTM D-1557 prior to placement of the concrete.
- D. When concrete placed on earth surfaces is necessary, the surfaces shall be free from frost, ice, mud and water. Concrete shall be conveyed from the mixer to the place of final deposit by methods which will prevent the separation or loss of materials. Concrete shall not be free dropped from more than four (4) feet.
- E. Equipment for tremming, chuting, pumping, and pneumatically conveying concrete shall be of such size and design as to insure a practically continuous flow of concrete at the delivery end without separation of materials.

**3.2 EDGE FORMS AND SCREED CONSTRUCTION**

- A. Set, brace, and secure edge forms, bulkheads, and intermediate screed guides for pavement to required lines, grades, and elevations. Install forms to allow continuous progress of work and so forms can remain in place at least 24 hours after concrete placement.
- B. Clean forms after each use and coat with form release agent to ensure separation from concrete without damage.

**3.3 STEEL REINFORCEMENT**

- A. General: Comply with CRSI's "Manual of Standard Practice" for fabricating reinforcement and with recommendations in CRSI's "Placing Reinforcing Bars" for placing and supporting reinforcement.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, or other bond-reducing materials.
- C. Arrange, space, and securely tie bars and bar supports to hold reinforcement in position during concrete placement. Maintain minimum cover to reinforcement.
- D. Install welded wire fabric in lengths as long as practicable. Lap adjoining pieces at least one full mesh, and lace splices with wire. Offset laps of adjoining widths to prevent continuous laps in either direction.
- E. Install fabricated bar mats in lengths as long as practicable. Handle units to keep them flat and free of distortions. Straighten bends, kinks, and other irregularities, or replace units as required before placement. Set mats for a minimum 2-inch overlap to adjacent mats.

**3.4 JOINTS**

- A. General: Construct construction, isolation, and contraction joints and tool edgings true to line with faces perpendicular to surface plane of concrete. Construct transverse joints at right angles to centerline, unless otherwise indicated.
  - 1. When joining existing pavement, place transverse joints to align with previously placed joints, unless otherwise indicated.
- B. Construction Joints: Set construction joints at side and end terminations of pavement and at locations where pavement operations are stopped for more than one-half hour, unless pavement terminates at isolation joints.
  - 1. Continue reinforcement across construction joints, unless otherwise indicated. Do not continue reinforcement through sides of pavement strips, unless otherwise indicated.
  - 2. Provide tie bars at sides of pavement strips where indicated.

- C. Isolation Joints: Form isolation joints of preformed joint-filler strips abutting catch basins, manholes, inlets, structures, walks, other fixed objects, and where indicated.
  - 1. Locate expansion joints at intervals of 50 feet, unless otherwise indicated.
  - 2. Extend joint fillers full width and depth of joint.
  - 3. Terminate joint filler not less than 1/2 inch or more than 1 inch below finished surface if joint sealant is indicated.
  - 4. Place top of joint filler flush with finished concrete surface if joint sealant is not indicated.
  - 5. Furnish joint fillers in one-piece lengths. Where more than one length is required, lace or clip joint-filler sections together.
  - 6. Protect top edge of joint filler during concrete placement with metal, plastic, or other temporary preformed cap. Remove protective cap after concrete has been placed on both sides of joint.
- D. Install dowel bars and support assemblies at joints where indicated. Use 5/8 inch cardboard tube or PVC. Lubricate or asphalt-coat one-half of dowel length to prevent concrete bonding to one side of joint.
- E. Contraction Control Joints: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to a least one fourth of the concrete thickness, as follows:
  - 1. Grooved Joints: Form contraction joints after floating by grooving and finishing each edge of joint with groover tool to the following radius. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover marks on concrete surfaces.
    - a. Radius: 1/2 inch
  - 2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8 inch-wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before developing random contraction cracks. Within 24 hours of initial pour.
- F. Edging: Tool edges of pavement, gutters, curbs and joints in concrete after initial floating with an edging tool to the following radius. Repeat tooling of edges after applying surface finishes. Eliminate tool marks on concrete surfaces.
  - 1. Radius: 1/2 inch

### **3.5 CONCRETE PLACEMENT**

- A. Inspection: Before placing concrete, inspect and complete formwork installation, reinforcement steel, and items to be embedded or cast in. Notify other trades to permit installation of their work. Owner's Representative needs to be notified 24 hours to inspect forms prior to pouring concrete.
- B. Remove snow, ice, or frost from subbase surface and reinforcement before placing concrete. Do not place concrete on frozen surfaces.
- C. Moisten subbase to provide a uniform dampened condition at the time concrete is placed. Do not place concrete around manholes or other structures until they are at the required finish elevation and alignment.
- D. Comply with requirements and with recommendations in ACI 304R for measuring, mixing, transporting, and placing concrete.
- E. Do not add water to concrete during delivery, at Project site, or during placement.
- F. Deposit and spread concrete in a continuous operation between transverse joints. Do not push or drag concrete into place or use vibrators to move concrete into place.
- G. Consolidate concrete by mechanical vibrating equipment supplemented by hand-spading, rodding, or tamping. Use equipment and procedures to consolidate concrete according to recommendations in ACI309R.
  - 1. Consolidate concrete along face of forms and adjacent to transverse joints with an internal vibrator. Keep vibrator away from joint assemblies, reinforcement, or side forms. Consolidate with care to prevent dislocating reinforcement, dowels, and joint devices.
- H. Expansion joints shall be 1/2 inch premolded felt expansion joint material and shall be placed every 50 feet both ways unless otherwise indicated on drawings.
- I. Control joints shall 1 1/2" in depth and shall be placed every five feet (5') each way unless otherwise indicated on drawings.

- J. Base course is to be placed if indicated on drawings and is to be 3/8 +/- crusher waste or gravel to Standard Class 6.
- K. All sleeving under concrete surfaces shall be stamped into surfaced with an "S" on each end of the sleeve.
- L. Screed pavement surfaces with a straightedge and strike off. Commence initial floating using bull floats or darbies to form an open textured and uniform surface plane before excess moisture or bleed water appears on the surface. Do not further disturb concrete surfaces before beginning finishing operations or spreading dry-shake surfaces treatments.
- M. Curbs and Gutters. When automatic machine placement is used for curb and gutter placement, submit revised mix design and laboratory test results that meet or exceed requirements. Produce curbs and gutters to required cross section, lines, grades, finish, and jointing as specified for formed concrete. If results are not approved, remove and replace with formed concrete.
- N. Slip-Form Pavers: When automatic machine placement is used for pavement, submit revised mix design and laboratory test results that meet or exceed requirements. Produce pavement to required thickness, lines, grades, finishes, and jointing as required for formed pavement.
  1. Compact subbase and prepare subgrade of sufficient width to prevent displacement of paver machine during operations.
- O. When adjoining pavement lanes are placed in separate pours, do not operate equipment on concrete until pavement has attained 85 percent of its 28-day compressive strength.
- P. Cold-Weather Placement: Comply with ACI306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
  1. Concrete shall not be placed in cold weather unless the ambient temperature has reached 40 degrees Fahrenheit at 9:00 a.m., and the temperature is rising. Cold weather protection blankets, etc. will be required for five days after concrete has been placed. Uniformly heat water and aggregates before mixing to obtain a concrete mixture temperature of not less than 50 degrees F and not more than 80 deg F at point of placement.
  2. Do not use frozen materials or materials containing ice or snow.
  3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators, unless otherwise specified and approved in mix designs.
- Q. Hot-Weather Placement: Place concrete according to recommendations in ACI305R and as follows when hot-weather conditions exist:
  1. Cool ingredients before mixing to maintain concrete temperature at time of placement below 90 degrees F. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
  2. Cover reinforcement steel with water-soaked burlap so steel temperature will not exceed ambient air temperature immediately before embedding in concrete.
  3. Fog-spray forms, reinforcement steel, and subgrade just before placing concrete. Keep subgrade moisture uniform without standing water, soft spots, or dry areas.

**3.6 CONCRETE FINISHING**

- A. General: Wetting of concrete surfaces during screeding, initial floating, or finishing operations is prohibited.
- B. Float Finish: Begin the second floating operation when bleed-water sheen has disappeared and the concrete surface has stiffened sufficiently to permit operations. Float surface with power- driven floats, or by hand floating if area is small or inaccessible to power units. Finish surfaces to true planes. Cut down high spots, and fill low spots. Refloat surface immediately to uniform granular texture.
  1. Medium-to-Fine-Textured Broom Finish: Draw a soft bristle broom across float-finished concrete surface perpendicular to line of traffic to provide a uniform, fine-line texture. Or as otherwise indicated on drawings.

**3.7 SPECIAL FINISHES**

- A. Monolithic Exposed Aggregate Finish: Expose coarse aggregate to pavement surfaces as follows:
  - 1. Immediately after floating, spray-apply chemical surface retarder to pavement according to manufacturer's written instructions.
  - 2. Cover with plastic sheeting, scaling laps with tape, and remove when ready to continue finishing operations.
  - 3. Without dislodging aggregate, remove excess mortar by lightly brushing surface with a stiff, nylon bristle broom.
  - 4. Fine-spray surface with water and brush. Repeat water flushing and brushing cycle until cement film is removed from aggregate surfaces to depth required.
- B. Slip-Resistant Aggregate Finish: Before final floating, apply slip-resistant aggregate finish to pavement surfaces according to manufacturer's written instructions and as follows.
  - 1. Uniformly spread 25 lb/100 sq. ft. of dampened non slip aggregate over the surface. Tamp aggregate flush with surface using a steel trowel, but do not force below surface.
  - 2. After curing, lightly work surface with a steel wire brush or an abrasive stone, and water to expose non slip aggregate.
- C. Colored Dry-Shake Hardener Finish: After initial floating, apply colored dry-shake materials to pavement surfaces according to manufacturer's written instructions and as follows:
  - 1. Uniformly apply colored dry-shake materials at a rate of 100 lb/100 sq. ft. unless greater amount is recommended by manufacturer to match pavement color required.
  - 2. Uniformly distribute approximately two-thirds of colored dry-shake material over the concrete surface with mechanical spreader, and embed by power floating. Follow power floating with a second shake application, uniformly distributing remainder of dry-shake material to ensure uniform color, and embed by power floating.
  - 3. After final floating, apply a hand-trowel finish followed by a broom finish to concrete. Cure concrete with curing compound recommended by dry-shake material manufacturer. Apply curing compound immediately after final finishing.

**3.8 CONCRETE PROTECTION AND CURING**

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI306.1 for cold-weather protection and follow recommendations in ACI305R for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb./sq. ft x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Begin curing after finishing concrete, but not before free water has disappeared from concrete surface.
- D. Curing Methods: Cure concrete by moisture curing, moisture-retaining-cover curing, curing compound, or a combination to these as follows:
  - 1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:
    - a. Water.
    - b. Continuous water-fog spray.
    - c. Absorptive cover, water saturated, and kept continuously wet. Cover concrete surfaces and edges with 12-inch lap over adjacent absorptive covers.
  - 2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Immediately repair any holes or tears during curing period using cover material and waterproof tape.
  - 3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.

**3.9 PAVEMENT TOLERANCES**

- A. Comply with tolerances of ACI 117 and as follows:
  - 1. Elevation: 1/4 inch
  - 2. Thickness: Plus 3/8 inch minus 1/4 inch.
  - 3. Surface: Gap below 10-foot-long, unlevelled straightedge not to exceed 1/4 inch.
  - 4. Lateral Alignment and Spacing of Tie Bars and Dowels; 1 inch.
  - 5. Vertical Alignment of Tie-Bars and Dowels: 1/4 inch.
  - 6. Alignment of Tie-Bar End Relative to Line Perpendicular to Pavement Edge: 1/2 inch.
  - 7. Alignment of Dowel-Bar End Relative to Line Perpendicular to Pavement Edge: Length of dowel 1/4 inch per 12 inches.
  - 8. Joint Spacing: 3 inches.
  - 9. Contraction Joint Depth: Plus 1/4 inch, no minus.
  - 10. Joint Width: Plus 1/8 inch, no minus.

**3.10 PAVEMENT MARKING**

- A. Do not apply pavement-marking paint until layout, colors, and placement have been verified with Owner's Representative.
- B. Allow concrete pavement to cure for 28 days and be dry before starting pavement marking. C. Sweep and clean surface to eliminate loose material and dust.
- D. Apply paint with mechanical equipment to produce pavement markings of dimensions indicated with uniform, straight edges. Apply at manufacturer's recommended rates to provide a minimum wet film thickness of 15 mils.

**3.11 WHEEL STOPS**

- A. Securely attach wheel stops into pavement with #4 rebar steel, minimum length 24 inches.

**3.12 FIELD QUALITY CONTROL**

- A. Testing Agency: Owner will engage a qualified testing and inspection agency to sample materials, perform tests, and submit test reports during concrete placement. Sampling and testing for quality control may include those specified in this Article.
- B. Testing Services: Testing shall be performed according to the following requirements:
  - 1. Sampling Fresh Concrete: Representative samples of fresh concrete shall be obtained according to ASTM C172, except modified for slump to comply with ASTM C94.
  - 2. Slump: ASTM C 143; one test at point of placement for each compressive-strength test, but not less than one test for each day's pour of each type of concrete. Additional tests will be required when concrete consistency changes.
  - 3. Air Content: ASTM C231, pressure method; one test for each compressive-strength test, but not less than one test for each day's pour of each type of air-entrained concrete.
  - 4. Concrete Temperature: ASTM C1064; one test hourly when air temperature is 40 degrees F and below and 80 degrees F and above, and one test for each set of compressive-strength specimens.
  - 5. Compression Test Specimens: ASTM C31/C 31M; one set of four standard cylinders for each compressive-strength test, unless otherwise indicated. Cylinders shall be molded and stored for laboratory-cured test specimens unless field-cured test specimens are required.
  - 6. Compressive-Strength Tests: ASTM C39; one set for each day's pour of each concrete class exceeding 5 cu. Yd, but less than 25 cu. Yd., plus one set for each additional 50 cu. Yd. One specimen shall be tested at 7 days and two specimens at 28 days; one specimen shall be retained in reserve for later testing if required.
  - 7. When frequency of testing will provide fewer than five compressive-strength tests for a given class of concrete, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
  - 8. When total quantity of a given class of concrete is less than 50 cu. yd. Owner's Representative may waive compressive-strength testing if adequate evidence of satisfactory strength is provided.

9. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, current operations shall be evaluated and corrective procedures shall be provided for protecting and curing in-place concrete.

10. Strength level of concrete will be considered satisfactory if averages of sets of three consecutive compressive-strength test results equal or exceed specified compressive strength and no individual compressive-strength test result falls below specified compressive-strength by more than 500 psi.

- C. Test results shall be reported in writing to Owner's Representative, concrete manufacturer, and Contractor within 24 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing agency, concrete type and class, location of concrete batch in pavement, design compressive strength at 28 days, concrete mix proportions and materials, compressive breaking strength, and type of break for both 7- and 14- day tests.
- D. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Owner's Representative but will not be used as the sole basis for approval or rejection.
- E. Additional Tests: Testing agency shall make additional tests of the concrete when test results indicate slump, air entrainment, concrete strengths, or other requirements have not been met, as directed by Owner's Representative. Testing agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42, or by other methods as directed.

### **3.13 REPAIRS AND PROTECTION**

- A. Remove and replace concrete pavement that is broken, damaged, or defective, or does not meet requirements in this Section. Contractor is required to repair or replace any defects that occur during the contract period as set forth in the contract documents. To include but not limited to the following:
  - B. Work showing, a patch, chips or other cracking appearance or other finish blemishes or apparent "lap" marks of improper troweling will be rejected, removed and replaced at the Contractor's expense.
  - C. The Contractor shall erect barricades, snow fencing, or take appropriate measures to totally protect concrete until it has thoroughly hardened. Any area marked or defaced in any manner shall be removed to the nearest expansion or contraction joint and be replaced at no additional costs to the Owner.
  - D. No patched or cover materials will be accepted on a new pour, to hide any defects in original surface. Only with prior approval from Owner's Representative.
    - 1. Spauling.
    - 2. Cracking over 1/8" wide.
    - 3. Any settling greater than 3/4", that would cause uneven surfaces will be replaced.
  - E. Drill test cores where directed by Owner's Representative when necessary to determine magnitude of cracks of defective areas. Fill drilled core holes in satisfactory pavement areas with portland cement concrete bonded to pavement with epoxy adhesive.
  - F. Protect concrete from damage. Exclude traffic from pavement for at least 14 days after placement. When construction traffic is permitted, maintain pavement as clean as possible by removing surface stains and spillage of materials as they occur.
  - G. Maintain concrete pavement free of stains, discoloration, dirt, and other foreign material. Sweep concrete pavement not more than two days before date scheduled for Substantial Completion inspections.

### **END OF SECTION 02751 – CEMENT CONCRETE PAVEMENT (REVISED 2013)**

**SCHEDULE F**

**EXHIBITS**

This section includes the examples of the forms used for submitting the required bonds as well as a sample contract format, which will be issued as a result of this solicitation:

- Exhibit 1 -- Bid Bond
- Exhibit 2 -- Performance Bond
- Exhibit 3 -- Materials and Payment Bond
- Exhibit 4 -- Maintenance Bond
- Exhibit 5 -- Reps & Certs
- Exhibit 6 -- Sample Contract
- Exhibit 7 -- Minimum Insurance Requirements
- Exhibit 8 -- Trail Detour Standards
- Exhibit 9 -- Rock Island Trail Drawings

CITY OF COLORADO SPRINGS

EXHIBIT 1 CITY OF COLORADO SPRINGS BID BOND

1. KNOW ALL MEN BY THESE PRESENTS, THAT:

(Name) \_\_\_\_\_
(Address) \_\_\_\_\_ As Principal, hereinafter called Principal, and

(SURETY Name) \_\_\_\_\_ a corporation organized and existing under the laws of the State of:

(SURETY Address) \_\_\_\_\_
and AUTHORIZED TO DO BUSINESS IN THE STATE OF COLORADO, as Surety, hereinafter called Surety, are held firmly bound to the CITY OF COLORADO SPRINGS, COLORADO, as Oblige, hereinafter called the Oblige, in the sum of: (Insert Proposal Amount in Words) (\$ \_\_\_\_\_ DOLLARS),

lawful money of the United States of America, for payment of which sum well and truly to be made, the Principal and the Surety bind themselves, their heirs, executors, successors and assigns, jointly and severally, firmly by these presents.

2. WHEREAS, the Principal has submitted to the Oblige, a contract bid dated the \_\_\_\_\_ day of \_\_\_\_\_ For the following contract:

B16-112 IP ROCK ISLAND TRAIL

3. NOW THEREFORE, THE CONDITION OF THIS OBLIGATION IS SUCH THAT, If Principals bid is accepted by Oblige and Principal is awarded the contract in whole or in part, and the Principal shall enter into the contract with the Oblige in accordance with the terms of such bid, and give such Payment, Performance, and Maintenance bond or bonds as may be specified in the bidding or contract documents with good and sufficient surety for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof, or in the event of the failure of the Principal to enter such contract and give such bond or bonds, if the Principal shall promptly pay to the Oblige the amount of this bond as set forth herein above, then this obligation shall be null and void, otherwise this obligation to remain in full force and effect.

Signed and sealed on the dates set forth below:

(Witness) \_\_\_\_\_ FOR: \_\_\_\_\_ (Principals Name)

(Seal) \_\_\_\_\_ BY: \_\_\_\_\_

(Seal) \_\_\_\_\_ ITS: \_\_\_\_\_ This \_\_\_\_\_ day of \_\_\_\_\_

(Witness) \_\_\_\_\_ FOR: \_\_\_\_\_ (Surety's Name)

(Seal) \_\_\_\_\_ BY: \_\_\_\_\_

(Seal) \_\_\_\_\_ ITS: \_\_\_\_\_ This \_\_\_\_\_ Day of \_\_\_\_\_

Bond # \_\_\_\_\_ This Bond (is) (is not) a SBA Guaranteed Bond.

CITY OF COLORADO SPRINGS

EXHIBIT 2 – PERFORMANCE BOND

CITY OF COLORADO SPRINGS PERFORMANCE BOND

1. KNOW ALL MEN BY THESE PRESENTS, THAT:

(Name) \_\_\_\_\_ As Principal, hereinafter called Principal, and
(Address) \_\_\_\_\_

(SURETY Name) \_\_\_\_\_ a corporation organized and existing under
the laws of the State of:

(SURETY Address) \_\_\_\_\_
and AUTHORIZED TO DO BUSINESS IN THE STATE OF COLORADO, as Surety, hereinafter called Surety, are
held firmly bound to the CITY OF COLORADO SPRINGS, COLORADO, as Obligee, hereinafter called the Obligee,
in the sum of: (Insert Proposal Amount in Words) (\$ \_\_\_\_\_ DOLLARS),

lawful money of the United States of America, for payment of which sum well and truly to be made, the Principal and
the Surety bind themselves, their heirs, executors, successors and assigns, jointly and severally, firmly by these
presents.

2. WHEREAS, the Principal and the Obligee have entered into,
a contract dated the \_\_\_\_\_ day of \_\_\_\_\_ For the following project:
B16-112 IP ROCK ISLAND TRAIL

Contract # \_\_\_\_\_ which contract is by reference made a part hereof, and referred to as the Contract.

3. NOW THEREFORE, THE CONDITION OF THIS OBLIGATION IS SUCH THAT if the Principal shall promptly and faithfully
perform all terms, conditions and other obligations of the Contract, and any modifications or extensions thereof granted by the
Obligee, then this obligation shall be null and void: otherwise this obligation shall remain in full force and effect.

4. The Surety for value received agrees that no extension of time, change in, addition to, or other alteration modification of the
terms, conditions or obligations of the Contract or work to be performed thereunder, or any forbearance on the part of either
the Obligee or the Principal to the other shall in any way release or affect the liability or obligation of this Bond, and the Surety
hereby waives notice of any such extension of time, change, addition, modification, alteration or forbearance.

Signed and sealed on the dates set forth below:

(Witness) \_\_\_\_\_ FOR: \_\_\_\_\_ (Principals Name)

(Seal) \_\_\_\_\_ BY: \_\_\_\_\_

(Seal) \_\_\_\_\_ ITS: \_\_\_\_\_
This \_\_\_\_\_ Day of \_\_\_\_\_

(Witness) \_\_\_\_\_ FOR: \_\_\_\_\_ (Surety's Name)

(Seal) \_\_\_\_\_ BY: \_\_\_\_\_

(Seal) \_\_\_\_\_ ITS: \_\_\_\_\_
This \_\_\_\_\_ Day of \_\_\_\_\_

Bond # \_\_\_\_\_ This Bond \_\_ (is) \_\_ (is not) a SBA Guaranteed Bond.

CITY OF COLORADO SPRINGS

EXHIBIT 3 - CITY OF COLORADO SPRINGS LABOR & MATERIAL PAYMENT BOND

1. KNOW ALL MEN BY THESE PRESENTS, THAT:

\_\_\_\_\_  
(Name)

As Principal, hereinafter called Principal, and

\_\_\_\_\_  
(Address)

\_\_\_\_\_  
(SURETY Name)

a corporation organized and existing under the laws of the State of:

\_\_\_\_\_  
(SURETY Address)

and AUTHORIZED TO DO BUSINESS IN THE STATE OF COLORADO, as Surety, hereinafter called Surety, are held firmly bound to the CITY OF COLORADO SPRINGS, COLORADO, as Obligee, hereinafter called the Obligee, in the sum of: (Insert Proposal Amount in Words)

(\$            DOLLARS),

lawful money of the United States of America, for payment of which sum well and truly to be made, the Principal and the Surety bind themselves, their heirs, executors, successors and assigns, jointly and severally, firmly by these presents.

2. WHEREAS, the Principal and the Obligee have entered into,

a contract dated the \_\_\_\_\_ day of \_\_\_\_\_ For the following project:

**B16-112 IP ROCK ISLAND TRAIL**

Contract # \_\_\_\_\_ which contract is by reference made a part hereof, and referred to as the Contract.

3. NOW THEREFORE, THE CONDITION OF THIS OBLIGATION IS SUCH THAT, if the Principal shall promptly make payments of all amounts lawfully due to all persons supplying or furnishing the Principal or the Principals subcontractors with labor, materials, rental machinery, tools or equipment used or performed in the prosecution of the work provided for in the Contract; and if the Principal shall indemnify and save harmless the Obligee to the extent of any payments in connection with the carrying out of the Contract which the Obligee may be required to pay under the law, all in accord with Colorado State Law, Section 38-26-105 C.R.S., then this obligation shall be null and void; otherwise this obligation shall remain in full force and effect.

AND FURTHER, should the Principal or the Principals subcontractors fail to duly pay for any labor, materials, team hire, sustenance, provisions, provender, or other supplies used or consumed by the Principal or the Principals subcontractors in the performance of the work contracted to be done or fails to pay any person who supplies rental machinery, tools or equipment, all amounts due as the result of the use of such machinery, tools, or equipment, in the prosecution of the work under the Contract, the Surety shall pay the same in an amount not exceeding the sum specified in this Bond together with interest at the rate of eight percent per annum, in accord with Colorado State Law, Section 38-26-106 C.R.S.

In accord with Colorado State Law, Section 38-26-105 C.R.S., actions against the Principal and Surety under this Bond shall be brought within six months after the final completion of the Contract as defined by the ordinances, rules and regulations of the City of Colorado Springs, Colorado, a home rule City, and not afterwards.

4. The Surety for value received agrees that no extension of time, change in, addition to, or other alteration or modification of the terms, conditions or obligations of the Contract or work to be performed thereunder, or any forbearance on the part of either the Obligee or the Principal to the other shall in any way release or affect the Surety's liability or obligation on this Bond, and the surety hereby waives notice of any such extension of time, change, addition, modification, alteration or forbearance.

Signed and sealed on the dates set forth below:

\_\_\_\_\_  
(Witness) FOR: \_\_\_\_\_  
(Principals Name)

CITY OF COLORADO SPRINGS

Page Two (2) of Labor & Material Payment Bond

(Seal) BY: \_\_\_\_\_  
ITS: \_\_\_\_\_  
This \_\_\_\_\_ day of \_\_\_\_\_  
FOR: \_\_\_\_\_  
(Witness) \_\_\_\_\_ (Surety's Name)  
BY: \_\_\_\_\_  
ITS: \_\_\_\_\_  
(Seal) This \_\_\_\_\_ day of \_\_\_\_\_  
Bond # \_\_\_\_\_ This Bond \_\_\_ (is) \_\_\_ (is not) a SBA Guaranteed Bond.  
# \_\_\_\_\_

CITY OF COLORADO SPRINGS

EXHIBIT 4 - CITY OF COLORADO SPRINGS MAINTENANCE BOND

1. KNOW ALL MEN BY THESE PRESENTS, THAT:

(Name) \_\_\_\_\_

As Principal, hereinafter called Principal, and

(Address) \_\_\_\_\_

(SURETY Name) \_\_\_\_\_

a corporation organized and existing under the laws of the State of:

(SURETY Address) \_\_\_\_\_

and AUTHORIZED TO DO BUSINESS IN THE STATE OF COLORADO, as Surety, hereinafter called Surety, are held firmly bound to the CITY OF COLORADO SPRINGS, COLORADO, as Obligee, hereinafter called the Obligee, for the use and benefit of claimants as herein below defined, in the amount of: (Insert Proposal Amount in Words)

(\$ \_\_\_\_\_ DOLLARS),

lawful money of the United States of America, together with interest as may be provided by law, for the maintenance and guarantee obligations of the Contract, for the payment whereof Principal and Surety bind themselves, their heirs, executors, successors and assigns, jointly and severally, firmly by these presents.

2. WHEREAS, the Principal and the Obligee have entered into,

a contract dated the \_\_\_\_\_ day of \_\_\_\_\_ For the following project:

**B16-112 IP ROCK ISLAND TRAIL**

Contract # \_\_\_\_\_ which contract is by reference made a part hereof, and referred to as the Contract.

3. NOW THEREFORE, THE CONDITION OF THIS OBLIGATION IS SUCH THAT, if the Principal shall promptly, properly and without cost to Obligee perform all maintenance and other guarantee obligations under the terms of the Contract, including any modifications or extensions thereof granted by the Obligee, for a period of TWO (2) year(s) from the date of final payment upon the Contract by the Obligee, and in the case of each correction or repair, during a period of one year after the date of said correction or repair or for the remaining period of years set forth herein, whichever is longer, then this obligation shall be null and void; otherwise this obligation shall remain in full force and effect.

4. The Surety for value received agrees that no extension of time, change in, addition to, or other alteration or modification of the terms, conditions or obligations of the Contract or work to be performed thereunder, or any forbearance on the part of either the Obligee or the Principal to the other shall in anyway release affect the Surety's liability or obligation on this Bond, and the surety hereby waives notice of any such extension of time, change, addition, modification, alteration or forbearance.

Signed and sealed on the dates set forth below:

\_\_\_\_\_  
(Witness) FOR: \_\_\_\_\_  
(Principals Name)

BY: \_\_\_\_\_

(Seal) ITS: \_\_\_\_\_  
This \_\_\_\_\_ day of \_\_\_\_\_

\_\_\_\_\_  
(Witness) FOR: \_\_\_\_\_  
(Surety's Name)

BY: \_\_\_\_\_

(Seal) ITS: \_\_\_\_\_  
This \_\_\_\_\_ day of \_\_\_\_\_

Bond # \_\_\_\_\_ This Bond \_\_ (is) \_\_ (is not) a SBA Guaranteed Bond.

## EXHIBIT 5-REPRESENTATIONS AND CERTIFICATIONS

### 1. INSURANCE REQUIREMENTS

Offeror shall comply with all insurance requirements and will submit the Insurance Certificates prior to performance start date. If limits are different from the stated amounts, Offeror shall explain variance. Certain endorsements and “additionally insured” statements may require further clarification and specific statements on a project specific basis and should have been described in the Offeror’s proposal.

---

Initials for 1

### 2. ETHICS VIOLATIONS

- a) The Offeror shall have in place and follow reasonable procedures designed to prevent and detect possible violations described in this clause in its own operations and direct business relationships.
- b) Offeror certifies the Offeror has not violated or caused any person to violate, and shall not violate or cause any person to violate, the City’s Code of Ethics contained in Article 3, of Chapter 1 of the City Code and in the City’s Procurement Rules and Regulations
- c) When the Offeror has reasonable grounds to believe that a violation described in this clause may have occurred, the Offeror shall promptly report the possible violation to the City Contracts Specialist in writing.
- c) The Offeror must disclose with the signing of this proposal, the name of any officer, director, or agent who is also an employee of the City and any City employee who owns, directly or indirectly, an interest of ten percent (10%) or more in the Offeror’s firm or any of its branches.
- d) In addition, the Offeror must report any conflict or apparent conflict, current or discovered during the performance of the Contract, to the City Contracts Specialist.
- e) The Offeror shall not engage in providing gifts, meals or other amenities to City employees. The right of the Offeror to proceed may be terminated by written notice issued by City Contracts Specialist if Offeror offered or gave a gratuity to an officer, official, or employee of the City and intended by the gratuity to obtain a contract or favorable treatment under a contract.
- f) The Offeror shall cooperate fully with the City or any agency investigating a possible violation on behalf of the City. If any violation is determined, the Offeror will properly compensate the City.
- g) The Offeror agrees to incorporate the substance of this clause (after substituting “Contractor” for “Offeror”) in all subcontracts under this offer.

---

Initials for 2

### 3. ILLEGAL ALIENS

If Offeror has any employees or subcontractors, Offeror shall comply with § 8-17.5-101, et seq., C.R.S. regarding Illegal Aliens – Public Contracts for Services, and this section of this Agreement. 8-17.5-102 includes, in part, that:

1. Offeror shall not:
  - a. Knowingly employ or contract with an illegal alien to perform work under this Agreement; or
  - b. Enter into a contract with a subcontractor that fails to certify to Offeror that the subcontractor shall not knowingly employ or contract with an illegal alien to perform work under this Agreement.
2. Offeror has verified or attempted to verify that Offeror does not employ any illegal aliens and, will participate in the E-Verify Program or State Department program in order to confirm eligibility of all employees who are newly hired to perform work under public contract for services.
3. Offeror will not use E-Verify Program or State Department program procedures to undertake pre-employment screening of job applicants while the public contract for services is being performed.

CITY OF COLORADO SPRINGS

- 4. If Offeror obtains actual knowledge that a subcontractor performing work under this Agreement knowingly employs or contracts with an illegal alien, Provider shall:
  - a. Notify the subcontractor and the City within three days that Offeror has actual knowledge that the subcontractor is employing or contracting with an illegal alien; and
  - b. Terminate the subcontract with the subcontractor if within three days of receiving such notice, the subcontractor does not stop employing or contracting with the illegal alien. However, the Offeror shall not terminate the contract with the subcontractor if during this three day period:
    - i. The subcontractor provides information which establishes that the subcontractor has not knowingly employed or contracted with an illegal alien, and
    - ii. The Offeror will not employ the illegal aliens in the performance of any City contract.
- 5. Offeror shall comply with any reasonable request by the Department of Labor and Employment made in the course of an investigation that the Department is undertaking pursuant to the authority established in §8-17.5-102(5), C.R.S.
- 6. If Offeror violates this provision, the City may terminate the contract for a breach of contract. If the Agreement is terminated, the Offeror shall be liable for actual and consequential damages.

\_\_\_\_\_  
Initials for 3

**4. COOPERATION WITH OTHER CONTRACTORS**

Other City activities/contracts may be in progress or start during the performance of this contract. The Offeror shall coordinate the work harmoniously with the other contractors or City personnel, if applicable.

\_\_\_\_\_  
Initials for 4

**5. INTERNET USE**

Should the Offeror require access to City Internet resources in the performance of this requirement, a "Contractor's Internet Use Agreement" form must be separately signed by each individual having access to the City Network. The completed Contractor's Internet Use Agreement will be maintained with this agreement. Inappropriate use of the City Network will be grounds for immediate termination of any awarded contact.

\_\_\_\_\_  
Initials for 5

**6. LITIGATION**

If awarded a contract, Offeror shall notify the City within five (5) calendar days after being served with a summons, complaint, or other pleading in any matter which has been filed in any federal or state court or administrative agency. The Offeror shall deliver copies of such document(s) to the City's Procurement Services Manager. The term "litigation" includes an assignment for the benefit of creditors, and filings of bankruptcy, reorganization and/or foreclosure.

\_\_\_\_\_  
Initials for 6

**7. CONTRACTOR'S REGISTRATION INFORMATION**

Offeror's firm verifies and states that they are (check all that apply):

CITY OF COLORADO SPRINGS

\_\_\_\_\_ Large Business (i.e. do not qualify as a small business or non-profit)

\_\_\_\_\_ Nonprofit

\_\_\_\_\_ Small Business

\_\_\_\_\_ Minority Owned Business/Small Disadvantaged Business

\_\_\_\_\_ Woman Owned Business

\_\_\_\_\_ Veteran Owned Business

\_\_\_\_\_ Service-Disabled Veteran Owned Business

\_\_\_\_\_ HUBZone Business

Note: The City accepts self-certification for these categories in accordance with Small Business Administration (SBA) standards. The SBA size standards are found on the SBA website <https://www.sba.gov/content/am-i-small-business-concern>.

\_\_\_\_\_  
Initials for 7

**8. CONTRACTOR PERSONNEL**

a) The Offeror shall appoint one of its key personnel as the "Authorized Representative" who shall have the power and authority to interface with the City and represent the Offeror in all administrative matters concerning this proposal and any awarded contract, including without limitation such administrative matters as correction of problems modifications, and reduction of costs.

b) The Authorized Representative shall be the person identified in the Offeror's proposal, unless the Offeror provides written notice to the City naming another person to serve as its Authorized Representative. Communications received by the City Contracts Specialist from the Authorized Representative shall be deemed to have been received from the Offeror.

The individual, \_\_\_\_\_ (Name)

with position, \_\_\_\_\_ (Title)

Can be reached at

Work telephone number: \_\_\_\_\_

Home telephone number: \_\_\_\_\_

Cellular telephone number: \_\_\_\_\_

E-mail address: \_\_\_\_\_

\_\_\_\_\_  
Initials for 8

**9. OFFEROR'S CERTIFICATION**

The undersigned hereby affirms that:

- a) He/She is a duly authorized agent of the Offeror;
  - b) He/She has read and agrees to the City's standard terms and conditions attached.
  - c) The offer is presented in full compliance with the collusive prohibitions of the City of Colorado Springs.
- The Offeror certifies that no employee of its firm has discussed, or compared the offer with any other offeror or City employee and has not colluded with any other offeror or City employee.

- d) The Offeror certifies that it has checked all of its figures, and understands that the City will not be responsible for any errors or omissions on the part of the Offeror in preparing its proposal.
  - e) By submitting an offer the Offeror certifies that it has complied and will comply with all requirements of local, state, and federal laws, and that no legal requirements have been or will be violated in making or accepting this solicitation.
- I hereby certify that I am submitting the proposal based on my company's capabilities to provide quality products and/or services on time.

\_\_\_\_\_  
Initials for 9

**10. OFFEROR CERTIFICATION REGARDING DEBARMENT, SUSPENSION, PROPOSED DEBARMENT, AND OTHER RESPONSIBILITY MATTERS:**

- 1. The Offeror certifies to the best of its knowledge and belief, that (i) the Offeror and/or any of its Principals
  - a. Are ( ), Are not ( ) presently debarred, suspended, proposed for debarment, or declared ineligible for the award of contracts by any Federal agency;
  - b. Have ( ), Have not ( ), within a three year period preceding this offer, been convicted of or had a civil judgment rendered against them for: commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (federal, state, local) contract or subcontract; violation of Federal or state antitrust statutes relation to the submission of offers; or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statement, tax evasion, or receiving stolen property; and
  - c. Are ( ), Are not ( ) presently indicated for, or otherwise criminally or civilly charged by a governmental entity with, commission of any of the offenses enumerated in any paragraphs above.
- 2. The Offeror shall provide immediate written notice to the City Contracts Specialist if, at any time prior to contract award, the Offeror learns that its certification was erroneous when submitted or has become erroneous by reasons of changed circumstances.
- 3. The certification in paragraph 1. above, is a material representation of fact upon which reliance was placed when making award. If it is later determined that the Offeror knowingly rendered an erroneous certification, in addition to other remedies available to the City, the City Contracts Specialist may terminate the contract resulting from this solicitation for default. Termination for default may result in additional charges being levied for the costs incurred by the City to initiate activities to replace the awarded Contractor.

\_\_\_\_\_  
Initials for 10

**11. ACCEPTANCE OF CITY CONTRACTS SPECIALIST'S SOLE AUTHORITY FOR CHANGES**

Unless otherwise specified in the Contract, the Offeror hereby agrees that any changes to the scope of work, subsequent to the original contract signing, shall be generated in writing and an approval signature shall be obtained from the City Contracts Specialist prior to additional work performance.

\_\_\_\_\_  
Initials for 11

**CITY OF COLORADO SPRINGS**

Name of Company:

Federal Tax ID Number:

DUNS Number:

Principle Place of Business:

---

Signature of Authorized Representative

Printed Name:

Title:

Date:

**EXHIBIT 6            SAMPLE CONTRACT**

CONSTRUCTION CONTRACT

Contract Number:		Project Name/Title	
Vendor/Contractor			
Contact Name:		Telephone:	Email:
Address:			
Federal Tax ID #		Please check one:	<input type="checkbox"/> Corporation <input type="checkbox"/> Individual <input type="checkbox"/> Partnership
City Contracting Specialist	Name & Phone#	City Dept Rep	Name & Phone# & Department Name
NOT TO EXCEED Contract Amount:		City Account #	Acct Code (5)   Fund (3)   Dept (4)   Project (7)
Contract Type:		Period of Performance:	
Contract Value Amount:		Contract Funding Amount:	

**1. INTRODUCTION**

THIS FIXED UNIT PRICE CONTRACT ("Contract") is made and entered into this \_\_\_ day of \_\_\_\_\_, 2016 by and between the City of Colorado Springs, a Colorado municipal corporation and home rule city, in the County of El Paso, State of Colorado, (the "City"), and \_\_\_\_\_ (the "Contractor").

THE CITY AND THE CONTRACTOR HEREBY AGREE AS FOLLOWS:

The City has heretofore prepared the necessary Contract Documents for the following Activity: XXXXXXXX.

The Contractor did on the \_\_\_ day of \_\_\_\_\_, 2016 submit to the City the Contractor's written offer and proposal to do the work therein described under the terms and conditions therein set forth and furnish all materials, supplies, labor, services, transportation, tools, equipment, and parts for said work in strict conformity with the accompanying Contract Documents, which are attached hereto and incorporated herein by this reference, including the following:

1. This Contract Document
2. Appendix A –Terms and Conditions
3. Appendix B – Contractor's Proposal,
4. Appendix C – Statement of Work.
5. Appendix D – General Provisions
6. Appendix C – Technical Specifications

**2. COMPENSATION/CONSIDERATION**

THIS FIXED UNIT PRICE CONTRACT is established at the Not to Exceed amount of \$xxxxxxx.

Subject to the terms and conditions of the Contract Documents, Contractor agrees to furnish all materials and to perform all work as set forth in its proposal and as required by the Contract Documents.

All pricing is in accordance with the fixed unit prices found in Schedule A, as proposed by the Contractor. Payment made for actual quantities as set forth in Schedule B, General Construction Terms and Conditions. At no time shall the total obligation of the City exceed the not to exceed amount of this Contract.

### 3. TERM OF CONTRACT

Contractor will start work promptly after the Notice to Proceed and continue to work diligently until completed. The Contractor shall complete all work on an as ordered basis throughout the Contract period which is **90 Calendar Days** after the Notice-to-Proceed ("Period of Performance") as per the specifications and drawings. The Contractor shall provide a two-year guarantee on all work performed under this Contract after the job has been completed and accepted.

### 4. INSURANCE

The Contractor shall provide and maintain an acceptable Certificate of Insurance Policy(s) which includes Property, Liability and Professional Errors and Omissions coverage, as listed in Schedule F. The City of Colorado Springs shall be reflected as an additional insured on the Property and Liability policy(s).

Further, Contractor understands and agrees that Contractor shall have no right of coverage under any existing or future City comprehensive, self, or personal injury policies. Contractor shall provide insurance coverage for and on behalf of Contract that will sufficiently protect Contractor, or Contractor's agents, employees, servants or other personnel, in connection with the services which are to be provided by Contractor pursuant to this Contract, including protection from claims for bodily injury, death, property damage, and lost income. Contractor shall provide worker's compensation insurance coverage for Contractor and all Contractor personnel. Contractor shall file applicable insurance certificates with the City and shall also provide additional insurance as indicated in this Contract. ***A CURRENT CERTIFICATE OF INSURANCE IS REQUIRED PRIOR TO COMMENCEMENT OF SERVICES LISTING THE CITY AS ADDITIONALLY INSURED.***

### 5. RESPONSIBILITY OF THE CONTRACTOR

- A. The Contractor shall be responsible for the professional quality, technical accuracy, and the coordination of all Scope of Work services furnished by the Contractor under this Contract. The Contractor shall, without additional compensation, correct or revise any errors or deficiencies in services provided under this Contract to the satisfaction of the City.
- B. The City's review, approval of, acceptance of, or payment for the services required under this Contract shall not be construed to operate as a waiver of any rights under this Contract or of any cause of action arising out of the performance of this Contract, and the Contractor shall be and remain liable to the City for any and all damages to the City caused by the Contractor's negligent performance of any of the services furnished under this Contract.
- C. The rights and remedies of the City provided for under this Contract are in addition to any other rights and remedies provided by law.
- D. If the Contractor is comprised of more than one legal entity, each such entity shall be jointly and severally liable hereunder.

## 6. WORK OVERSIGHT

- A. The extent and character of the work to be done by the Contractor shall be subject to the general approval of the City's delegated Project Manager.
- B. If any of the work or services being performed does not conform with Contract requirements, the City may require the Contractor to perform the work or services again in conformity with Contract requirements, at no increase in Contract amount. When defects in work or services cannot be corrected by re-performance, the City may (1) require the Contractor to take necessary action to ensure that future performance conforms to Contract requirements and (2) reduce the Contract price to reflect the reduced value of the work or services performed.
- C. If the Contractor fails to promptly perform the defective work or services again or to take the necessary action to ensure future performance is in conformity with Contract requirements, the City may (1) by Contract or otherwise, perform the services and charge to the Contractor any cost incurred by the City that is directly related to the performance of such work or service or (2) terminate the Contract for breach of contract.

## 7. SUBCONTRACTORS, ASSOCIATES, AND OTHER CONTRACTORS

- A. Any subcontractor, outside associates, or other contractors used by the Contractor in connection with Contractor's work under this Contract shall be limited to individuals or firms that are specifically identified by the Contractor in the Contractor's proposal and agreed to by the City. The Contractor shall obtain the City's Project Manager's written consent before making any substitution of these subcontractors, associates, or other contractors.
- B. The Contractor shall include a flow down clause in all of its subcontracts, agreements with outside associates, and agreements with other contractors. The flow down clause shall cause all of the terms and conditions of this Contract, including all of the applicable parts of the Contract Documents, to be incorporated into all subcontracts, agreements with outside associates, and agreements with other contractors. The flow down clause shall provide clearly that there is no privity of contract between the City and the Contractor's subcontractors, outside associates, and other contractors.

## 8. KEY PERSONNEL

The key personnel listed in the proposal and/or below will be the individuals used in the performance of the work. If any of the listed key personnel leave employment or are otherwise not utilized in the performance of the work, approval to substitute must be obtained by the Contractor from the City's Project Manager. Any substitute shall have the same or a higher standard of qualifications that the key personnel possessed at the time of Contract award.

## 9. START AND CONTINUANCE OF WORK

It is further agreed that the Contractor will start work promptly and continue to work diligently until this Contract is completed.

The following provisions shall apply to this Contract and shall take precedence and control in the event of conflict with any other provisions of the Contract:

## 10. APPROPRIATION OF FUNDS

This Contract is expressly made subject to the limitations of the Colorado Constitution and Section 7-60 of the Charter of the City of Colorado Springs. Nothing herein shall constitute, nor be deemed to constitute, the creation of a debt or multi-year fiscal obligation or an obligation of future appropriations

by the City Council of Colorado Springs, contrary to Article X, § 20, Colo. Const., or any other constitutional, statutory, or charter debt limitation. Notwithstanding any other provision of this Contract, with respect to any financial obligation of the City which may arise under this Agreement in any fiscal year after the year of execution, in the event the budget or other means of appropriation for any such year fails to provide funds in sufficient amounts to discharge such obligation, such failure (i) shall act to terminate this Contract at such time as the then-existing and available appropriations are depleted, and (ii) neither such failure nor termination shall constitute a default or breach of this Contract, including any sub-agreement, attachment, schedule, or exhibit thereto, by the City. As used herein, the term "appropriation" shall mean and include the due adoption of an appropriation ordinance and budget and the approval of a Budget Detail Report (Resource Allocations) which contains an allocation of sufficient funds for the performance of fiscal obligations arising under this Contract.

## **11. CHANGES**

The Contractor and the City agree and acknowledge as a part of this Contract that no change order or other form or order or directive may be issued by the City which requires additional compensable work to be performed, which work causes the aggregate amount payable under the Contract to exceed the amount appropriated for this Contract as listed above, unless the Contractor has been given a written assurance by the City that lawful appropriations to cover the costs of the additional work have been made or unless such work is covered under a remedy-granting provision of this Contract. The Contractor and the City further agree and acknowledge as a part of this Contract that no change order or other form or order or directive which requires additional compensable work to be performed under this Contract shall be issued by the City unless funds are available to pay such additional costs, and, regardless of any remedy-granting provision included within this Contract, the Contractor shall not be entitled to any additional compensation for any change which increases or decreases the Contract completion date, or for any additional compensable work performed under this Contract, and expressly waives any rights to additional compensation, whether by law or equity, unless, prior to commencing the additional work, the Contractor was given a written change order describing the change in Contract completion date or the additional compensable work to be performed, and setting forth the amount of compensation to be paid, which change order was signed by the authorized City representative. The amount of compensation to be paid, if any, shall be deemed to cover any and all additional general, extended overhead, direct, indirect or other cost or expense or profit of the Contractor whatsoever. It is the Contractor's sole responsibility to know, determine, and ascertain the authority of the City representative signing any change order under this Contract.

No change to this Contract shall be valid unless duly approved and issued in writing by the City of Colorado Springs Procurement Services Division. The City shall not be liable for any costs incurred by the Contractor resulting from work performed for changes not issued in writing by the City of Colorado Springs Procurement Services Division.

## **12. ASSIGNMENT**

No assignment or transfer by the Contractor of this Contract or any part thereof or of the funds to be received thereunder by the Contractor will be recognized unless such assignment has had the prior written approval of the City and the surety has been given due notice of such assignment. Such written approval by the City shall not relieve the Contractor of the obligations under the terms of this Contract. In addition to the usual recitals in assignment contracts, the following language must be included in the assignment:

It is agreed that the funds to be paid to the assignee under this assignment are subject to a prior lien for services rendered or materials supplied for the performance of the work called for in said contract in favor of all persons, firms, or corporations rendering such services or supplying such materials.

## **13. CHOICE OF LAW**

## CITY OF COLORADO SPRINGS

This Contract is subject to and shall be interpreted under the law of the State of Colorado, and the Charter, City Code, Ordinances, Rules and Regulations of the City of Colorado Springs, Colorado, a Colorado home rule city. Court venue and jurisdiction shall be exclusively in the Colorado District Court for El Paso County, Colorado. The Parties agree that the place of performance for this Contract is deemed to be in the City of Colorado Springs, El Paso County, State of Colorado. The Contractor shall ensure that the Contractor and the Contractor's employees, agents, officers and subcontractors are familiar with, and comply with, applicable Federal, State, and Local laws and regulations as now written or hereafter amended.

### **14. WORKERS' COMPENSATION INSURANCE**

Contractor shall take out and maintain during the Period of Performance, Colorado Worker's Compensation Insurance for the Contractor and all employees of the Contractor. If any service is sublet by the Contractor, the Contractor shall require the subcontractor to provide the same coverage for the subcontractor and subcontractor's employees. Workers' Compensation Insurance shall include occupational disease provisions covering any obligations of the Contractor in accord with the provisions of the Workers' Compensation Act of Colorado.

### **15. INDEMNIFICATION**

Contractor agrees that the Contractor shall indemnify, defend and hold harmless the City, its officers, employees and agents, from and against any and all loss, damage, injuries, claims, cause or causes of action, or any liability whatsoever resulting from, or arising out of, or in connection with the Contractor's obligations or actions under this Contract caused by any willful or negligent error, omission or act or a failure to observe any applicable standard of care by the Contractor or any person employed by it or anyone for whose acts the Contractor is legally liable. In consideration of the award of this Contract, to the extent damages are covered by insurance, the Contractor agrees to waive all rights of subrogation against the City, its subsidiary, parent, associated and/or affiliated entities, successors, or assigns, its elected officials, trustees, employees, agents, and volunteers for losses arising from the work performed by the Contractor for the City.

### **16. INDEPENDENT CONTRACTOR**

In the performance of the Contractor's obligations under this Contract, it is understood, acknowledged and agreed between the parties that the Contractor is at all times acting and performing as an independent contractor, and the City shall neither have nor exercise any control or direction over the manner and means by which the Contractor performs the Contractor's obligations under this Contract, except as otherwise stated within the Contract terms. The City shall not provide any direction to the Contractor on the work necessary to complete the project. Contractor understands that it is an independent contractor responsible for knowing how to perform all work or tasks necessary to complete project. The Contractor understands and agrees that the Contractor and the Contractor's employees, agents, servants, or other personnel are not City employees. The Contractor shall be solely responsible for payment of salaries, wages, payroll taxes, unemployment benefits or any other form of compensation or benefit to the Contractor or any of the Contractor's employees, agents, servants or other personnel performing services or work under this Contract, whether it is of a direct or indirect nature. Further in that regard, it is expressly understood and agreed that for such purposes neither the Contractor nor the Contractor's employees, agents, servants or other personnel shall be entitled to any City payroll, insurance, unemployment, worker's compensation, retirement or any other benefits whatsoever.

### **17. APPLICABLE LAW AND LICENSES**

In the conduct of the services or work contemplated in this Contract, the Contractor shall ensure that the Contractor and all subcontractors comply with all applicable state, federal and City and local law,

rules and regulations, technical standards or specifications. The Contractor shall qualify for and obtain any required licenses prior to commencement of work.

## **18. PRIOR AGREEMENTS**

This is a completely integrated Contract and contains the entire agreement between the parties. Any prior written or oral agreements or representations regarding this Contract shall be of no effect and shall not be binding on the City. This Contract may only be amended in writing, and executed by duly authorized representatives of the parties hereto.

## **19. WAIVERS**

No waiver of default by the City of any of the terms, covenants, and conditions hereof to be performed, kept, and observed by the Contractor shall be construed, or shall operate, as a waiver of any subsequent default of any of the terms, covenants, or conditions herein contained to be performed, kept, and observed by the Contractor.

## **20. THIRD PARTIES**

It is expressly understood and agreed that enforcement of the terms and conditions of this Contract, and all rights of action relating to such enforcement, shall be strictly reserved to the Parties hereto, and nothing contained in this Contract shall give or allow any such claim or right of action by any other or third person or entity on such Contract. It is the express intention of the Parties hereto that any person or entity, other than the Parties to this Contract, receiving services or benefits under this Contract shall be deemed to be incidental beneficiaries only.

## **21. TERMINATION**

### **A. Termination for Convenience.**

By signing this Contract, Contractor represents that it is a sophisticated business and enters into the Contract voluntarily, has calculated all business risks associated with this Contract, and understands and assumes all risks of being terminated for convenience, whether such risks are known or not known. Contractor agrees that the City may terminate this Contract at any time for convenience of the City, upon written notice to the Contractor. Contractor expressly agrees to and assumes the risk that the City shall not be liable for any costs or fees of whatsoever kind and nature if termination for convenience occurs before Contractor begins any work or portion of the work. Contractor further expressly agrees and assumes the risks that the City shall not be liable for any unperformed work, anticipated profits, overhead, mobilizations costs, set-up, demobilization costs, relocation costs of employees, layoffs or severance costs, administrative costs, productivity costs, losses on disposal of equipment or materials, cost associated with the termination of subcontractors, costs associated with purchase orders or purchases, or any other costs or fees of any kind and nature, if Contractor has started or performed portions of the Contract prior to receiving notice from the City. The City shall be liable only for the portions of work Contractor actually satisfactorily completed up to the point of the issuance of the Notice of Termination for convenience. Upon receipt of this notice the Contractor shall immediately: discontinue all services affected (unless the notice directs otherwise), and deliver to the City all data, drawings, specifications, reports, estimates, summaries, and other information and materials accumulated in performing this Contract, whether completed or in process.

### **B. Termination for Cause: The occurrence of any one or more of the following events ("Event of Default") will justify termination for cause:**

- i. Contractor's failure to perform the work in accordance with the Contract Documents (including, but not limited to, failure to supply sufficient skilled workers or suitable materials or equipment or failure to adhere to the progress schedule as adjusted from time to time.
- ii. Contractor's disregard of the laws or regulations of any public body having jurisdiction.

CITY OF COLORADO SPRINGS

- iii. Contractor's disregard of the authority of Project Manager.
- iv. Contractor's violation in any material provision of the Contract Documents.
- v. Contractor's failure to make prompt payments to its subcontractors, and suppliers of any tier, or laborers or any person working on the work by, through, or under the Contractor or any of them, any all of their employees, officers, servants, members, and agents.
- vi. Contractor files a petition commencing a voluntary case under the U.S. Bankruptcy Code, or for liquidation, reorganization, or an arrangement pursuant to any other U.S. or state bankruptcy Laws, or shall be adjudicated a debtor or be declared bankrupt or insolvent under the U.S. Bankruptcy Code, or any other federal or state laws relating to bankruptcy, insolvency, winding-up, or adjustment of debts, or makes a general assignment for the benefit of creditors, or admits in writing its inability to pay its debts generally as they become due, or if a petition commencing an involuntary case under the U.S. Bankruptcy Code or an answer proposing the adjudication of Contractor as a debtor or bankrupt or proposing its liquidation or reorganization pursuant to the Bankruptcy Code or any other U.S. federal or state bankruptcy laws is filed in any court and Contractor consents to or acquiesces in the filing of that pleading or the petition or answer is not discharged or denied within sixty (60) Calendar Days after it is filed.
- vii. A custodian, receiver, trustee or liquidator of Contractor, all or substantially all of the assets or business of Contractor, or of Contractor's interest in the Work or the Contract, is appointed in any proceeding brought against Contractor and not discharged within sixty (60) Calendar Days after that appointment, or if Contractor shall consent to or acquiesces in that appointment.
- viii. Contractor fails to commence correction of defective work or fails to correct defective work within a reasonable period of time after written notice.

If one or more of the events identified in Paragraphs i-viii above occur, City may give Contractor written notice of the event and direct the event be cured. Any such Notice to Cure will Contractor a minimum of ten (10) calendar days to prepare and submit to the Project Manager a plan to correct the Event of Default. If such plan to correct the Event of Default is not submitted to the Project Manager within ten (10) days after the date of the written notice or such plan is unacceptable to the City, the City may, give Contractor (and the Surety, if any) written notice that Contractor's services are being terminated for cause. Upon delivery of the termination notice, City may terminate the services of Contractor in whole or in part, exclude Contractor from the site, and take possession of the work and of all Contractor's tools, appliances, construction equipment, and machinery at the project site, and use the same to the full extent they could be used by Contractor (without liability to Contractor for trespass or conversion), incorporate in the work all materials and equipment stored at the site or for which City has paid Contractor but which are stored elsewhere, and finish the work as City may deem expedient. In such case, Contractor shall not be entitled to receive any further payment until Certificate of Completion of the work. In the event City terminates this Contract for Cause and the cost of completing the work exceeds the unpaid balance of the Contract price, Contractor shall pay City for any costs of completion which exceed the Contract price when combined with all amounts previously paid to Contractor. When exercising any rights or remedies under this paragraph City shall not be required to obtain the lowest price for the work performed. Should the cost of such completion, including all proper charges, be less than the original Contract price, the amount so saved shall accrue to the City. Neither the City nor any officer, agent or employee of the City shall be in any way liable or accountable to the Contractor or the Surety for the method by which the completion of the said work, or any portion thereof, may be accomplished or for the price paid.

Where Contractor's services have been so terminated by City, the termination will not affect any rights or remedies of City against Contractor or Surety then existing or which may thereafter accrue. Any retention or payment of moneys due Contractor by City will not release Contractor from liability.

C. Termination Notice. Upon receipt of a termination notice, whether for convenience or cause, the Contractor shall immediately: discontinue all services affected (unless the notice directs otherwise), and deliver to the City all data, drawings, specifications, reports, estimates, summaries, and other information and materials accumulated in performing this Contract, whether completed or in process.

D. Removal of Equipment. Except as provided above, in the case of termination of this Contract before completion from any cause whatever, the Contractor, if notified to do so by the City, shall promptly remove any part or all of Contractor's equipment and supplies from the property of the City, failing which the City shall have the right to remove such equipment and supplies at the expense of the Contractor.

## **22. BOOKS OF ACCOUNT AND AUDITING**

The Contractor shall make available to the City if requested, true and complete records, which support billing statements, reports, performance indices, and all other related documentation. The City's authorized representatives shall have access during reasonable hours to all records, which are deemed appropriate to auditing billing statements, reports, performance indices, and all other related documentation. The Contractor agrees that it will keep and preserve for at least seven years all documents related to the Contract which are routinely prepared, collected or compiled by the Contractor during the performance of this Contract.

The City's Auditor and the Auditor's authorized representatives shall have the right at any time to audit all of the related documentation. The Contractor shall make all documentation available for examination at the Auditor's request at either the Auditor's or Contractor's offices, and without expense to the City.

## **23. ILLEGAL ALIENS**

Illegal Aliens - Public Contracts for Services - Compliance with Title 8, Article 17.5, Colorado Revised Statutes: The Contractor acknowledges, understands, agrees, and certifies that: In the performance of any work or the provision of any services by the Contractor under this Contract, the Contractor shall not knowingly employ or contract with an illegal alien to perform work under this Contract; or enter into a contract with any subcontractor that fails to certify to the Contractor that the subcontractor shall not knowingly employ or contract with an illegal alien to perform work under this Contract or under the subcontract to this Contract. The Contractor certifies in accord with Section 8-17.5-102(1) C.R.S. that, on the date the Contractor signs this Contract, the Contractor does not knowingly employ or contract with an illegal alien who will perform work under this Contract and that the Contractor shall participate in the e-verify program or Colorado Department of Labor and Employment program in order to confirm the employment eligibility of all employees who are newly hired for employment or to perform work under this Contract. The Contractor is expressly prohibited from using the e-verify program or Colorado Department of Labor and Employment program procedures to undertake pre-employment screening of job applicants while this Contract and any services under this Contract are being performed. If the Contractor obtains actual knowledge that a subcontractor performing work under this Contract for services knowingly employs or contracts with an illegal alien, the Contractor shall notify the subcontractor and the City within three days that the Contractor has actual knowledge that the subcontractor is employing or contracting with an illegal alien, and terminate the subcontract with the subcontractor if within three days of receiving the notice the subcontractor does not stop employing or contracting with the illegal alien; except that the Contractor shall not terminate the Contract with the subcontractor if during the three days the subcontractor provides information to establish that the subcontractor has not knowingly employed or contracted with an illegal alien. The Contractor shall comply with any request by the City, federal government, or the Colorado Department of Labor and Employment made in the course of an investigation. If the Contractor violates or fails to comply with any provision of C.R.S. 8-17.5-101 et seq, the City may terminate this

Contract for breach of contract. If this Contract is so terminated, the Contractor shall be liable for any actual and consequential damages to the City.

#### **24. COMPLIANCE WITH IMMIGRATION AND CONTROL ACT**

Contractor certifies that Contractor has complied with the United States Immigration and Control Act of 1986. All persons employed by Contractor for performance of this Contract have completed and signed Form I-9 verifying their identities and authorization for employment.

#### **25. LABOR**

The Contractor shall employ only competent and skilled workmen and foremen in the conduct of work on this Contract. The Contractor shall at all times enforce strict discipline and good order among Contractor's employees. The Project Manager shall have the authority to order the removal from the work of any person, including Contractor's or any subcontractor's employees, who refuses or neglects to observe any of the provisions of these Plans or Specifications, or who is incompetent, abusive, threatening, or disorderly in conduct and any such person shall not again be employed on the Project.

In accord with the Keep Jobs in Colorado Act, codified at sections 8-17-101, et seq., C.R.S., Colorado labor shall be employed to perform the work to the extent of not less than eighty percent (80%) of each type or class of labor in the several classifications of skilled and common labor employed on this Project et seq.; provided however, that this paragraph shall not apply if the Project receives federal funding.

In no event shall the City be responsible for overtime pay.

#### **26. GRATUITIES**

- A. This Contract may be terminated if the Mayor, the Mayor's designee, and/or the Procurement Services Manager determine, in their sole discretion, that the Contractor or any officer, employee, agent, or other representative whatsoever, of the Contractor offered or gave a gift or hospitality to a City officer, employee, agent or Contractor for the purpose of influencing any decision to grant a City contract or to obtain favorable treatment under any City contract.
- B. The terms "hospitality" and "gift" include, but are not limited to, any payment, subscription, advance, forbearance, acceptance, rendering or deposit of money, services, or anything of value given or offered, including but not limited to food, lodging, transportation, recreation or entertainment, token or award.
- C. Contract termination under this provision shall constitute a breach of contract by the Contractor, and the Contractor shall be liable to the City for all costs of reletting the contract or completion of the project. Further, if the Contractor is terminated under this provision, or violates this provision but is not terminated, the Contractor shall be subject to debarment under the City's Procurement Regulations. The rights and remedies of the City provided in this clause shall not be exclusive and are in addition to any other rights and remedies provided by law or under this Contract.

#### **27. NON-DISCRIMINATION**

- A. In accord with section 24-34-402, C.R.S., the Contractor will not discriminate against any employee or applicant for employment because of disability, race, creed, color, sexual orientation, religion, age, national origin, or ancestry. But, with regard to a disability, it is not a discriminatory or an unfair employment practice for an employer to take into consideration disability if there is no reasonable accommodation that the employer can make with regard to the disability, the disability

## CITY OF COLORADO SPRINGS

actually disqualifies the person from the job, and the disability has a significant impact on the job. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment without regard to their disability, race, creed, color, sexual orientation, religion, age, national origin, or ancestry. Such actions shall include, but not be limited to, the following: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training; including apprenticeship.

- B. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.
- C. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to disability, race, creed, color, sexual orientation, religion, age, national origin, or ancestry.
- D. Contractor will cooperate with the City in using Contractor's best efforts to ensure that Disadvantaged Business Enterprises are afforded the maximum opportunity to compete for subcontracts or work under this Contract.

### 28. ORDER OF PRECEDENCE

Any inconsistency in this Contract shall be resolved by giving precedence in the following order:

- A. This Contract document with its terms and conditions
- B. Terms and Conditions
- C. General Construction Terms and Conditions
- D. Technical Specifications
- E. Contractor's Bid
- F. Other Appendices, Attachments, Exhibits, or Schedules

### 29. HEADINGS

The section headings contained in this Contract are for reference purposes only and shall not affect the meaning or interpretation of this Contract.

### 30. DISPUTES

- A. All administrative and contractual disputes arising from or related to this Contract other than those arising under Unanticipated Circumstances provisions (in section 107.27 of Schedule D General Construction Terms and Conditions) shall be addressed in the following manner:
  - i. If either Party disputes or disagrees with a Contract term or the other Party's interpretation of a Contract term or has any other administrative or contractual dispute not addressed in the Unanticipated Circumstances provisions, such Party shall promptly give the other Party written notice of said dispute.
  - ii. The Parties shall hold a meeting as soon as reasonably possible, but in no event later than thirty (30) calendar days from the initial written notice of the dispute, attended by persons with decision-making authority regarding the dispute, to attempt in good faith to negotiate a resolution of the dispute; provided, however, that no such meeting shall be deemed to vitiate or reduce the obligations and liabilities of the Parties or be deemed a waiver by a Party of any remedies to which such Party would otherwise be entitled unless otherwise agreed to by the Parties in writing.
  - iii. If, within thirty (30) calendar days after such meeting, the Parties have not succeeded in negotiating a resolution of the dispute, they agree to submit the dispute to non-binding mediation and to bear equally the costs of the mediation.

- iv. The Parties will jointly appoint a mutually acceptable mediator. If they fail to do so within twenty (20) calendar days from the conclusion of the negotiation period, they shall each select a mediator. The two mediators will then appoint a third mediator who shall conduct mediation for the Parties as the sole mediator.
- v. The Parties agree to participate in good faith in the mediation and negotiations for a period of thirty (30) calendar days. The substantive and procedural law of the State of Colorado shall apply to the proceedings. If the Parties are not successful in resolving the dispute through mediation, then the Parties shall be free to pursue any other remedy afforded by the laws of the State of Colorado.
- vi. Until final resolution of any dispute hereunder, the Contractor shall diligently proceed with the performance of this Contract as directed by the City. For purposes of this Contract, termination for convenience shall not be deemed a dispute. The City of Colorado Springs and the Contractor agree to notify each other in a timely manner of any claim, dispute, or cause of action arising from or related to this Contract, and to negotiate in good faith to resolve any such claim, dispute, or cause of action. To the extent that such negotiations fail, the City of Colorado Springs and the Contractor agree that any lawsuit or cause of action that arises from or is related to this Contract shall be filed with and litigated only by the Colorado District Court for El Paso County, CO.

### **31. DELIVERY**

The City may cancel this Contract or any portion thereof if delivery is not made when and as specified, time being of the essence in this Contract. Contractor shall pay the City for any loss or damage sustained by the City because of failure to perform in accordance with this Contract.

### **32. PAYMENTS**

All invoices shall be sent to the Project Manager identified in this Contract.

The City will pay the Contractor, upon submission of proper invoices, the prices stipulated in the Contract for services rendered and accepted, less any deductions provided in this Contract within 30 days (Net 30). The City will not pay late fees or interest. Any discount payment terms offered on the invoice may be taken by the City.

All payments for Construction will be made in accordance with the Payment provisions found in Schedule D – General Construction Terms and Conditions.

Each invoice must contain at least the following information:

Contract number, issued purchase order number, invoice number, invoice date, timeframe covered by invoice, type and amount of labor and materials used for that time period, dollar amount in unit price, extended price, and total value of invoice.

### **33. INSPECTION OF SERVICES**

The Contractor is responsible for performing or having performed all inspections and tests necessary to substantiate that the services furnished under this Contract conform to Contract requirements, including any applicable technical requirements for specified manufacturers' parts. This clause takes precedence over any City inspection and testing required in the Contract's specifications, except for specialized inspections or tests specified to be performed solely by the City.

- A. Definition of "services", as used in this clause, includes services performed, workmanship, and material furnished or utilized in the performance of services.
- B. The Contractor shall provide and maintain an inspection system acceptable to the City covering the services under this Contract. Complete records of all inspection work performed by the

## CITY OF COLORADO SPRINGS

Contractor shall be maintained and made available to the City during Contract performance and for as long afterwards as the Contract requires.

- C. The City has the right to inspect and test all services called for by the Contract, to the extent practicable at all times and places during the term of the Contract. The City will perform inspections and tests in a manner that will not unduly delay the work.
- D. If the City performs inspections or test on the premises of the Contractor or a subcontractor, the Contractor shall furnish, and shall require subcontractors to furnish, at no increase in Contract price, all reasonable facilities and assistance for the safe and convenient performance of these duties.

### 34. SECURITY

The City maintains security requirements regarding access to City buildings and other City workplaces and worksites on City property. All Contractor personnel accessing City buildings, workplaces, or worksites, may be required to produce a valid, Government issued picture identification. Contractor personnel lacking such identification may not be allowed access to such sites. No costs incurred by the Contractor due to City security requirements shall be allowable or payable under this Contract.

### 35. TIME IS OF THE ESSENCE

In as much as the Contract concerns a needed or required service, the terms, conditions, and provisions of the Contract relating to the time of performance and completion of work are of the essence of this Contract. The Contractor shall begin work on the day specified and shall prosecute the work diligently so as to assure completion of the work within the number of calendar days or date specified, or the date to which the time for completion may have been extended.

### 36. EMPLOYMENT OF LABOR

The Contractor shall comply with, and defend and hold the City harmless from any violation of all laws and lawful rules and regulations, both of the State of Colorado and of the United States, relating to Workmen's Compensation, unemployment compensation, Social Security, payment for overtime, and all other expenses and conditions of employment under this Contract.

### 37. SALES TAX

The Contractor must have a tax-exemption certificate from the Colorado Department of Revenue for this project. The certificate does not apply to City of Colorado Springs Sales and Use Tax which shall be applicable. The tax exempt project number and the exemption certificate only applies to County, PPRTA (Pikes Peak Rural Transportation Authority), and State taxes when purchasing construction and building materials **to be incorporated into this project.**

Furthermore, the exemption **does not** include or apply to the purchase or rental of equipment, supplies or materials that **do not become a part of the completed project or structure.** Such purchases and rentals are subject to full applicable taxation.

All contracts with subcontractors must include the City of Colorado Springs Sales and Use Tax on the work covered by the Contract, and other taxes as applicable.

Note: For all equipment, materials and supplies incorporated into the work purchased from vendors or suppliers not licensed to collect City Sales Tax (i.e. out of state suppliers, etc.), City Use Tax is due and payable to the City. The Contractor shall execute and deliver, and shall cause the Contractor's subcontractors to execute and deliver to the City Sales Tax Office, ST 16 forms listing all said equipment, materials and supplies and the corresponding use tax due, along with payment for said

## CITY OF COLORADO SPRINGS

taxes. Any outstanding taxes due may be withheld from the final payment due the Contractor and may result in suspension of Contractor from bidding on City projects.

Forms and instructions can be downloaded at <https://coloradosprings.gov/cat/government/tax-information/sales-tax>. Questions can be directed to the City Sales Tax Division at (719) 385-5903.

Our Registration Numbers are as follows:  
City of Colorado Springs  
Federal I.D.: 84-6000573  
Federal Excise: A-138557  
State Sales Tax: 98-03479

The Contractor's payment or exemption of State of Colorado, El Paso County and City Sales and Use Taxes shall be as specified herein.

### **38. SEVERABILITY**

If any terms, conditions, or provisions of this Contract shall be held unconstitutional, illegal, or void, such finding shall not affect any other terms, conditions, or provisions of this Contract.

### **39. LIABILITY OF CITY EMPLOYEES**

All authorized representatives of the City are acting solely as agents and representatives of the City when carrying out and exercising the power or authority granted to them under the Contract. There shall not be any liability on them either personally or as employees of the City.

### **40. APPENDICES**

The following Appendices are made a part of this Agreement:

1. Appendix A – Additional Terms and Conditions
2. Appendix B – Contractor's Proposal,
3. Appendix D – Terms and Conditions
4. Appendix E – General Construction Terms and Conditions
5. Appendix F – Technical Specifications
6. Appendix G – Rock Island Trail Drawings

**CONTRACT SIGNATURE PAGE**

The Contractor certifies in accord with Section 8-17.5-102(1) C.R.S. that, on the date the Contractor signs this Contract, the Contractor does not knowingly employ or Contract with an illegal alien who will perform work under this Contract and that the Contractor shall participate in the e-verify program or Colorado Department of Labor and Employment program in order to confirm the employment eligibility of all employees who are newly hired for employment or to perform work under this Contract. The Contractor is expressly prohibited from using the e-verify program or Colorado Department of Labor and Employment program procedures to undertake pre-employment screening of job applicants while this Contract and any services under this Contract are being performed.

**IN WITNESS WHEREOF**, the parties have caused these presents to be executed on the day and the year first above written.

This Contract is executed in one (1) original copy.

<b>THE CITY OF COLORADO SPRINGS, COLORADO:</b>	
<b>Jeffrey H. Greene</b> Chief of Staff	<b>Date</b>

<b>SECOND PARTY:</b>	
Corporate Name	
Signature	Date
Title	

**EXHIBIT 7 MINIMUM INSURANCE REQUIREMENTS**

The following listed minimum insurance requirements shall be carried by all contractors and consultants unless otherwise specified in the City’s solicitation package, Special Provisions, or Standard Specifications.

1.	X	Workers’ Compensation and Employers Liability as required by statute. Employers Liability coverage is to be carried for a minimum limit of \$100,000.
2.	X	Automobile Liability covering any auto (including owned, hired, and non-owned autos) with a minimum of \$1,000,000 each accident combined single limit.
3.	X	Commercial General Liability for limits not less than \$1,000,000 combined single limit for bodily injury and property damage for each occurrence. Coverage shall include blanket contractual, broad form property damage, products and completed operations and contractors protective endorsements.
4.		Liquor Legal Liability Insurance: If the event producer is a business that manufactures, distributes, sells, or serves alcoholic beverages, and intends to serve or sell alcoholic beverages at an event, they must also submit a Certificate of Insurance providing proof of a liquor legal liability insurance policy or properly endorsed general liability policy. a. If this event producer hires a vendor to serve or sell alcoholic beverages, rather than providing the alcohol themselves, they must submit a Certificate of Insurance from the vendor providing proof of a liquor legal liability insurance policy or properly endorse general liability policy. b. In either case, the minimum acceptable limit of liability per claim and aggregate is \$1,000,000. This requirement applies to the business or group which serves or sells the alcohol.
5.		Technology Errors and Omissions Liability including Network Security and Privacy Liability not less than \$3,000,000 per loss with a \$3,000,000 aggregate. a. The policy shall provide a waiver of subrogation. b. The insurance shall provide coverage for liability arising from theft, dissemination and/or use of confidential information stored or transmitted in electronic form. c. Network Security Liability arising from the unauthorized access to, use of or tampering to gain access to your services including denial of service, unless caused by a mechanical or electrical failure d. Liability arising from the introduction of a computer virus into, or otherwise causing damage to, a customer’s or third person’s computer, computer system, network or similar computer related property and the data, software, and programs thereon.
6.		Excess Liability for limits not less than \$1,000,000 combined single limit for bodily injury and property damage for each occurrence.
7.		Builders Risk or Installation Floater Insurance: Contractor shall purchase and maintain property insurance written on a builder’s risk “all-risk” or equivalent policy form in the amount of the initial Contract Sum, plus value of subsequent Contract Modifications and cost of materials supplied or installed by others, comprising total value for the

CITY OF COLORADO SPRINGS

	entire Project at the site on a replacement cost basis without optional deductibles. Such property insurance shall be maintained, unless otherwise provided in the Contract Documents or otherwise agreed in writing by all persons and entities who are beneficiaries of such insurance, until final payment has been made or until no person or entity other than the Owner has an insurable interest in the property.
8.	Professional Liability Insurance covering any damages caused by an error, omission or any negligent Acts with limits of not less than \$1,000,000 per occurrence and in the aggregate. The coverage shall have an extended reporting period of 2 years following the date of substantial completion of the project for reporting of claims.
9.	Pollution Legal Liability Insurance for limits of not less than \$1,000,000 for sudden and accidental incidents including on-site clean-up for new conditions, third party liability for bodily injury and property damage at on-site and off-site locations, and third party clean-up for new and pre-existing conditions.

Except for workers' compensation and employer's liability insurance, the **City of Colorado Springs must be named as an additional insured**. Certificates of Insurance must be submitted before commencing the work and provide 30 days' notice prior to any cancellation, non-renewal, or material changes to policies required under the contract.

All coverage furnished by contractor is primary, and any insurance held by the City of Colorado Springs is excess and non-contributory.

The undersigned certifies and agrees to carry and maintain the insurance requirements indicated above throughout the contract Period of Performance.

\_\_\_\_\_  
*(Name of Company)*

\_\_\_\_\_  
*(Signature)*

\_\_\_\_\_  
*(Date)*

**EXHIBIT 8 TRAIL DETOUR STANDARDS**

Follows this page

# The City of Colorado Springs

## Parks, Recreation and Cultural Services

### Construction Detour Standards for Multi-Use Trails

NOTE: All requirements of a traffic control plan are to be determined and subject to change, at the sole discretion of the City of Colorado Springs. In all cases involving Parks & Recreation sites, notification is required three weeks before the project is to occur; in which case a separate permit may be required. In emergency situations, notification of the Parks, Recreation & Cultural Services Department (385-5940) is required as soon as possible. All detours which will involve Public Works Right-Of-Way (both streets and sidewalks) must be coordinated with the City Traffic Engineer's office (385-5908).

- 1) **User safety must be upheld at all times. Safe access and passage of trail users must be maintained continuously or an approved detour plan implemented with an absolute minimum one-week advance notice given to trail users. Advance notice shall consist of signs located at the construction limits and all accesses serving the affected area, and via press releases (as well as supplemental measures as may be deemed by the City.)**

The following construction operations should be considered as being reasonably foreseeable impediments to user safety:

- Operations of heavy construction equipment on, adjacent to or working directly above bikeways;
  - Painting, spraying, welding, pavement construction and patching, excavating, sawcutting, jackhammering, demolition, etc. or any other construction/maintenance operations affecting the use of the bikeway;
  - Use of bikeway or adjoining area for storage of equipment, construction material, etc.;
  - Any other operation, procedure, etc. which could be reasonably foreseen as affecting the use and operation of the facility;
  - Construction work which may present overhead hazards to trail users, but which will not impact the trail surface i.e. overhead demolition, pipe installation, bridge deck or similar work shall be required to provide a pedestrian shed structure (corresponding to a sidewalk pedestrian shed structure) to protect trail users. If minimal impacts to user safety are determined by the review staff of the agency having jurisdiction on the facility, a flagger or a detour may be permitted;
  - Occasionally, we get into situations where it may be necessary to "detour the detour" as a result of conflicts between construction projects. If these conflicts cannot be identified and avoided up front, then every consideration should be given to minimizing hazards for detoured trail users (including closing an adjoining motor-vehicle lane if no other trail detour option exists.) **Strong consideration should be given to (re)scheduling construction operations so that trail users will not have to deal with open trenches, stockpiled materials, operating equipment, conflicts with construction signs, etc.**
- 2) **Motor-vehicles and Construction Equipment use of Bikeway**
    - Even during emergency repairs, user safety must be upheld. If an emergency shutdown is necessary, strong consideration should be given to providing an alternative route for trail users. Parks, Recreation and Cultural Services should always be informed of any emergency work.
    - The contractor should not use equipment, which could be reasonably foreseen to cause pavement failure or damage (including crawling track damage) unless replacement of the pavement has been agreed upon as part of the permit, except in an emergency.

- Use of bikeway facilities by motor-vehicles for authorized purposes should be limited to vehicles and equipment actually needed for the construction operations. Use of the bikeway area for access and parking by worker's personal motor-vehicles is **not** permitted. Use of personal vehicles may be grounds for revocation of the construction permit.
- Do **not** park motor vehicles/construction equipment on a trail, or use a trail for loading operations, stockpiling of materials, or allowing demolished or spoil materials to be deposited upon the trail surface without the express approval of the facility operating agency.
- When motor-vehicles or construction equipment are parked directly on a trail, safety cones **must** be placed in front of and to the rear of the vehicle or a flagger provided. A "CONSTRUCTION AHEAD" sign must be placed 200' (61m) away from the unit in each direction of the trail (including access routes.) Use of a flashing beacon or supplemental warning devices is highly desirable. Reasonable stopping sight distances must be provided for trail users (or supplemental warnings, including the use of flaggers, provided.) There must be a way for trail users to get around the parked vehicle with a minimum risk and delay.
- "PREPARE TO STOP" signs and flagger may be required when operation will cause occasional, short delays for users.
- When motor-vehicles and construction equipment are parked alongside of the trail, a minimum 3' (1m) clear zone from the trail edge **must** be maintained or the unit relocated to a suitable area (excepting emergencies.) Use of cones, beacons, etc. is highly desirable. Doors, outriggers, buckets, etc. should not be placed or operated in the clear zone (except in emergencies.)

### 3) Operations which will disturb the trail surface for less than one day

- An equivalent width run-around type detour may be acceptable. An absolute minimum width of 4' (1.3m) must be maintained clear of signs, spoil piles, parked or operating equipment, etc.
- The safety of trail users in the affected area (including staging and access areas) will be the sole responsibility of the entity doing the work. Signs, barricades, cones, etc. as specified in the Manual on Uniform Traffic Control Devices should be provided.
- The contractor should consider occupational safety regulations applicable to his workers as a corresponding absolute minimum standard for trail users personal safety e.g. back-up beepers, screens, trench safety, hazardous materials, etc.
- Any trail surface affected (including access and staging) must be returned to it's pre-construction condition (or better) at the end of the day. The trail surface must be swept or washed free of mud, gravel, grease, and excavated, spoil, stockpile materials, etc.
- The trail must allow access (or a reasonable, safe and defined run-around for users) during the operations. The operations should preclude or absolutely minimize materials falling onto the trail or run-around.
- Users **must not** be subjected to shrapnel, sprays/oversprays, welding arcs, noxious fumes, or any other condition which may led to loss of control or personal injury, etc. Immediate removal of materials deposited upon the trail (and run-around) open to users will be required throughout the day.
- A member of the crew should be designated to sweep, flag (including brief periods where the trail must be shut down completely) and provide courteous information and assistance to trail users affected by the operations.
- Run-around detours that are on grass may be used for one day with "Bicyclists Dismount" signage. Hard surface run-around should be provided when it is foreseeable that the work will take longer than one day.

4) **Trail surface disturbed for more than one day or construction necessitating a complete shutdown operation**

The following requirements are based on prior knowledge of the project and should be considered as minimum. (Additions or deletions to these requirements will be handled on a case by case basis, for City approval.):

- When the conditions described in Sections 2 and 3 cannot be upheld (or are reasonably foreseen as being difficult to uphold) or the work will take longer than one (1) day, a shutdown of the trail and provision of a detour should be considered as necessary. Every effort should be made to do the work on a phased basis to reduce the length of detour needed at any given time.
- In all cases, a safe detour must be provided. A warning of trail closure must be provided a **minimum** of one week prior to the approved closure. The dates of the closure, as best as can be forecast, should be provided.
- When the detour is put in place, any or all the following items will be required:
  - A) The width of the detour should be the same width as the trail detoured. An absolute minimum width clearance of 4' must be maintained away from trenches, stockpiled equipment, operating equipment, conflicts with construction signs, etc.
  - B) Advance detour warning no less than 200' (61m) from each end of the detour.
  - C) If the trail will be closed for more than 3 days, a detour plan is required.
  - D) TRAIL CLOSED signs and detour instructions at each end of the detour. These signs will also be required at defined, intermediate access points affected by the detour. Flashing lights shall be provided at all of these locations.
  - E) If the detour will be complex, a route schematic sign should be provided as well.
  - F) All detour route signs will be black on orange, using reflecting sheeting. Sign sizes shall be as shown on the attachments. Flashing lights may be required. **Signs shall be maintained throughout the project.**
  - G) The detour will be delineated by fencing where necessary. Fencing will be provided at detour ends and intermediate access locations and **maintained throughout the project on a daily basis**. Temporary barricades and snow fencing may be used around construction zone operations. However chain link fencing, installed in a rigid, structural manner, may be required at the limits of the project, or at other locations within the project. Temporary fencing, which becomes damaged by trespassers, may need to be replaced with chain link fencing to uphold public safety and minimize conflicts with construction operations.
  - H) Where the detour route will cross major streets and highways, warning signs for motorists unaccustomed to trail users crossing may be required. At some locations, flashing lights may be required in lieu of red flags. (See attached warning sign detail.)
  - I) Manual flagging may be needed dependent on the project and its location. Corresponding FLAGMAN AHEAD or PREPARE TO STOP signage will be provided.
  - J) Dependent on the duration of the project, and trail use, a detour surface may be required. If a detour surface is provided, it must be hard and smooth with slopes less than 8%.
  - K) The contractor doing the construction work shall inspect all the elements of the detour on a daily basis. Any deficiencies shall be rectified immediately. Regular construction inspections by the contractor or the contractor's agents should be made to confirm that the detour measures are sufficient to uphold users safety, **including conditions which may arise after the detour was implemented.**

- L) Maintenance of the detour facilities shall be the sole responsibility of the entity doing the work. This includes snow removal, sweeping, filling holes, etc. on the detour route in use.
- M) Use of private property for detours is strongly discouraged and will be reviewed only on a case by case basis.

**5) Failure to comply with these standards will result in a revoked permit.**

- If damage is done to the trail, an insurance bond may be required for restoration of the trail.

# Construction Sign Examples:


## ADVANCE WARNING SIGN



Statements in parenthesis are subject to change.

### Notes:

1. Black lettering on reflectorized orange sheeting
2. Signs must be in place a minimum of one (1) week prior to trail closure.
3. Signs shall be placed approximately two hundred (200) feet on each side of proposed trail closure.
4. A lateral clearance of three (3) feet must be maintained between edge of sign and nearest edge of trail.


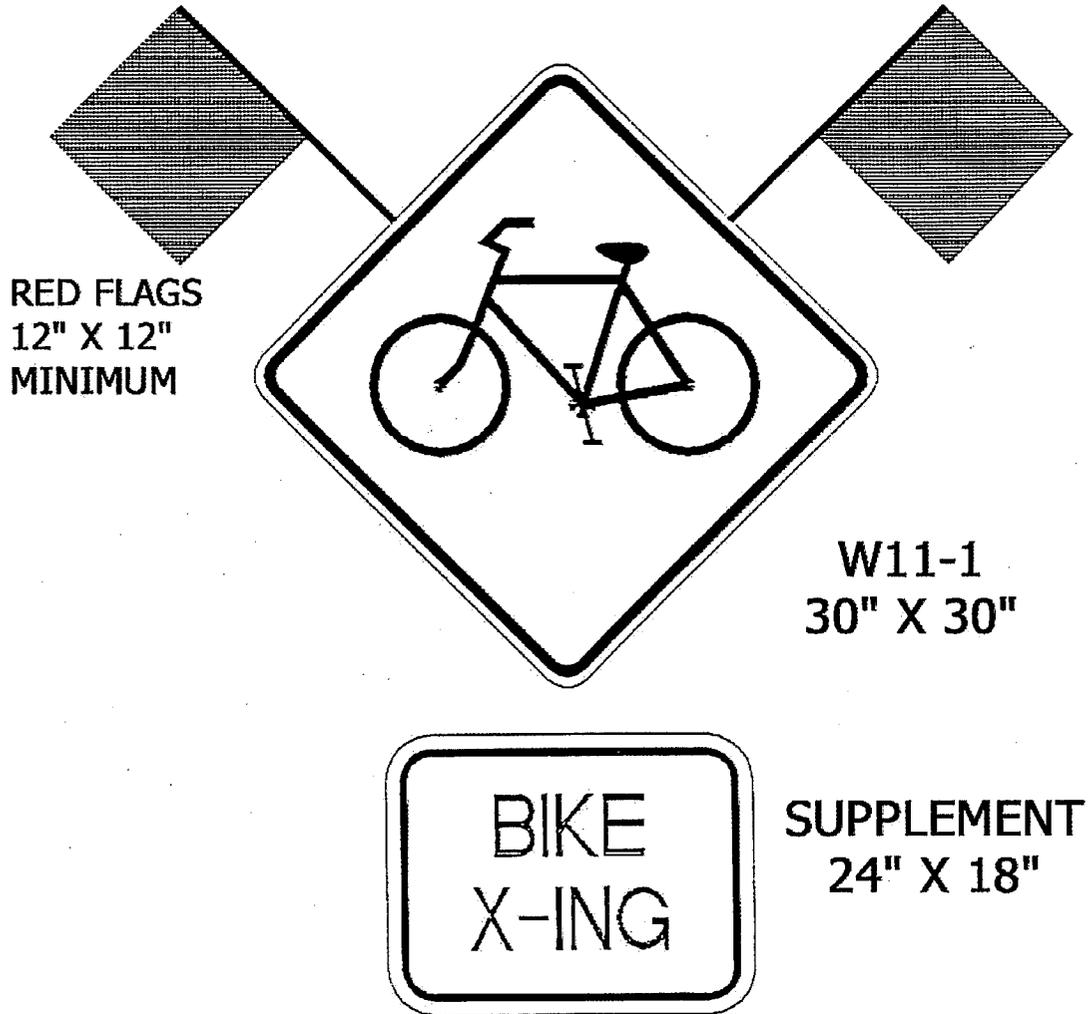


Warning sign array for motorists for use when trail detours will cross streets

Notes:

1. All signs to be reflectorized
2. Signs to be black on yellow
3. Flags to be installed on top of the sign array via brackets on the back of the W11-1 sign

30M4 - 9 (R or L) (SPECIAL)

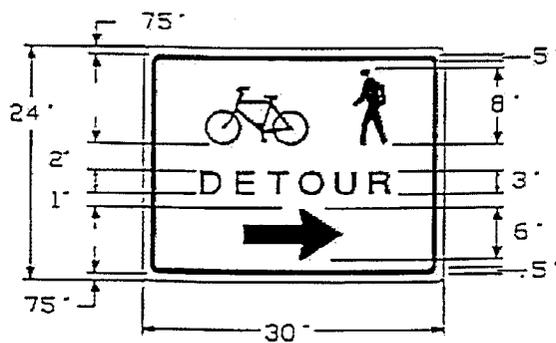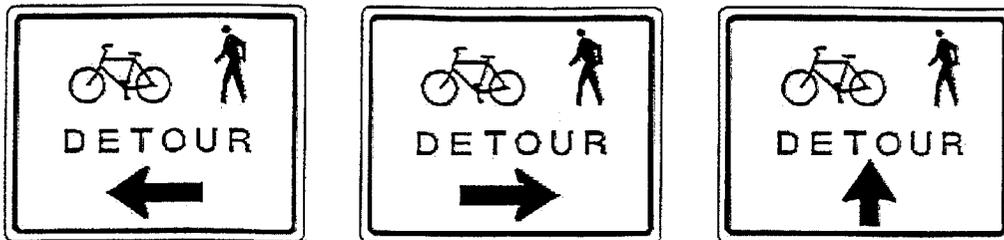

Notes:

1. Signs shall be black image on reflectorized orange background.




48 X 30

**Notes:**


1. Black lettering on white

**EXHIBIT 9      ROCK ISLAND TRAIL DRAWINGS**

Follows this page

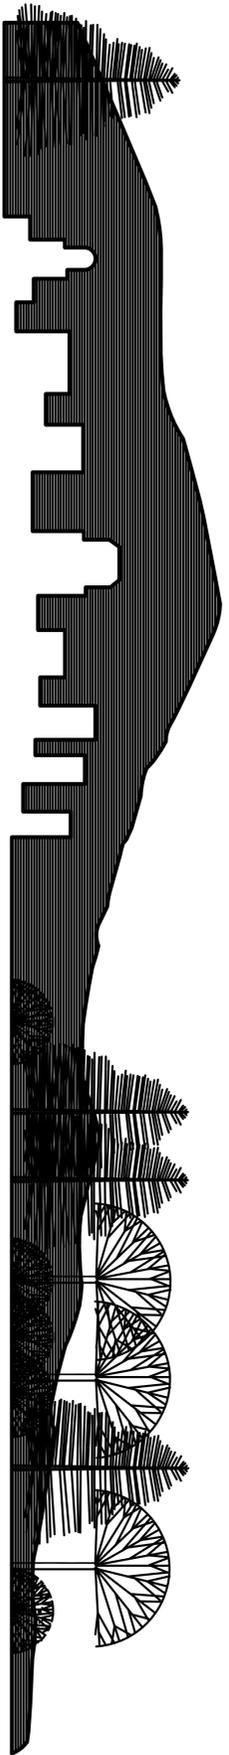

# ROCK ISLAND TRAIL SITE DEVELOPMENT PLANS COVER SHEET

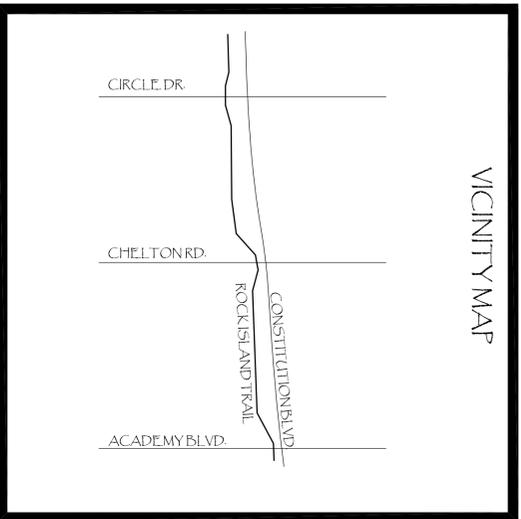

INDEX TO DRAWINGS

NO.	DRAWING
1	Cover Sheet
2	Existing Site Plan
3	Site Development Plan
4	Site Development Plan
5	Site Development Plan
6	Site Development Plan

NOTES

1. ALL SHOWN UTILITY LOCATIONS ARE APPROXIMATE ONLY. AT LEAST 48 HOURS PRIOR TO ANY LOCATING AND/OR TYPING OF UTILITY LOCATIONS, THE CONTRACTOR SHALL BE REQUIRED TO CALL 385-6551 FOR LOCATES FROM THE CITY OF COLORADO SPRINGS PARKS, RECREATION AND CULTURAL SERVICES. THE CONTRACTOR SHALL ALSO BE RESPONSIBLE TO CONTACT UTILITY NOTIFICATION CENTER OF COLORADO, (800) 922-1897 AND SUPPLY A COPY OF THE LOCATE SHEETS TO THE OWNER'S REPRESENTATIVE.
2. ANY DAMAGE TO EXISTING IMPROVEMENTS, WHETHER ON PARK, SCHOOL OR PRIVATE PROPERTY, IS TO BE RETURNED TO ORIGINAL CONDITIONS AT CONTRACTOR'S EXPENSE.

FILE NUMBER:  
SHEET 1  
OF 6 SHEETS

TITLE:  
ROCK ISLAND TRAIL  
SITE DEVELOPMENT PLANS  
CONSTRUCTION DETAILS





DESIGNED BY: S. BRYARLY  
DRAWN BY: S. BRYARLY  
DATE: 5/11/2016  
SCALE:  
REVISIONS:





DETAIL NUMBER  
 SHEET WHERE DETAIL IS DRAWN  
 DETAIL BUBBLE LEGEND






SHEET 2  
 OF 6 SHEETS  
 FILE NUMBER:

TITLE:  
**2D: ROCK ISLAND TRAIL**  
 SITE DEVELOPMENT PLANS  
 DEVELOPMENT PLANS





DESIGNED BY: S. BRYARLY  
 DRAWN BY: S. BRYARLY  
 DATE: SUMMER, 2016  
 SCALE: 1"=40'  
 REVISIONS:



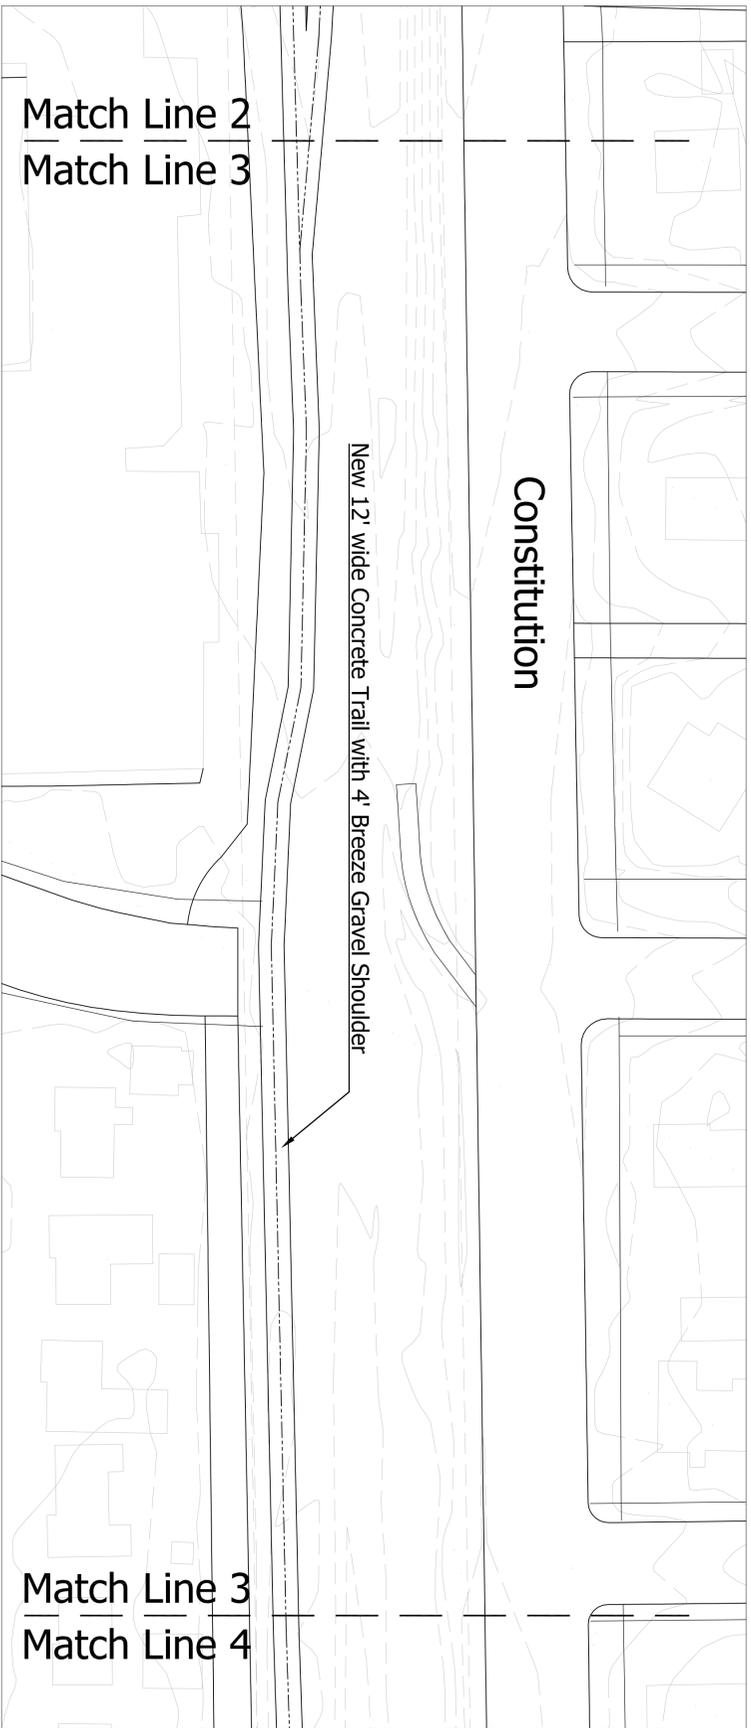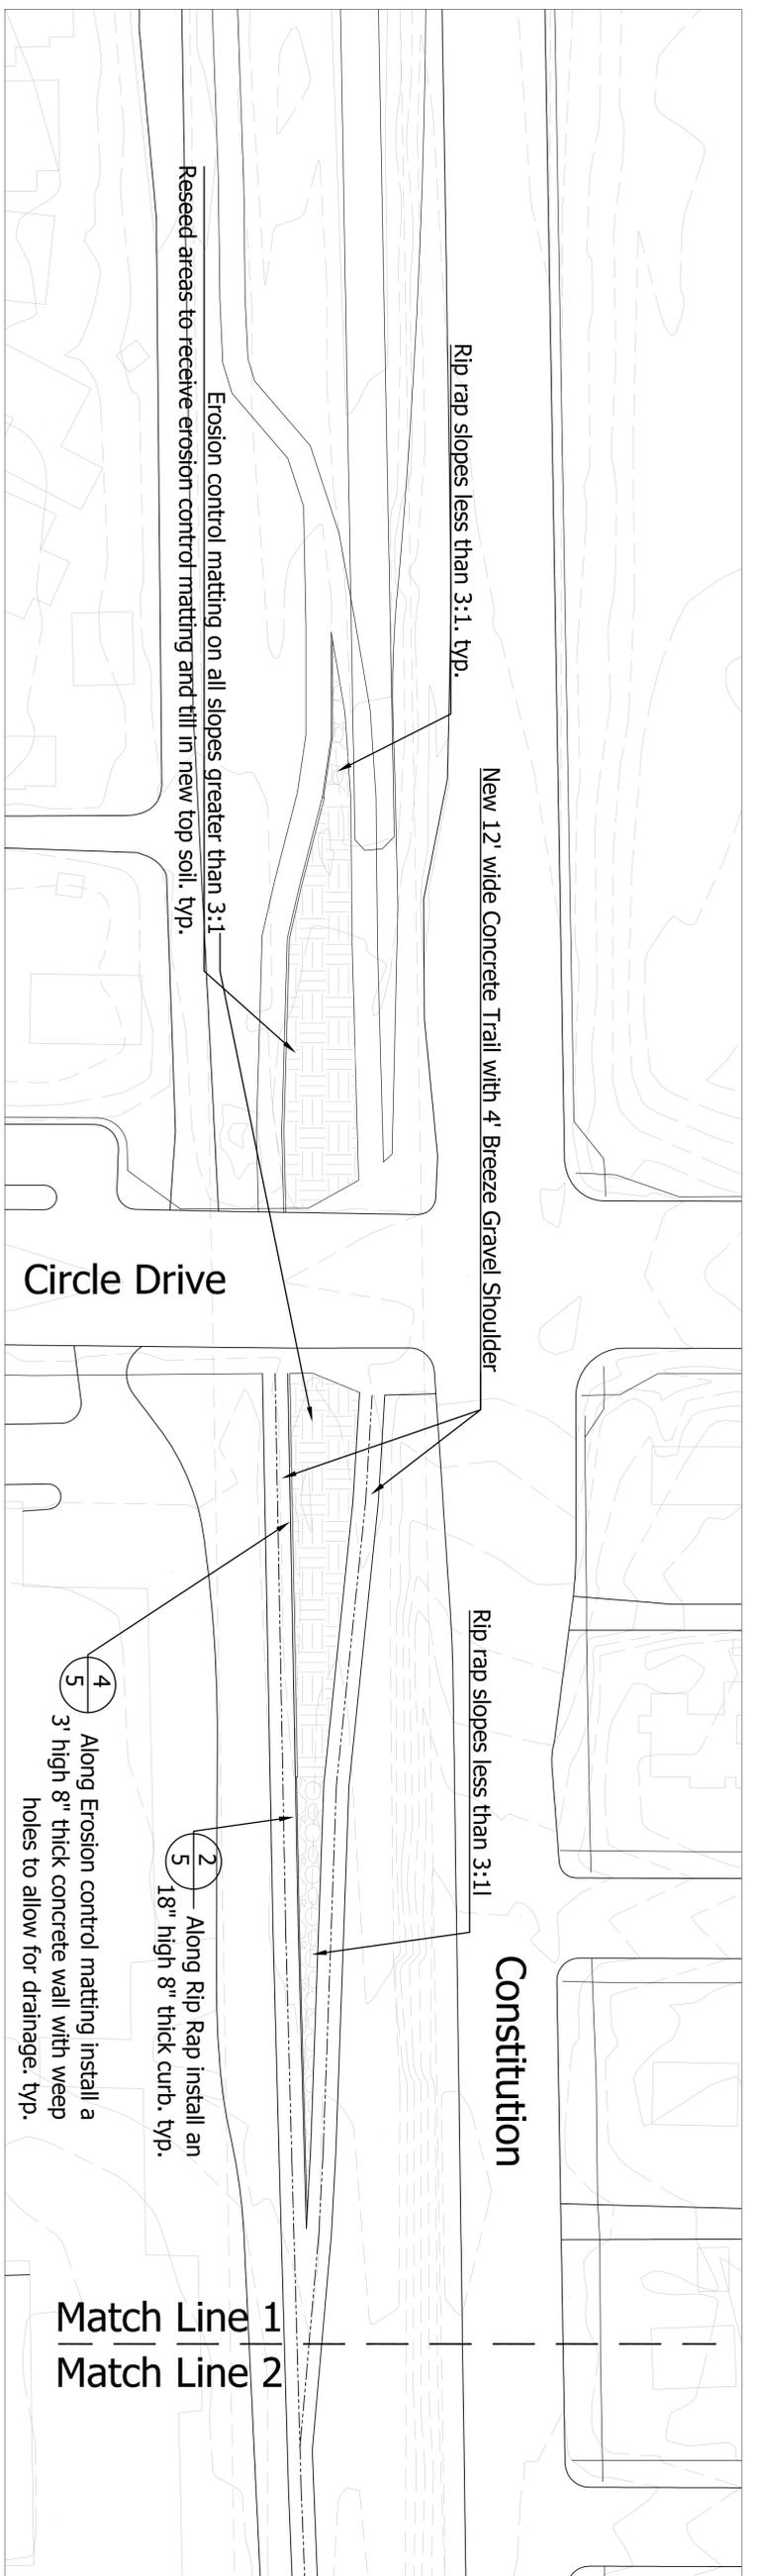

2 DETAIL NUMBER  
SHEET WHERE DETAIL IS DRAWN  
DETAIL BUBBLE LEGEND





SHEET 3  
OF 6 SHEETS  
FILE NUMBER:

TITLE:  
2D: ROCK ISLAND TRAIL  
SITE DEVELOPMENT PLANS  
DEVELOPMENT PLANS



DESIGNED BY: S. BRYARLY  
DRAWN BY: S. BRYARLY  
DATE: SUMMER, 2016  
SCALE: 1"=40'  
REVISIONS:



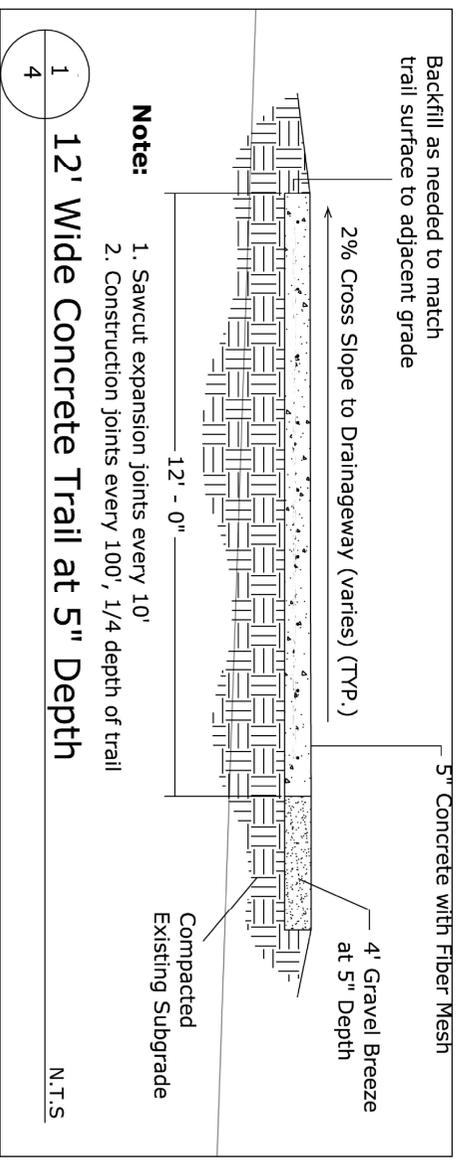
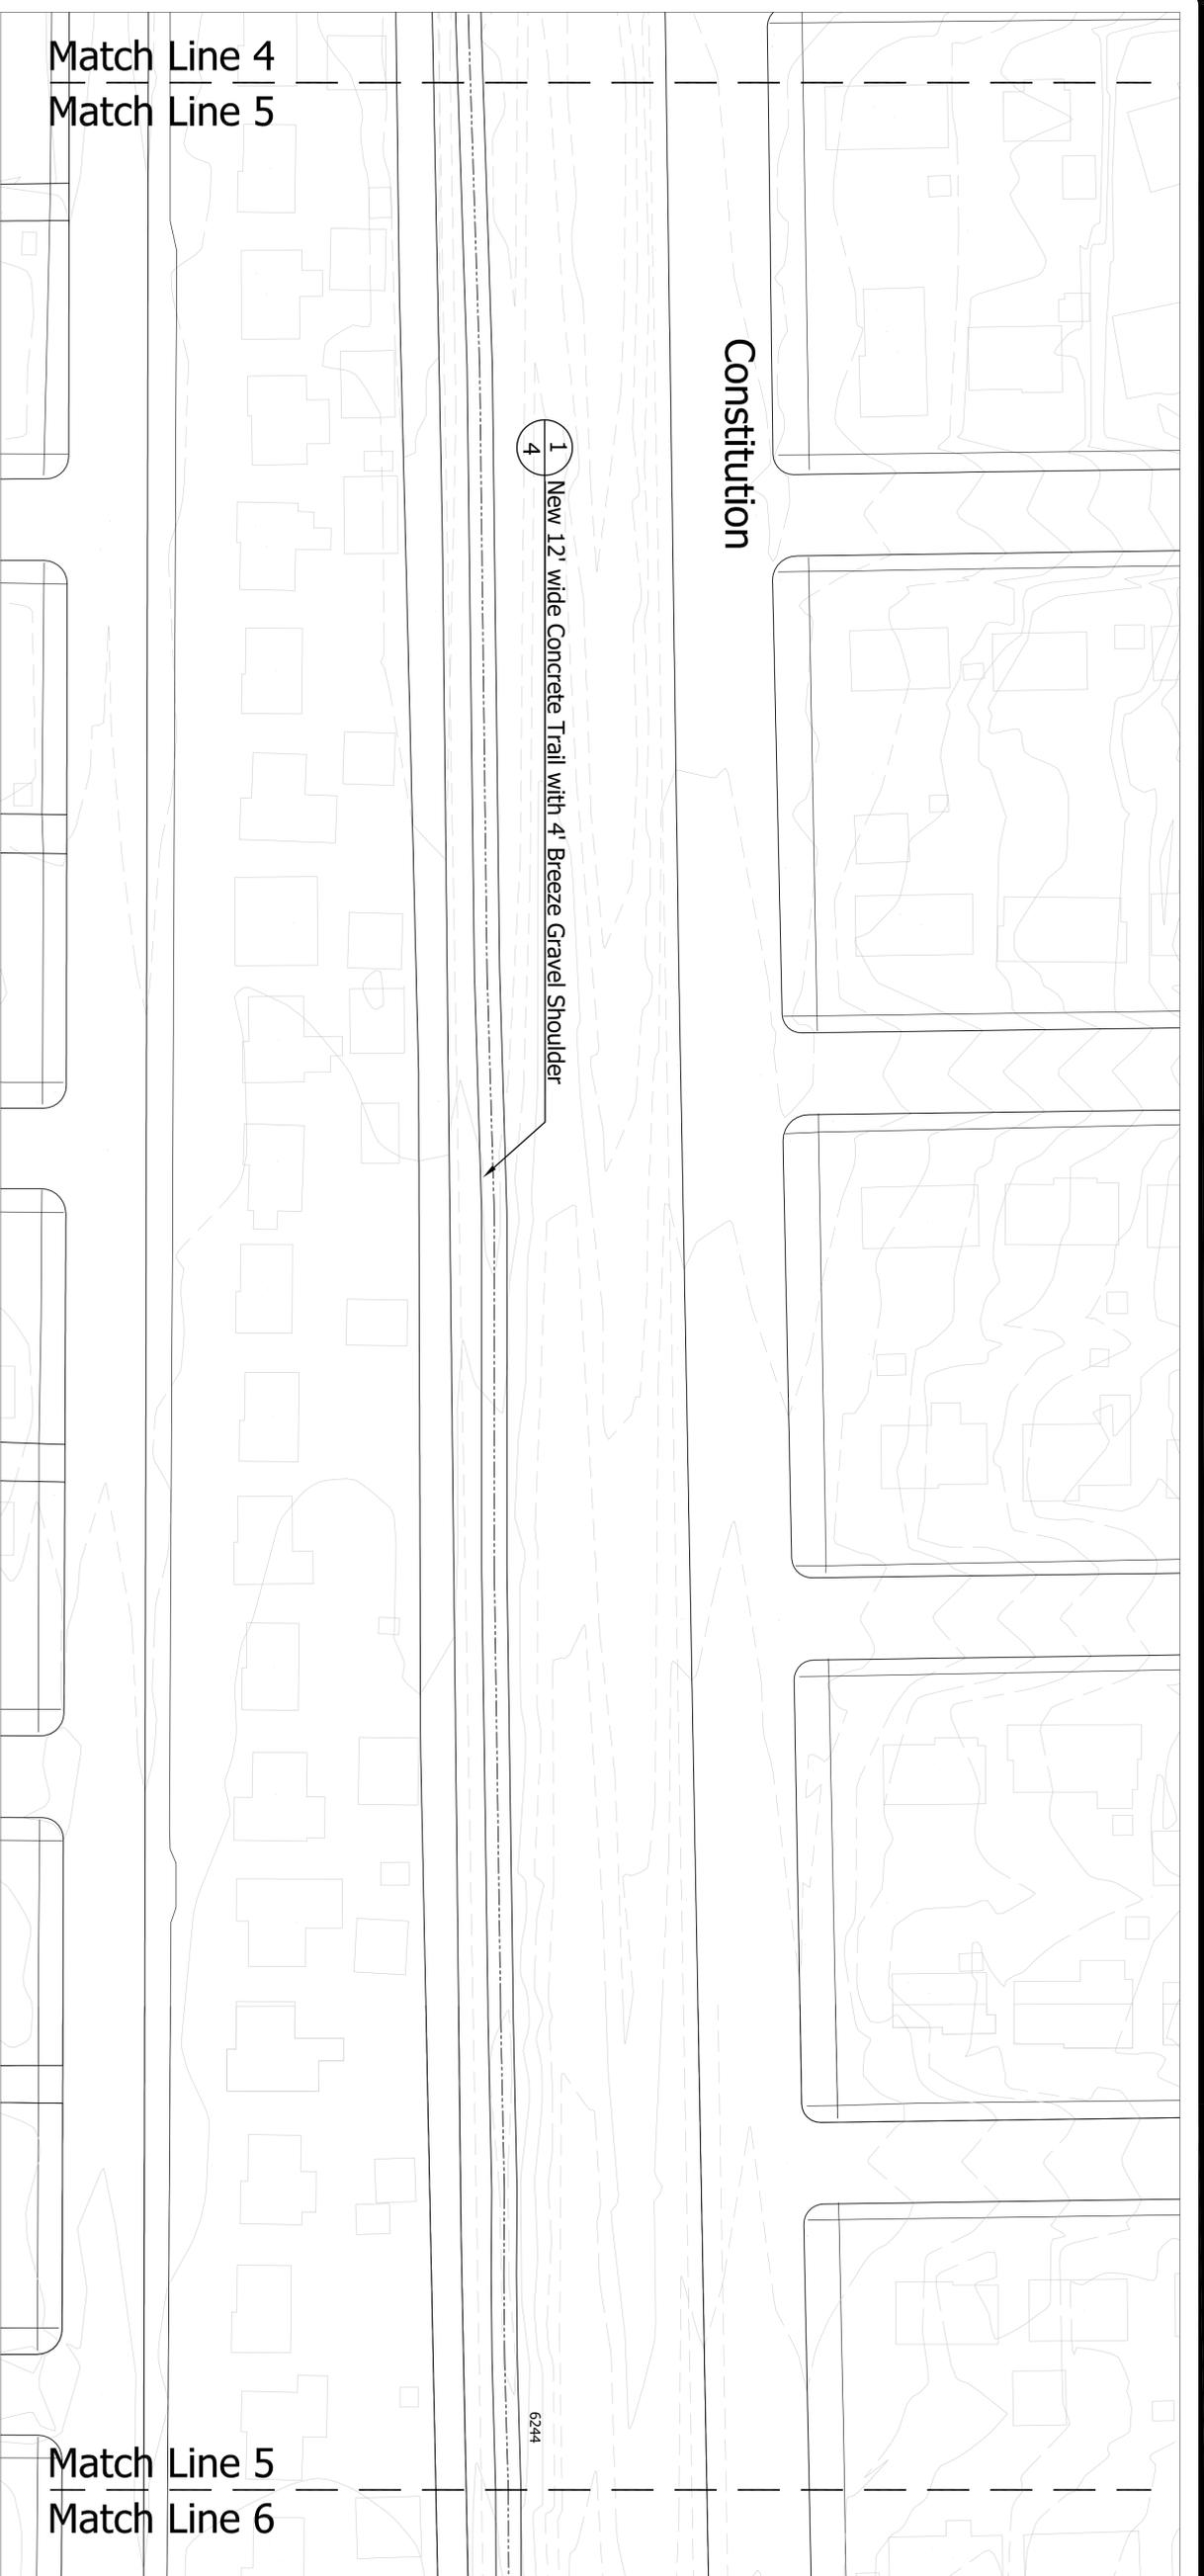


- Note:**
1. Sawcut expansion joints every 10'
  2. Construction joints every 100', 1/4 depth of trail

**12' Wide Concrete Trail at 5" Depth**

N.T.S.

② DETAIL NUMBER  
SHEET WHERE DETAIL IS DRAWN  
**DETAIL BUBBLE LEGEND**

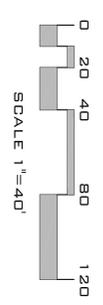







FILE NUMBER:  
SHEET 4  
OF 6 SHEETS

TITLE:  
**2D: ROCK ISLAND TRAIL  
SITE DEVELOPMENT PLANS**  
DEVELOPMENT PLANS



DESIGNED BY: S. BRYARLY  
DRAWN BY: S. BRYARLY  
DATE: SUMMER, 2016  
SCALE: 1"=40'  
REVISIONS:



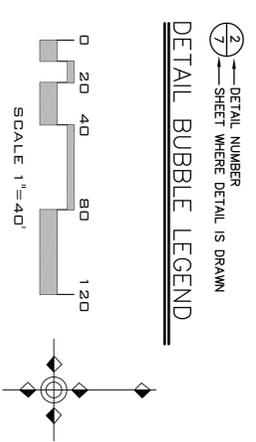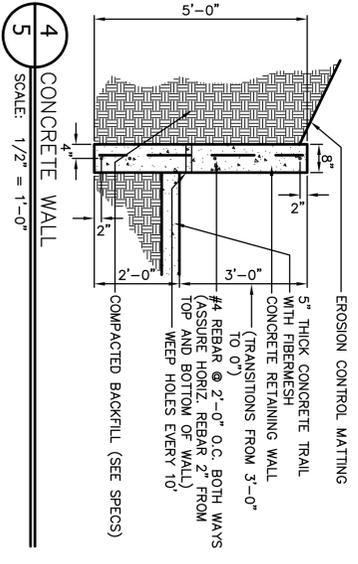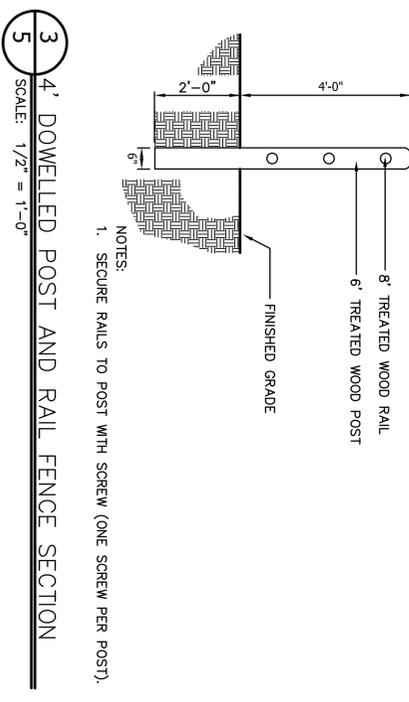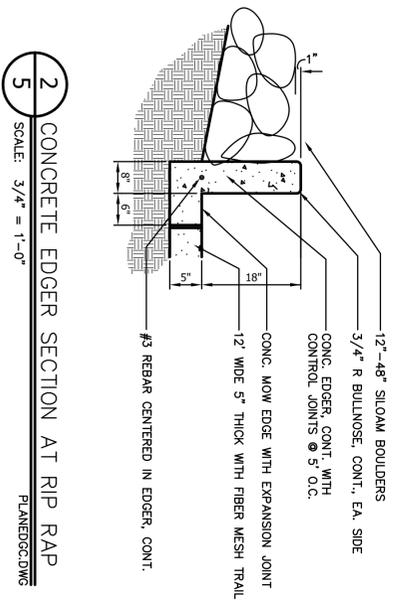
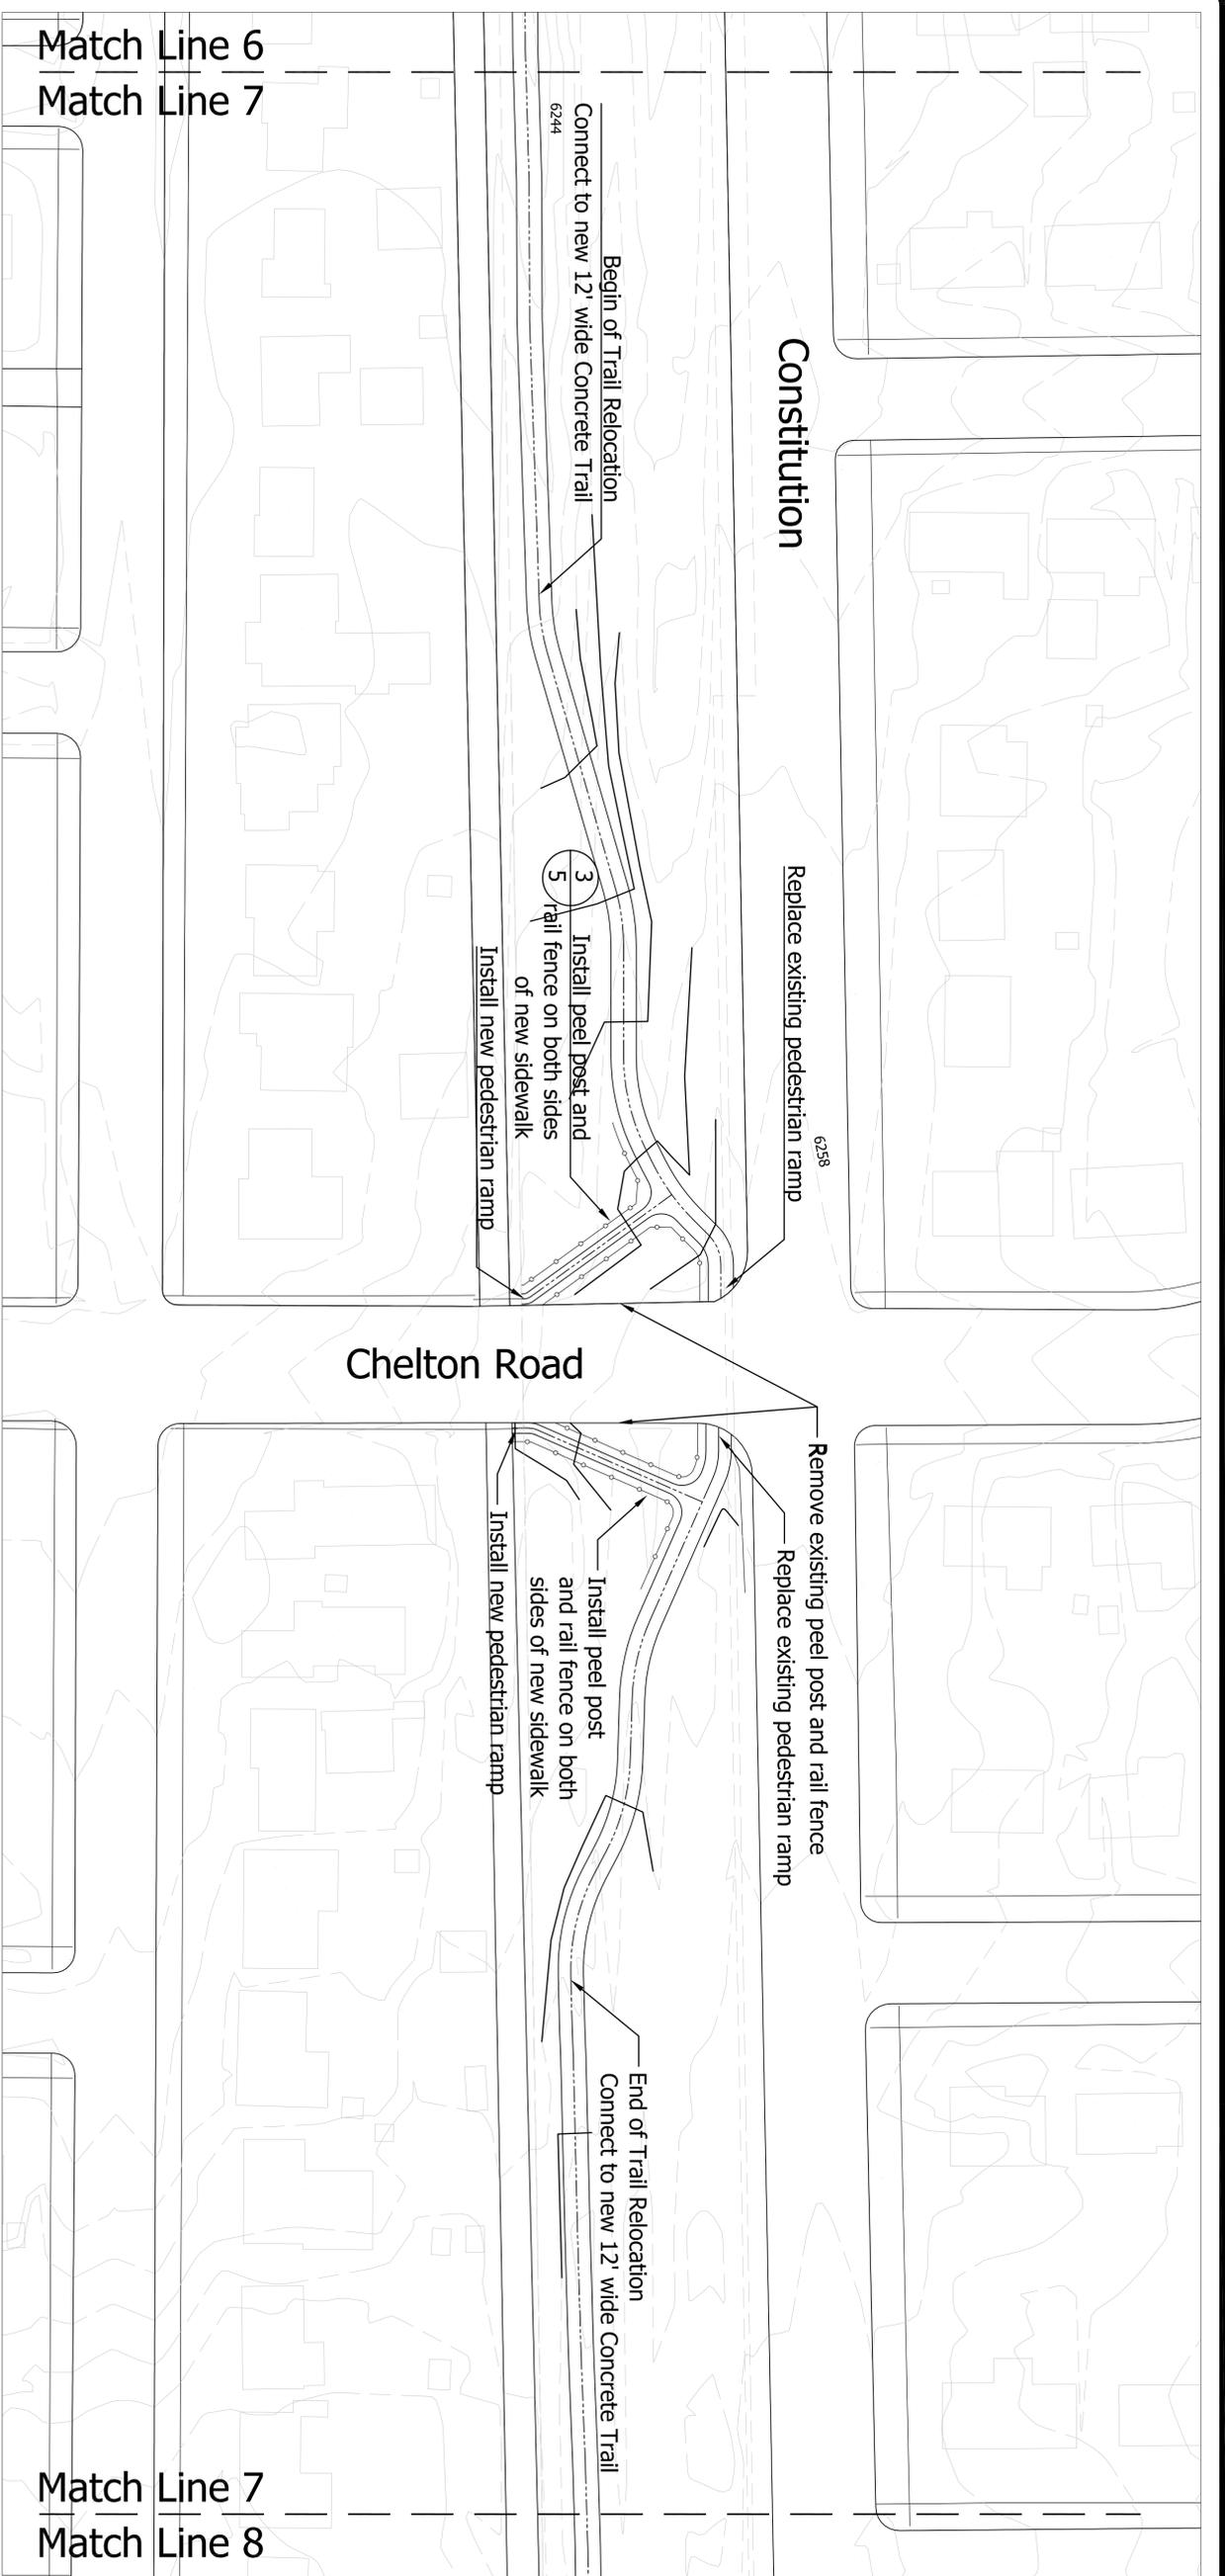


<b>FILE NUMBER:</b> 	<b>SHEET</b> OF 6 SHEETS 5	<b>TITLE:</b> 2D: ROCK ISLAND TRAIL SITE DEVELOPMENT PLANS DEVELOPMENT PLANS	CITY OF COLORADO SPRINGS PARKS, RECREATION AND CULTURAL SERVICES 1401 RECREATION WAY, COLORADO SPRING CO 80905 (719) 385-5940	<b>DESIGNED BY:</b> S. BRYARLY
	<b>OF 6 SHEETS</b> 5			<b>DRAWN BY:</b> S. BRYARLY
<b>FILE NUMBER:</b>				<b>DATE:</b> SUMMER, 2016
				<b>SCALE:</b> 1" = 40'
				<b>REVISIONS:</b>



② DETAIL NUMBER  
SHEET WHERE DETAIL IS DRAWN

DETAIL BUBBLE LEGEND



FILE NUMBER:

SHEET 6  
OF 6 SHEETS

TITLE:

2D: ROCK ISLAND TRAIL  
SITE DEVELOPMENT PLANS  
DEVELOPMENT PLANS



DESIGNED BY: S. BRYARLY

DRAWN BY: S. BRYARLY

DATE: SUMMER, 2016

SCALE: 1"=40'

REVISIONS:

